


# Rosemount™ Volume 1 Temperature Sensors and Accessories (English)

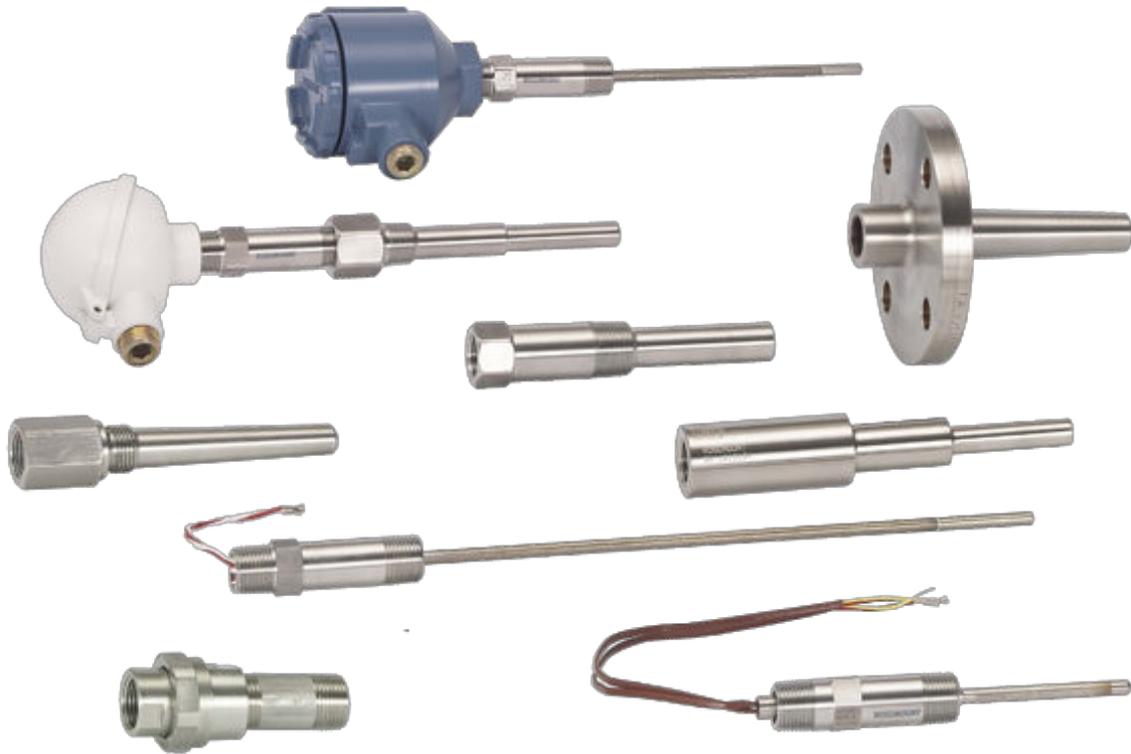

- RTD and thermocouple offering in single and dual sensor models
- Barstock thermowell offering in wide range of materials and process connections
- Calibration capabilities for increased measurement accuracy
- Sanitary RTD for hygienic applications

## Feature and benefits

### Optimize plant efficiency and increase measurement reliability with industry-proven design and specifications

- Available in a variety of sensing technologies – RTD and thermocouples
- All sensor styles and lengths are available in ¼-in. diameter.
- State-of-the-art manufacturing procedures provide robust element packaging, increasing reliability.
- Industry-leading calibration capabilities allow for Callendar-Van Dusen values to give increased accuracy when paired with Rosemount transmitters.
- Optional Class A accuracy for critical temperature measurement points.
- Sanitary offering provides sensor assemblies approved for hygienic applications.

### Streamline operations and maintenance with sensor and thermowell design


- Spring loaded threaded adapter, general-purpose welded adapter, capsule, and bayonet styles offer remote or integral transmitter mounting configuration

---

## Contents

Feature and benefits.....	2
Introduction.....	4
Rosemount 68 Sensor and Thermowell.....	6
Rosemount 78 Sensor and Thermowell.....	22
Rosemount 183 Sensor and Thermowell.....	39
Rosemount 68Q Sanitary Sensor.....	54
Rosemount 58C Cut-to-Fit Sensor.....	58
Rosemount Series 91 Thermowells.....	61
How to decide what to order.....	70
Spring-loaded sensor dimensions.....	72
Dimensional drawings.....	75
Temperature sensor assemblies.....	78
Rosemount Series 68 Platinum RTD.....	81
Rosemount Series 78 Platinum RTD.....	83
Rosemount Series 183 Thermocouple.....	86
Rosemount Series 68Q Sanitary Platinum RTD .....	89
Rosemount Series 58C Platinum RTD.....	93
Calibration.....	95
Mounting accessories.....	102
Thermowells.....	111
Product Certifications.....	122

## Explore the benefits of a Complete Point Solution™ temperature measurement

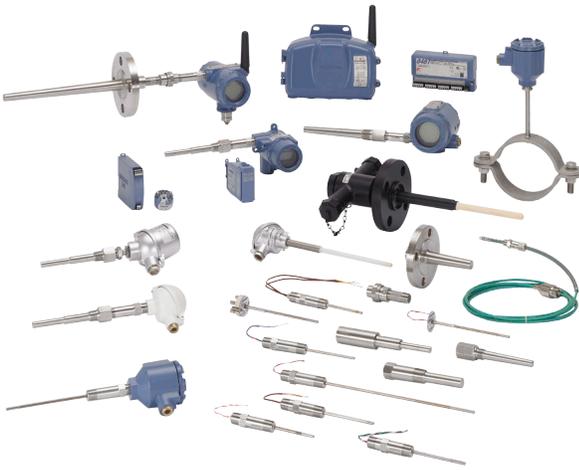

- An “Assemble Sensor to Specific Transmitter” option enables Emerson to provide a complete point temperature solution, delivering an installation-ready transmitter and sensor assembly.
- Emerson has a complete portfolio of single point and high density temperature measurement solutions, allowing you to effectively measure and control your processes with the reliability you trust from Rosemount products.

## Experience global consistency and local support from numerous worldwide Emerson manufacturing sites



- World-class manufacturing provides globally consistent product from every factory and the capacity to fulfill the needs of any project, large or small.
- Experienced Instrumentation consultants help select the right product for any temperature application and advise on best installation practices.
- An extensive global network of Emerson service and support personnel can be on-site when and where they are needed.

## Access information when you need it with asset tags

Newly shipped devices include a unique QR code asset tag that enables you to access serialized information directly from the device. With this capability, you can:

- Access device drawings, diagrams, technical documentation, and troubleshooting information in your MyEmerson account
- Improve mean time to repair and maintain efficiency
- Ensure confidence that you have located the correct device
- Eliminate the time-consuming process of locating and transcribing nameplates to view asset information

# Introduction

## Overview

Emerson offers a wide variety of RTD and thermocouple sensors that are available alone or as complete assemblies including connection heads, thermowells, and extension fittings. In addition to complete assemblies, Emerson offers heads, coupling/nipple and union/nipple extensions, compression fittings, and thermowells.

## Using this Product Data Sheet (PDS)

Use this PDS to order complete temperature sensor assemblies, which include sensors, thermowells, extensions, and connection heads. These options can also be ordered separately. For example, you can order a thermowell, extension, or connection head for use with an existing sensor. In each case it is important to know and understand the sections of this PDS when specifying the items.

<b>Threaded sensors and assemblies</b>	Includes descriptions, specifications, and ordering information for Rosemount Series 58C, 68, 68Q, and 78 RTDs, and the Series 183 Thermocouples. Includes information for ordering sensors, connection heads, extensions, and thermowells as complete assemblies.
<b>Calibration</b>	Includes characterization schedules and information for ordering calibrated Rosemount Series 68, 68Q, and 78 RTD Sensors. Includes information regarding the use of Callendar-Van Dusen constants to match specific Rosemount Series 68, 68Q, and 78 RTDs to Rosemount Smart Temperature Transmitters
<b>Sensor accessories</b>	Includes descriptions, specifications, and ordering information for temperature accessories such as thermowells, extensions, connection heads, mounting adapters, lead wire extensions, connectors, and thermowells.
<b>Hazardous area approvals</b>	Includes descriptions of the FM, CSA, IECEx, and ATEX approvals for sensors and connection heads.
<b>Configuration Data Sheet (CDS)</b>	Provides a form used for thermowell application calculations.
<b>RTD</b>	Rosemount Series 58C, 68, 68Q, and 78 Platinum RTD Temperature Sensors are primarily used when high accuracy, durability, and long-term stability are required. These sensors conform to international standards: IEC 751:1983, Amendments 1 and 2. <sup>(1)</sup>
<b>Rosemount Series 58C Platinum RTD Temperature Sensors</b>	Combine an economical thin-film design with a sheath that can be shortened to any length with tubing cutter.
<b>Rosemount Series 68Q Quick Response Sanitary RTD Sensors</b>	Conform to 3-A Sanitary Standards and feature product contact surfaces designed for CIP cleaning.
<b>Rosemount Series 68 Platinum RTD Temperature Sensors</b>	Provide high performance in an economical thin-film design.
<b>Rosemount Series 78 Platinum RTDs Temperature Sensors</b>	Use a wire-wound element which allows for a broader measurement range.

(1) 100 ohms at 0 °C, a = 0.00385 ohms/ohm/°C.

## Thermocouples

Rosemount Series 183 Thermocouple Temperature Sensors conform to ASTM E-230, and are available in types J, K, E, and T.


Rosemount Series 183 Thermocouple Temperature Sensors are available:

- Grounded or ungrounded
- Isolated or unisolated
- With immersion lengths from 2- to 48-in.

## Use of 2-, 3-, and 4-wire RTDs


To help you attain the highest possible temperature measurement accuracy, Rosemount provides 4-wire sensors for all single element RTDs. You can use these RTDs in 2-, 3-, or 4-wire configurations by simply securing the unneeded leads with tape. To properly wire the 4-wire RTD for use in a 2-, 3-, or 4-wire configuration, refer to the following wiring diagrams:

### 2-wire configuration




2-wire RTDs provide one connection to each end of the sensor. In a 2-wire configuration, lead wires add resistance to the circuit which cannot be compensated. The 2-wire configuration is rarely used because the added lead wire resistance can cause substantial errors in the temperature reading.

### 3-wire configuration



3-wire RTDs provide one connection to one end of the sensor, and two connections to the other end. The 3-wire approach does not eliminate all lead wire effects. However, for sensors with lead wires of the same length, lead wire effects are slight, and the approach provides reasonable accuracy.

### 4-wire configuration



The most effective way to eliminate lead wire effects is with two connections at each end of the sensor. 4-wire RTDs fully compensate for lead wire effects.

## Benefits and limitations of RTDs when compared to thermocouples

### Benefits

- Higher accuracy
- Better linearity and long-term stability
- Cold junction compensation not required
- Special extension lead wire not required
- Less susceptible to noise
- Can be “matched” to a Rosemount transmitter with transmitter sensor matching

### Limitations

- Lower maximum temperature limit
- Slower response time in applications without a thermowell
- Reduced resistance to vibration-induced failure

## Rosemount 68 Sensor and Thermowell



The Rosemount 68 Sensor and Thermowell have designs that provide flexible and reliable temperature measurements in process environments.

Features include:

- Industry-standard Pt-100 RTD
- Variety of enclosure and connection head options
- Global hazardous-location approvals
- Calibration services to give you insight to sensor performance
- Calibration certification documentation to accompany sensor
- Assemble to transmitter option

[VIEW PRODUCT >](#)

### Online Product Configurator

Many products are configurable online using our Product Configurator. Select the **Configure** button or visit our [website](#) to start. With this tool's built-in logic and continuous validation, you can configure your products more quickly and accurately.

### Model codes

Model codes contain the details related to each product. Exact model codes will vary; an example of a typical model code is shown in [Figure 1](#).

**Figure 1: Model Code Example**

3144P D1 A 1 NA    M5 DA1 Q4  
                           **1**                            **2**

1. Required model components (choices available on most)
2. Additional options (variety of features and functions that may be added to products)

## Specifications and options

See the Specifications and options section for more details on each configuration. Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See the Material selection section for more information.

## Rosemount Series 68 RTD Sensor Assemblies without Thermowell

### Required model components

#### Model

Code	Description	
0068	Platinum temperature sensor without thermowell	★

#### Connection head

Code	Description	
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
D	Rosemount aluminum connection head with ½-in. entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

#### Sensor type (single element -58 to 752 °F [-50 to 400 °C])

Code	Description	
01 <sup>(1)(2)</sup>	Capsule style	★
11 <sup>(3)</sup>	General-purpose style	★
21	Spring-loaded style	★
31 <sup>(4)</sup>	Bayonet spring-loaded style (available in [X] lengths of 1- to 21-in., increments of 1-in.)	

(1) Capsule style available in 1-in. increments only, starting at 1-in.

(2) This option can only be used with sensor lead wire termination code N and is not available with assembly code XA or with approval options.

(3) General-purpose sensors are only available in (L) lengths of 2.5-in. or greater.

(4) Not available with sensor lead wire termination codes R, P, or C or with approval options.

#### Extension type and material

Code	Extension type	Material	
A <sup>(1)</sup>	Nipple coupling	300 series SST	★
C <sup>(1)</sup>	Nipple union	300 series SST	★
N	None (use with extension length option code 00)	None	

(1) Codes A and C must be used with an Extension Length.

#### Extension length (E)

Code	Description	
00	00-in.	★

Code	Description	
30	3.0-in.	★
60	6.0-in.	★

#### Thermowell material

Code	Description	
N	No thermowell required	★

#### Sensor immersion length (L)

Code	Description	
010 <sup>(1)</sup>	1.0-in.	★
015	1.5-in.	★
020	2.0-in.	★
025	2.5-in.	★
030	3.0-in.	★
035	3.5-in.	★
040	4.0-in.	★
045	4.5-in.	★
050	5.0-in.	★
055	5.5-in.	★
060	6.0-in.	★
065	6.5-in.	★
070	7.0-in.	★
075	7.5-in.	★
080	8.0-in.	★
085	8.5-in.	★
090	9.0-in.	★
095	9.5-in.	★
100	10.0-in.	★
105	10.5-in.	★
110	11.0-in.	★
115	11.5-in.	★
120	12.0-in.	★
125	12.5-in.	★
130	13.0-in.	★
135	13.5-in.	★
140	14.0-in.	★

Code	Description	
145	14.5-in.	★
150	15.0-in.	★
155	15.5-in.	★
160	16.0-in.	★
165	16.5-in.	★
170	17.0-in.	★
175	17.5-in.	★
180	18.0-in.	★
185	18.5-in.	★
190	19.0-in.	★
195	19.5-in.	★
200	20.0-in.	★
205	20.5-in.	★
210	21.0-in.	★
215	21.5-in.	★
220	22.0-in.	★
225	22.5-in.	★
230	23.0-in.	★
235	23.5-in.	★
240	24.0-in.	★
245	24.5-in.	★
250	25.0-in.	★
260	26.0-in.	★
270	27.0-in.	★
280	28.0-in.	★
290	29.0-in.	★
300	30.0-in.	★
310	31.0-in.	★
320	32.0-in.	★
330	33.0-in.	★
340	34.0-in.	★
350	35.0-in.	★
360	36.0-in.	★
370	37.0-in.	★
380	38.0-in.	★
390	39.0-in.	★

Code	Description	
400	40.0-in.	★
410	41.0-in.	★
420	42.0-in.	★
430	43.0-in.	★
440	44.0-in.	★
450	45.0-in.	★
460	46.0-in.	★
470	47.0-in.	★
480	48.0-in.	★

(1) 1-in. length without extension is only available in capsule style.

## Additional options

### Approval options

Code	Description	
E1	ATEX Flameproof approval	★
E2	Ex d- CEPEL Flameproof approval- Brazil	★
E5	FM Explosion-proof approval	★
E6	CSA Explosion-proof approval	★
E7	IECEX Flameproof approval	★
EM	Technical Regulations Customs Union (EAC) Flameproof	★
KD	Combination of FM Explosion-proof, CSA Explosion-proof, and ATEX Flameproof approval	★
KF	Combination of ATEX Flameproof and CSA Explosion-proof approval	★

### Callendar-Van Dusen constant

Code	Description	
V1-V7	Callendar-Van Dusen constant	★

### Calibration schedule

Code	Description	
X8	Customer-specified temperature range calibration	★
X9	Customer-specified single temperature point calibration	★

### Calibration certification

Code	Description	
Q4	Calibration certification, customer-specified temperature	★

**Mounting adapters**

Code	Description	
M5–M7	Mounting adapter: Sensor compression fitting: 1/8–27 NPT, M6 = 1/4–18 NPT, M7 = 1/2–14 NPT	★

**A Leadkit**

Code	Description	
A1–A8	Twisted lead wire extension: A1 = 1.5 ft., A2 = 3.0 ft., A3 = 6.0 ft., A4 = 12 ft., A5 = 24 ft., A6 = 50 ft., A7 = 75 ft., A8 = 100 ft.	★

**B Leadkit**

Code	Description	
B1–B8	Shielded cable lead wire extension: B1 = 1.5 ft., B2 = 3.0 ft., B3 = 6.0 ft., B4 = 12 ft., B5 = 24 ft., B6 = 50 ft., B7 = 75 ft., B8 = 100 ft.	★

**C Leadkit**

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
C1–C8	Armored cable lead wire extension: C1 = 1.5 ft., C2 = 3.0 ft., C3 = 6.0 ft., C4 = 12 ft., C5 = 24 ft., C6 = 50 ft., C7 = 75 ft., C8 = 100 ft.	★

**D Leadkit**

These options are only available with sensor lead wire termination code N.

Code	Description	
D1–D8	Armored cable lead wire extensions with electrical plug: D1 = 1.5 ft., D2 = 3.0 ft., D3 = 6.0 ft., D4 = 12 ft., D5 = 24 ft., D6 = 50 ft., D7 = 75 ft., D8 = 100 ft.	★
L1–L8	Armored cable mating plugs with lead wire extension: L1 = 1.5 ft., L2 = 3.0 ft., L3 = 6.0 ft., L4 = 12 ft., L5 = 24 ft., L6 = 50 ft., L7 = 75 ft., L8 = 100 ft.	★

**J Leadkit**

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
J1	Moisture-proof seal assembly for armored cables	★

**Assemble to options**

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount Series 68 RTD Sensor Assemblies with Thermowell

### Required model components

#### Model

Code	Description	
0068	Platinum temperature sensor without thermowell	★

#### Connection head

Code	Description	
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
D	Rosemount aluminum connection head with ½-in. entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

#### Sensor type (single element -50 to 400 °C [-58 to 752 °F])

Code	Description	
11	General-purpose style	★
21	Spring-loaded style	★
31 <sup>(1)</sup>	Bayonet spring-loaded style (available in (X) lengths of 1- to 21-in., increments of 1-in.)	★

(1) Not available with sensor lead wire termination codes R, P, or C or with approval options.

#### Extension type and material

Code	Extension type	Material	
A <sup>(1)</sup>	Nipple coupling	300 series SST	★
C <sup>(1)</sup>	Nipple union	300 series SST	★
N	None (use with extension length option code 00)	None	

(1) Codes A and C must be used with an Extension Length.

#### Extension length (E)

Code	Description	
00	00-in.	★
30	3.0-in.	★
60	6.0-in.	★

**Thermowell material**

Code	Description	
N	No thermowell required	★

**Immersion (U), Thermowell (L), and Lagging (T) Length**

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
015 <sup>(3)</sup>	1.5-in.	4.0-in.	1.0-in.	★
020 <sup>(3)</sup>	2.0-in.	4.0-in.	0.5-in.	★
025 <sup>(3)</sup>	2.5-in.	4.0-in.	0.0-in.	★
030	3.0-in.	6.0-in.	1.5-in.	★
035	3.5-in.	6.0-in.	1.0-in.	★
040	4.0-in.	6.0-in.	0.5-in.	★
045	4.5-in.	6.0-in.	0.0-in.	★
050	5.0-in.	9.0-in.	2.5-in.	★
055	5.5-in.	9.0-in.	2.0-in.	★
060	6.0-in.	9.0-in.	1.5-in.	★
065	6.5-in.	9.0-in.	1.0-in.	★
070	7.0-in.	9.0-in.	0.5-in.	★
075	7.5-in.	9.0-in.	0.0-in.	★
080	8.0-in.	12.0-in.	2.5-in.	★
085	8.5-in.	12.0-in.	2.0-in.	★
090	9.0-in.	12.0-in.	1.5-in.	★
095	9.5-in.	12.0-in.	1.0-in.	★
100	10.0-in.	12.0-in.	0.5-in.	★
105	10.5-in.	12.0-in.	0.0-in.	★
110	11.0-in.	15.0-in.	2.5-in.	★
115	11.5-in.	15.0-in.	2.0-in.	★
120	12.0-in.	15.0-in.	1.5-in.	★
125	12.5-in.	15.0-in.	1.0-in.	★
130	13.0-in.	15.0-in.	0.5-in.	★
135	13.5-in.	15.0-in.	0.0-in.	★
140	14.0-in.	18.0-in.	2.5-in.	★
145	14.5-in.	18.0-in.	2.0-in.	★
150	15.0-in.	18.0-in.	1.5-in.	★
155	15.5-in.	18.0-in.	1.0-in.	★
160	16.0-in.	18.0-in.	0.5-in.	★
165	16.5-in.	18.0-in.	0.0-in.	★

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
170	17.0-in.	21.0-in.	2.5-in.	★
175	17.5-in.	21.0-in.	2.0-in.	★
180	18.0-in.	21.0-in.	1.5-in.	★
185	18.5-in.	21.0-in.	1.0-in.	★
190	19.0-in.	21.0-in.	0.5-in.	★
195	19.5-in.	21.0-in.	0.0-in.	★
200	20.0-in.	24.0-in.	2.5-in.	★
205	20.5-in.	24.0-in.	2.0-in.	★
210	21.0-in.	24.0-in.	1.5-in.	★
215	21.5-in.	24.0-in.	1.0-in.	★
220	22.0-in.	24.0-in.	0.5-in.	★
225	22.5-in.	24.0-in.	0.0-in.	★
230	23.0-in.	27.0-in.	2.5-in.	★
240	24.0-in.	27.0-in.	1.5-in.	★
250	25.0-in.	27.0-in.	0.5-in.	★
260	26.0-in.	30.0-in.	2.5-in.	★
270	27.0-in.	30.0-in.	1.5-in.	★
280	28.0-in.	30.0-in.	0.5-in.	★
290	29.0-in.	33.0-in.	2.5-in.	★
300	30.0-in.	33.0-in.	1.5-in.	★
310	31.0-in.	33.0-in.	0.5-in.	★
320	32.0-in.	36.0-in.	2.5-in.	★
330	33.0-in.	36.0-in.	1.5-in.	★
340	34.0-in.	36.0-in.	0.5-in.	★
350	35.0-in.	39.0-in.	2.5-in.	★
360	36.0-in.	39.0-in.	1.5-in.	★
370	37.0-in.	39.0-in.	0.5-in.	★
380	38.0-in.	42.0-in.	2.5-in.	★
390	39.0-in.	42.0-in.	1.5-in.	★
400	40.0-in.	42.0-in.	0.5-in.	★
410	41.0-in.	45.0-in.	2.5-in.	★
420	42.0-in.	45.0-in.	1.5-in.	★
430	43.0-in.	45.0-in.	0.5-in.	★
440	44.0-in.	48.0-in.	2.5-in.	★
450	45.0-in.	48.0-in.	1.5-in.	★
460	46.0-in.	48.0-in.	0.5-in.	★

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
470	47.0-in.	51.0-in.	2.5-in.	★

- (1) Thermowells with an overall length ("U" + "T" + 1.75-in.) of 36-in. or less are machined from solid barstock. Thermowells with an overall length larger than 42-in. will be constructed using a welded 3-piece design and are available only with a stepped stem style. For lengths between 36-in. and 42-in. consult factory for construction method.
- (2) For additional Lagging (T) lengths, see [Thermowell lagging length \(T\)](#) section.
- (3) Available only with straight or tapered stem thermowells.

### Thermowell style, mounting, and stem

Code	Thermowell style	Mounting	Stem	
T20	Threaded	½–14 ANPT	Stepped	★
T22	Threaded	¾–14 ANPT	Stepped	★
T24	Threaded	1–11.5 ANPT	Stepped	★
T26	Threaded	¾–14 ANPT	Tapered	★
T28	Threaded	1–11.5 ANPT	Tapered	★
T30	Threaded	1½–11 ANPT	Tapered	★
T32	Threaded	½–14 ANPT	Straight	★
T34	Threaded	¾–14 ANPT	Straight	★
T36	Threaded	1–11.5 ANPT	Straight	★
T38	Threaded	¾–14 ANPT	Straight	★
T44	Threaded	½–14 ANPT	Tapered	★
W38	Welded	¾-in. pipe	Stepped	★
W40	Welded	1-in. pipe	Stepped	★
W42	Welded	¾-in. pipe	Tapered	★
W44	Welded	1-in. pipe	Tapered	★
W46	Welded	1¼-in. pipe	Tapered	★
W48	Welded	¾-in. pipe	Straight	★
W50	Welded	1-in. pipe	Straight	★
F10	Flanged	2-in., Class 150	Straight	★
F12	Flanged	3-in., Class 150	Straight	★
F52 <sup>(1)</sup>	Flanged	1-in., Class 150	Stepped	★
F54	Flanged	1½-in., Class 150	Stepped	★
F56	Flanged	2-in., Class 150	Stepped	★
F58 <sup>(2)</sup>	Flanged	1-in., Class 150	Tapered	★
F60	Flanged	1½-in., Class 150	Tapered	★
F62	Flanged	2-in. Class 150	Tapered	★
F64 <sup>(1)</sup>	Flanged	1-in., Class 150	Straight	★
F66	Flanged	1½-in., Class 150	Straight	★
F70 <sup>(1)</sup>	Flanged	1-in., Class 300	Stepped	★

Code	Thermowell style	Mounting	Stem	
F72	Flanged	1½-in., Class 300	Stepped	★
F74	Flanged	2-in., Class 300	Stepped	★
F76 <sup>(2)</sup>	Flanged	1-in., Class 300	Tapered	★
F78	Flanged	1½-in., Class 300	Tapered	★
F80	Flanged	2-in., Class 300	Tapered	★
F82 <sup>(1)</sup>	Flanged	1-in., Class 300	Straight	★
F84	Flanged	1½-in., Class 300	Straight	★
F86	Flanged	2-in., Class 300	Straight	★
F88 <sup>(1)</sup>	Flanged	1-in., Class 600	Stepped	★
F90 <sup>(3)</sup>	Flanged	1½-in., Class 600	Stepped	★
F92 <sup>(3)</sup>	Flanged	2-in., Class 600	Stepped	★
F94 <sup>(2)(3)</sup>	Flanged	1-in., Class 600	Tapered	★
F96 <sup>(3)</sup>	Flanged	1½-in., Class 600	Tapered	★
F98 <sup>(3)</sup>	Flanged	2-in., Class 600	Tapered	★
F02 <sup>(1)(3)</sup>	Flanged	1-in., Class 600	Straight	★
F04 <sup>(3)</sup>	Flanged	1½-in., Class 600	Straight	★
F06 <sup>(3)</sup>	Flanged	2-in., Class 600	Straight	★
F16 <sup>(3)</sup>	Flanged	1½-in., Class 900	Tapered	★
F34 <sup>(3)</sup>	Flanged	1½-in., Class 1500	Tapered	★
F24 <sup>(3)</sup>	Flanged	2-in., Class 1500	Tapered	★
F08 <sup>(4)</sup>	Flanged	1½-in., Class 2500	Tapered	★
Q02 <sup>(5)</sup>	Sanitary, Tri Clamp	1-in., Tri Clamp	Stepped	★
Q04 <sup>(5)</sup>	Sanitary, Tri Clamp	1½-in., Tri Clamp	Stepped	★
Q06 <sup>(5)</sup>	Sanitary, Tri Clamp	2-in., Tri Clamp	Stepped	★
Q08 <sup>(5)</sup>	Sanitary, Tri Clamp	3-in., Tri Clamp	Stepped	★
Q20 <sup>(5)</sup>	Sanitary, Tri Clamp	¾-in., Tri Clamp	Straight	★
Q22 <sup>(5)</sup>	Sanitary, Tri Clamp	1-in., Tri Clamp	Straight	★
Q24 <sup>(5)</sup>	Sanitary, Tri Clamp	1½-in., Tri Clamp	Straight	★
Q26 <sup>(5)</sup>	Sanitary, Tri Clamp	2-in., Tri Clamp	Straight	★
Q28 <sup>(5)</sup>	Sanitary, Tri Clamp	3-in., Tri Clamp	Straight	★

(1) F52, F64, F70, F88, and F02 are not compatible with 1-in. Sch. XXs pipe.

(2) F58, F76, and F94 may not be compatible with 1-in. Sch. pipe and are not compatible with 1-in. Sch. 80, 160 or XXS pipe.

(3) These options cannot be used with 0-in. (T) length.

(4) F08 cannot be used with 0- or ½-in. (T) length.

(5) Limited to 24-in. immersion length and 316 or 304 SST materials only.

## Additional options

### Approval options

Code	Description	
E1	ATEX Flameproof approval	★
E2	Ex d- CEPEL Flameproof approval- Brazil	★
E5	FM Explosion-proof approval	★
E6	CSA Explosion-proof approval	★
E7	IECEX Flameproof approval	★
EM	Technical Regulations Customs Union (EAC) Flameproof	★
KD	Combination of FM Explosion-proof, CSA Explosion-proof, and ATEX Flameproof approval	★
KF	Combination of ATEX Flameproof and CSA Explosion-proof approval	★

### Calibration schedule

Code	Description	
X8	Customer-specified temperature range calibration	★
X9	Customer-specified single temperature point calibration	★

### Calibration certification

Code	Description	
Q4	Calibration certification, customer-specified temperature	★

### A Leadkit

Code	Description	
A1–A8	Twisted lead wire extension: A1 = 1.5 ft., A2 = 3.0 ft., A3 = 6.0 ft., A4 = 12 ft., A5 = 24 ft., A6 = 50 ft., A7 = 75 ft., A8 = 100 ft.	★

### B Leadkit

Code	Description	
B1–B8	Shielded cable lead wire extension: B1 = 1.5 ft., B2 = 3.0 ft., B3 = 6.0 ft., B4 = 12 ft., B5 = 24 ft., B6 = 50 ft., B7 = 75 ft., B8 = 100 ft.	★

### C Leadkit

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
C1–C8	Armored cable lead wire extension: C1 = 1.5 ft., C2 = 3.0 ft., C3 = 6.0 ft., C4 = 12 ft., C5 = 24 ft., C6 = 50 ft., C7 = 75 ft., C8 = 100 ft.	★

**D Leadkit**

These options are only available with sensor lead wire termination code N.

Code	Description	
D1–D8	Armored cable lead wire extensions with electrical plug: D1 = 1.5 ft., D2 = 3.0 ft., D3 = 6.0 ft., D4 = 12 ft., D5 = 24 ft., D6 = 50 ft., D7 = 75 ft., D8 = 100 ft.	★
L1–L8	Armored cable mating plugs with lead wire extension: L1 = 1.5 ft., L2 = 3.0 ft., L3 = 6.0 ft., L4 = 12 ft., L5 = 24 ft., L6 = 50 ft., L7 = 75 ft., L8 = 100 ft.	★

**J Leadkit**

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
J1	Moisture-proof seal assembly for armored cables	★

**Special external pressure test**

Code	Description	
R01	Special external pressure test	★

**Material certification**

Code	Description	
Q8	Material certification	★

**Surface finish certification**

Code	Description	
Q16	Surface finish certification	★

**Dye penetration test**

Code	Description	
R03	Dye penetration test	★

**NACE approval**

Code	Description	
R05	NACE approval	★

**SST plug and chain**

Code	Description	
R06	Stainless steel plug and chain	★

**Full penetration weld**

Available on flanged thermowells only.

Code	Description	
R07	Full penetration weld	★

**Flange face options**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R09	Concentric serrations of thermowell flange face	★

**Flat-faced flange**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R10	Flat-faced flange	★

**Vent hole**

Code	Description	
R11	Vent hole	★

**Thermowell X-ray**

Code	Description	
R12	Thermowell X-ray	★

**Special surface finish**

Code	Description	
R14	Special surface finish (12 Ra) (maximum "U" length = 22.5-in.)	★

**Ring joint flange**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R16	Ring joint flange (not available with 0-in. [T] length)	★

**Electropolish**

Not available on flanged thermowells and L lengths longer than 24-in.

Code	Description	
R20	Electropolish	★

**Wake frequency**

Code	Description	
R21	Wake frequency-thermowell strength calculation	★

**Internal pressure test**

Code	Description	
R22	Internal pressure test	★

**Brass plug and chain**

Code	Description	
R23	Brass plug and chain	★

**Canadian registration number**

Code	Description	
R24	CRN Marking for British Columbia	
R25	CRN Marking for Alberta	
R26	CRN Marking for Saskatchewan	
R27	CRN Marking for Manitoba	
R28	CRN Marking for Ontario	
R29	CRN Marking for Quebec	
R30	CRN Marking for New Brunswick	
R31	CRN Marking for Nova Scotia	
R32	CRN Marking for Prince Edward Island	
R33	CRN Marking for Yukon Territory	
R34	CRN Marking for Northwest Territory	
R35	CRN Marking for Nunavut	
R36	CRN Marking for Newfoundland and Labrador	

**Thermowell from hex stock**

Code	Description	
R37	Thermowell from hex stock	★

**Assemble to options**

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount 78 Sensor and Thermowell



The Rosemount 78 Sensor and Thermowell have designs that provide flexible and reliable temperature measurements in process environments.

Features include:

- Industry-standard Pt-100 RTD
- Single-element high-temperature RTD or dual- element RTD
- Variety of enclosure and connection head options
- Global hazardous-location approvals (option codes E5, E6, E7)
- Calibration services to give you insight to sensor performance (option codes V1–V8, X8, X9)
- Calibration certification documentation to accompany sensor (option code Q4)
- Assemble to transmitter option (option code XA)

[VIEW PRODUCT >](#)

### Online Product Configurator

Many products are configurable online using our Product Configurator. Select the **Configure** button or visit our [website](#) to start. With this tool's built-in logic and continuous validation, you can configure your products more quickly and accurately.

### Model codes

Model codes contain the details related to each product. Exact model codes will vary; an example of a typical model code is shown in [Figure 1](#).

**Figure 2: Model Code Example**

<b>3144P D1 A 1 NA</b>	<b>M5 DA1 Q4</b>
<b>1</b>	<b>2</b>

1. Required model components (choices available on most)
2. Additional options (variety of features and functions that may be added to products)

### Specifications and options

See the Specifications and options section for more details on each configuration. Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See the Material selection section for more information.

## Rosemount Series 78 RTD Sensor Assemblies without Thermowell

### Required model components

#### Model

Code	Description	
0078	Platinum temperature sensor without thermowell	★

#### Connection head

Code	Description	
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
D	Rosemount aluminum connection head with ½-in. entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

#### Sensor type

Single-element temperature sensors (–200 to 500 °C [–328 to 932 °F])

Code	Description	
01 <sup>(1)(2)</sup>	Capsule style	★
11 <sup>(3)</sup>	General-purpose style	★
21	Spring-loaded style	★
31 <sup>(4)</sup>	Bayonet spring-loaded style (available in [X] lengths of 1- to 21-in, increments of 1-in.)	

(1) Capsule style available in 1-in. increments only, starting at 1-in.

(2) This option can only be used with sensor lead wire termination code N and is not available with assembly option XA or with approval options.

(3) General-purpose sensors are available in (L) lengths of 2.5-in. or greater.

(4) Not available with sensor lead wire termination codes R, P, or C or Approval Options.

#### Sensor type

Dual-element temperature sensors (–200 to 500 °C [–328 to 932 °F])

Code	Description	
05 <sup>(1)</sup>	Capsule style	★
15 <sup>(2)</sup>	General-purpose style	★
25	Spring-loaded style	★
35 <sup>(3)</sup>	Bayonet spring-loaded style (available in [X] lengths of 1- to 21-in., increments of 1-in.)	

(1) This option can only be used with sensor lead wire termination code N and is not available with assembly option XA or with approval options.

(2) General-purpose sensors are available in (L) lengths of 2.5-in. or greater.

(3) Not available with sensor lead wire termination codes R, P, or C or Approval Options.

**Extension type and material**

Code	Extension type	Material	
A <sup>(1)</sup>	Nipple coupling	300 series SST	★
C <sup>(1)</sup>	Nipple union	300 series SST	★
N	None (use with extension length option code 00)	None	

(1) Codes A and C must be used with an Extension Length.

**Extension length (E)**

Code	Description	
00	00-in.	★
30	3.0-in.	★
60	6.0-in.	★

**Thermowell material**

Code	Description	
N	No thermowell required	★

**Sensor immersion length (L)**

Code	Description	
010 <sup>(1)</sup>	1.0-in.	★
015	1.5-in.	★
020	2.0-in.	★
025	2.5-in.	★
030	3.0-in.	★
035	3.5-in.	★
040	4.0-in.	★
045	4.5-in.	★
050	5.0-in.	★
055	5.5-in.	★
060	6.0-in.	★
065	6.5-in.	★
070	7.0-in.	★
075	7.5-in.	★
080	8.0-in.	★
085	8.5-in.	★
090	9.0-in.	★
095	9.5-in.	★
100	10.0-in.	★

Code	Description	
105	10.5-in.	★
110	11.0-in.	★
115	11.5-in.	★
120	12.0-in.	★
125	12.5-in.	★
130	13.0-in.	★
135	13.5-in.	★
140	14.0-in.	★
145	14.5-in.	★
150	15.0-in.	★
155	15.5-in.	★
160	16.0-in.	★
165	16.5-in.	★
170	17.0-in.	★
175	17.5-in.	★
180	18.0-in.	★
185	18.5-in.	★
190	19.0-in.	★
195	19.5-in.	★
200	20.0-in.	★
205	20.5-in.	★
210	21.0-in.	★
215	21.5-in.	★
220	22.0-in.	★
225	22.5-in.	★
230	23.0-in.	★
235	23.5-in.	★
240	24.0-in.	★
245	24.5-in.	★
250	25.0-in.	★
260	26.0-in.	★
270	27.0-in.	★
280	28.0-in.	★
290	29.0-in.	★
300	30.0-in.	★
310	31.0-in.	★

Code	Description	
320	32.0-in.	★
330	33.0-in.	★
340	34.0-in.	★
350	35.0-in.	★
360	36.0-in.	★
370	37.0-in.	★
380	38.0-in.	★
390	39.0-in.	★
400	40.0-in.	★
410	41.0-in.	★
420	42.0-in.	★
430	43.0-in.	★
440	44.0-in.	★
450	45.0-in.	★
460	46.0-in.	★
470	47.0-in.	★
480	48.0-in.	★

(1) 1-in. length without extension is only available in capsule style.

## Additional options

### Sensor

Code	Description	
A	IEC 751 Class A Sensor (–200 to 500 °C)	

### Approval options

Code	Description	
E1	ATEX Flameproof approval	★
E2	Ex d- CEPEL Flameproof approval- Brazil	★
E5	FM Explosion-proof approval	★
E6	CSA Explosion-proof approval	★
E7	IECEx Flameproof approval	★
EM	Technical Regulations Customs Union (EAC) Flameproof	★
KD	Combination of FM Explosion-proof, CSA Explosion-proof, and ATEX Flameproof approval	★
KF	Combination of ATEX Flameproof and CSA Explosion-proof approval	★

**Callendar-Van Dusen constant**

Code	Description	
V1–V7	Callendar-Van Dusen constant	★

**Calibration schedule**

Code	Description	
X8	Customer-specified temperature range calibration	★
X9	Customer-specified single temperature point calibration	★

**Calibration certification**

Code	Description	
Q4	Calibration certification, customer-specified temperature	★

**Mounting adapters**

Code	Description	
M5–M7	Mounting adapter: Sensor compression fitting: 1/8–27 NPT, M6 = 1/4–18 NPT, M7 = 1/2–14 NPT	★

**A Leadkit**

Code	Description	
A1–A8	Twisted lead wire extension: A1 = 1.5 ft., A2 = 3.0 ft., A3 = 6.0 ft., A4 = 12 ft., A5 = 24 ft., A6 = 50 ft., A7 = 75 ft., A8 = 100 ft.	★

**B Leadkit**

Code	Description	
B1–B8	Shielded cable lead wire extension: B1 = 1.5 ft., B2 = 3.0 ft., B3 = 6.0 ft., B4 = 12 ft., B5 = 24 ft., B6 = 50 ft., B7 = 75 ft., B8 = 100 ft.	★

**C Leadkit**

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
C1–C8	Armored cable lead wire extension: C1 = 1.5 ft., C2 = 3.0 ft., C3 = 6.0 ft., C4 = 12 ft., C5 = 24 ft., C6 = 50 ft., C7 = 75 ft., C8 = 100 ft.	★

**D Leadkit**

These options are only available with sensor lead wire termination code N.

Code	Description	
D1–D8	Armored cable lead wire extensions with electrical plug: D1 = 1.5 ft., D2 = 3.0 ft., D3 = 6.0 ft., D4 = 12 ft., D5 = 24 ft., D6 = 50 ft., D7 = 75 ft., D8 = 100 ft.	★

Code	Description	
L1-L8	Armored cable mating plugs with lead wire extension: L1 = 1.5 ft., L2 = 3.0 ft., L3 = 6.0 ft., L4 = 12 ft., L5 = 24 ft., L6 = 50 ft., L7 = 75 ft., L8 = 100 ft.	★

### J Leadkit

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
J1	Moisture-proof seal assembly for armored cables	★

### Assemble to options

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount Series 78 RTD Sensor Assemblies with Thermowell

### Required model components

#### Model

Code	Description	
0078	Platinum temperature sensor without thermowell	★

#### Connection head

Code	Description	
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
D	Rosemount aluminum connection head with ½-in. entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

#### Sensor type

Single-element temperature sensors (-200 to 500 °C [-328 to 932 °F])

Code	Description	
01 <sup>(1)(2)</sup>	Capsule style	★
11 <sup>(3)</sup>	General-purpose style	★

Code	Description	
21	Spring-loaded style	★
31 <sup>(4)</sup>	Bayonet spring-loaded style (available in [X] lengths of 1- to 21-in, increments of 1-in.)	

- (1) Capsule style available in 1-in. increments only, starting at 1-in.  
 (2) This option can only be used with sensor lead wire termination code N and is not available with assembly option XA or with approval options.  
 (3) General-purpose sensors are available in (L) lengths of 2.5-in. or greater.  
 (4) Not available with sensor lead wire termination codes R, P, or C or Approval Options.

### Sensor type

Dual-element temperature sensors (–200 to 500 °C [–328 to 932 °F])

Code	Description	
05 <sup>(1)</sup>	Capsule style	★
15 <sup>(2)</sup>	General-purpose style	★
25	Spring-loaded style	★
35 <sup>(3)</sup>	Bayonet spring-loaded style (available in [X] lengths of 1- to 21-in., increments of 1-in.)	

- (1) This option can only be used with sensor lead wire termination code N and is not available with assembly option XA or with approval options.  
 (2) General-purpose sensors are available in (L) lengths of 2.5-in. or greater.  
 (3) Not available with sensor lead wire termination codes R, P, or C or Approval Options.

### Extension type and material

Code	Extension type	Material	
A <sup>(1)</sup>	Nipple coupling	300 series SST	★
C <sup>(1)</sup>	Nipple union	300 series SST	★
N	None (use with extension length option code 00)	None	

- (1) Codes A and C must be used with an Extension Length.

### Thermowell material

Code	Description	
A	316 SST	★
B	304 SST	★
C	Carbon steel	★
D	316L SST	★
E	304L SST	★
F	Alloy 20	
G	Alloy 400	
H	Alloy 600	
J	Alloy C-276	
L	Alloy B	
M	304 SST with PTFE coating	
P	Chrome Molybdenum Grade F22	
R	Nickel 200	

Code	Description	
T	Titanium	
U <sup>(1)</sup>	316 SST with tantalum sheath	
V	310 SST	
W	321 SST	
Z	Chrome Molybdenum Grade F11	

(1) Available only with straight stem flanged thermowells.

#### Immersion (U), Thermowell (L), and Lagging (T) Length

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
015 <sup>(3)</sup>	1.5-in.	4.0-in.	1.0-in.	★
020 <sup>(3)</sup>	2.0-in.	4.0-in.	0.5-in.	★
025 <sup>(3)</sup>	2.5-in.	4.0-in.	0.0-in.	★
030	3.0-in.	6.0-in.	1.5-in.	★
035	3.5-in.	6.0-in.	1.0-in.	★
040	4.0-in.	6.0-in.	0.5-in.	★
045	4.5-in.	6.0-in.	0.0-in.	★
050	5.0-in.	9.0-in.	2.5-in.	★
055	5.5-in.	9.0-in.	2.0-in.	★
060	6.0-in.	9.0-in.	1.5-in.	★
065	6.5-in.	9.0-in.	1.0-in.	★
070	7.0-in.	9.0-in.	0.5-in.	★
075	7.5-in.	9.0-in.	0.0-in.	★
080	8.0-in.	12.0-in.	2.5-in.	★
085	8.5-in.	12.0-in.	2.0-in.	★
090	9.0-in.	12.0-in.	1.5-in.	★
095	9.5-in.	12.0-in.	1.0-in.	★
100	10.0-in.	12.0-in.	0.5-in.	★
105	10.5-in.	12.0-in.	0.0-in.	★
110	11.0-in.	15.0-in.	2.5-in.	★
115	11.5-in.	15.0-in.	2.0-in.	★
120	12.0-in.	15.0-in.	1.5-in.	★
125	12.5-in.	15.0-in.	1.0-in.	★
130	13.0-in.	15.0-in.	0.5-in.	★
135	13.5-in.	15.0-in.	0.0-in.	★
140	14.0-in.	18.0-in.	2.5-in.	★
145	14.5-in.	18.0-in.	2.0-in.	★

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
150	15.0-in.	18.0-in.	1.5-in.	★
155	15.5-in.	18.0-in.	1.0-in.	★
160	16.0-in.	18.0-in.	0.5-in.	★
165	16.5-in.	18.0-in.	0.0-in.	★
170	17.0-in.	21.0-in.	2.5-in.	★
175	17.5-in.	21.0-in.	2.0-in.	★
180	18.0-in.	21.0-in.	1.5-in.	★
185	18.5-in.	21.0-in.	1.0-in.	★
190	19.0-in.	21.0-in.	0.5-in.	★
195	19.5-in.	21.0-in.	0.0-in.	★
200	20.0-in.	24.0-in.	2.5-in.	★
205	20.5-in.	24.0-in.	2.0-in.	★
210	21.0-in.	24.0-in.	1.5-in.	★
215	21.5-in.	24.0-in.	1.0-in.	★
220	22.0-in.	24.0-in.	0.5-in.	★
225	22.5-in.	24.0-in.	0.0-in.	★
230	23.0-in.	27.0-in.	2.5-in.	★
240	24.0-in.	27.0-in.	1.5-in.	★
250	25.0-in.	27.0-in.	0.5-in.	★
260	26.0-in.	30.0-in.	2.5-in.	★
270	27.0-in.	30.0-in.	1.5-in.	★
280	28.0-in.	30.0-in.	0.5-in.	★
290	29.0-in.	33.0-in.	2.5-in.	★
300	30.0-in.	33.0-in.	1.5-in.	★
310	31.0-in.	33.0-in.	0.5-in.	★
320	32.0-in.	36.0-in.	2.5-in.	★
330	33.0-in.	36.0-in.	1.5-in.	★
340	34.0-in.	36.0-in.	0.5-in.	★
350	35.0-in.	39.0-in.	2.5-in.	★
360	36.0-in.	39.0-in.	1.5-in.	★
370	37.0-in.	39.0-in.	0.5-in.	★
380	38.0-in.	42.0-in.	2.5-in.	★
390	39.0-in.	42.0-in.	1.5-in.	★
400	40.0-in.	42.0-in.	0.5-in.	★
410	41.0-in.	45.0-in.	2.5-in.	★
420	42.0-in.	45.0-in.	1.5-in.	★

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
430	43.0-in.	45.0-in.	0.5-in.	★
440	44.0-in.	48.0-in.	2.5-in.	★
450	45.0-in.	48.0-in.	1.5-in.	★
460	46.0-in.	48.0-in.	0.5-in.	★
470	47.0-in.	51.0-in.	2.5-in.	★

(1) Thermowells with an overall length (“U” + “T” + 1.75-in.) of 36-in. or less are machined from solid barstock. Thermowells with an overall length larger than 42-in. will be constructed using a welded 3-piece design and are available only with a stepped stem style. For lengths between 36-in. and 42-in. consult factory for construction method.

(2) For additional Lagging (T) lengths, see [Thermowell lagging length \(T\)](#) section.

(3) Available only with straight or tapered stem thermowells.

### Thermowell style, mounting, and stem

Code	Thermowell style	Mounting	Stem	
T20	Threaded	½–14 ANPT	Stepped	★
T22	Threaded	¾–14 ANPT	Stepped	★
T24	Threaded	1–11.5 ANPT	Stepped	★
T26	Threaded	¾–14 ANPT	Tapered	★
T28	Threaded	1–11.5 ANPT	Tapered	★
T30	Threaded	1½–11 ANPT	Tapered	★
T32	Threaded	½–14 ANPT	Straight	★
T34	Threaded	¾–14 ANPT	Straight	★
T36	Threaded	1–11.5 ANPT	Straight	★
T38	Threaded	¾–14 ANPT	Straight	★
T44	Threaded	½–14 ANPT	Tapered	★
W38	Welded	¾-in. pipe	Stepped	★
W40	Welded	1-in. pipe	Stepped	★
W42	Welded	¾-in. pipe	Tapered	★
W44	Welded	1-in. pipe	Tapered	★
W46	Welded	1¼-in. pipe	Tapered	★
W48	Welded	¾-in. pipe	Straight	★
W50	Welded	1-in. pipe	Straight	★
F10	Flanged	2-in., Class 150	Straight	★
F12	Flanged	3-in., Class 150	Straight	★
F52 <sup>(1)</sup>	Flanged	1-in., Class 150	Stepped	★
F54	Flanged	1½-in., Class 150	Stepped	★
F56	Flanged	2-in., Class 150	Stepped	★
F58 <sup>(2)</sup>	Flanged	1-in., Class 150	Tapered	★
F60	Flanged	1½-in., Class 150	Tapered	★

Code	Thermowell style	Mounting	Stem	
F62	Flanged	2-in. Class 150	Tapered	★
F64 <sup>(1)</sup>	Flanged	1-in., Class 150	Straight	★
F66	Flanged	1½-in., Class 150	Straight	★
F70 <sup>(1)</sup>	Flanged	1-in., Class 300	Stepped	★
F72	Flanged	1½-in., Class 300	Stepped	★
F74	Flanged	2-in., Class 300	Stepped	★
F76 <sup>(2)</sup>	Flanged	1-in., Class 300	Tapered	★
F78	Flanged	1½-in., Class 300	Tapered	★
F80	Flanged	2-in., Class 300	Tapered	★
F82 <sup>(1)</sup>	Flanged	1-in., Class 300	Straight	★
F84	Flanged	1½-in., Class 300	Straight	★
F86	Flanged	2-in., Class 300	Straight	★
F88 <sup>(1)</sup>	Flanged	1-in., Class 600	Stepped	★
F90 <sup>(3)</sup>	Flanged	1½-in., Class 600	Stepped	★
F92 <sup>(3)</sup>	Flanged	2-in., Class 600	Stepped	★
F94 <sup>(2)(3)</sup>	Flanged	1-in., Class 600	Tapered	★
F96 <sup>(3)</sup>	Flanged	1½-in., Class 600	Tapered	★
F98 <sup>(3)</sup>	Flanged	2-in., Class 600	Tapered	★
F02 <sup>(1)(3)</sup>	Flanged	1-in., Class 600	Straight	★
F04 <sup>(3)</sup>	Flanged	1½-in., Class 600	Straight	★
F06 <sup>(3)</sup>	Flanged	2-in., Class 600	Straight	★
F16 <sup>(3)</sup>	Flanged	1½-in., Class 900	Tapered	★
F34 <sup>(3)</sup>	Flanged	1½-in., Class 1500	Tapered	★
F24 <sup>(3)</sup>	Flanged	2-in., Class 1500	Tapered	★
F08 <sup>(4)</sup>	Flanged	1½-in., Class 2500	Tapered	★
Q02 <sup>(5)</sup>	Sanitary, Tri Clamp	1-in., Tri Clamp	Stepped	★
Q04 <sup>(5)</sup>	Sanitary, Tri Clamp	1½-in., Tri Clamp	Stepped	★
Q06 <sup>(5)</sup>	Sanitary, Tri Clamp	2-in., Tri Clamp	Stepped	★
Q08 <sup>(5)</sup>	Sanitary, Tri Clamp	3-in., Tri Clamp	Stepped	★
Q20 <sup>(5)</sup>	Sanitary, Tri Clamp	¾-in., Tri Clamp	Straight	★
Q22 <sup>(5)</sup>	Sanitary, Tri Clamp	1-in., Tri Clamp	Straight	★
Q24 <sup>(5)</sup>	Sanitary, Tri Clamp	1½-in., Tri Clamp	Straight	★
Q26 <sup>(5)</sup>	Sanitary, Tri Clamp	2-in., Tri Clamp	Straight	★
Q28 <sup>(5)</sup>	Sanitary, Tri Clamp	3-in., Tri Clamp	Straight	★

(1) F52, F64, F70, F88, and F02 are not compatible with 1-in. Sch. XXs pipe.

(2) F58, F76, and F94 may not be compatible with 1-in. Sch. pipe and are not compatible with 1-in. Sch. 80, 160 or XXS pipe.

(3) These options cannot be used with 0-in. (T) length.

- (4) F08 cannot be used with 0- or ½-in. (T) length.  
 (5) Limited to 24-in. immersion length and 316 or 304 SST materials only.

## Additional options

### Sensor

Code	Description	
A	IEC 751 Class A Sensor (–200 to 500 °C)	

### Approval options

Code	Description	
E1	ATEX Flameproof approval	★
E2	Ex d- CEPEL Flameproof approval- Brazil	★
E5	FM Explosion-proof approval	★
E6	CSA Explosion-proof approval	★
E7	IECEX Flameproof approval	★
EM	Technical Regulations Customs Union (EAC) Flameproof	★
KD	Combination of FM Explosion-proof, CSA Explosion-proof, and ATEX Flameproof approval	★
KF	Combination of ATEX Flameproof and CSA Explosion-proof approval	★

### Callendar-Van Dusen constant

Code	Description	
V1–V7	Callendar-Van Dusen constant	★

### Calibration schedule

Code	Description	
X8	Customer-specified temperature range calibration	★
X9	Customer-specified single temperature point calibration	★

### Calibration certification

Code	Description	
Q4	Calibration certification, customer-specified temperature	★

### Mounting adapters

Code	Description	
M5–M7	Mounting adapter: Sensor compression fitting: ⅛–27 NPT, M6 = ¼–18 NPT, M7 = ½–14 NPT	★

**A Leadkit**

Code	Description	
A1–A8	Twisted lead wire extension: A1 = 1.5 ft., A2 = 3.0 ft., A3 = 6.0 ft., A4 = 12 ft., A5 = 24 ft., A6 = 50 ft., A7 = 75 ft., A8 = 100 ft.	★

**B Leadkit**

Code	Description	
B1–B8	Shielded cable lead wire extension: B1 = 1.5 ft., B2 = 3.0 ft., B3 = 6.0 ft., B4 = 12 ft., B5 = 24 ft., B6 = 50 ft., B7 = 75 ft., B8 = 100 ft.	★

**C Leadkit**

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
C1–C8	Armored cable lead wire extension: C1 = 1.5 ft., C2 = 3.0 ft., C3 = 6.0 ft., C4 = 12 ft., C5 = 24 ft., C6 = 50 ft., C7 = 75 ft., C8 = 100 ft.	★

**D Leadkit**

These options are only available with sensor lead wire termination code N.

Code	Description	
D1–D8	Armored cable lead wire extensions with electrical plug: D1 = 1.5 ft., D2 = 3.0 ft., D3 = 6.0 ft., D4 = 12 ft., D5 = 24 ft., D6 = 50 ft., D7 = 75 ft., D8 = 100 ft.	★
L1–L8	Armored cable mating plugs with lead wire extension: L1 = 1.5 ft., L2 = 3.0 ft., L3 = 6.0 ft., L4 = 12 ft., L5 = 24 ft., L6 = 50 ft., L7 = 75 ft., L8 = 100 ft.	★

**J Leadkit**

These options are only available with sensor lead wire termination codes T, L, or N.

Code	Description	
J1	Moisture-proof seal assembly for armored cables	★

**Special external pressure test**

Code	Description	
R01	Special external pressure test	★

**Material certification**

Code	Description	
Q8	Material certification	★

**Surface finish certification**

Code	Description	
Q16	Surface finish certification	★

**Dye penetration test**

Code	Description	
R03	Dye penetration test	★

**NACE approval**

Code	Description	
R05	NACE approval	★

**SST plug and chain**

Code	Description	
R06	Stainless steel plug and chain	★

**Full penetration weld**

Available on flanged thermowells only.

Code	Description	
R07	Full penetration weld	★

**Flange face options**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R09	Concentric serrations of thermowell flange face	★

**Flat-faced flange**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R10	Flat-faced flange	★

**Vent hole**

Code	Description	
R11	Vent hole	★

**Thermowell X-ray**

Code	Description	
R12	Thermowell X-ray	★

**Special surface finish**

Code	Description	
R14	Special surface finish (12 Ra) (maximum "U" length = 22.5-in.)	★

**Ring joint flange**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R16	Ring joint flange (not available with 0-in. [T] length)	★

**Electropolish**

Not available on flanged thermowells and L lengths longer than 24-in.

Code	Description	
R20	Electropolish	★

**Wake frequency**

Code	Description	
R21	Wake frequency-thermowell strength calculation	★

**Internal pressure test**

Code	Description	
R22	Internal pressure test	★

**Brass plug and chain**

Code	Description	
R23	Brass plug and chain	★

**Canadian registration number**

Code	Description	
R24	CRN Marking for British Columbia	
R25	CRN Marking for Alberta	
R26	CRN Marking for Saskatchewan	
R27	CRN Marking for Manitoba	
R28	CRN Marking for Ontario	

Code	Description	
R29	CRN Marking for Quebec	
R30	CRN Marking for New Brunswick	
R31	CRN Marking for Nova Scotia	
R32	CRN Marking for Prince Edward Island	
R33	CRN Marking for Yukon Territory	
R34	CRN Marking for Northwest Territory	
R35	CRN Marking for Nunavut	
R36	CRN Marking for Newfoundland and Labrador	

#### Thermowell from hex stock

Code	Description	
R37	Thermowell from hex stock	★

#### Assemble to options

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount 183 Sensor and Thermowell



The Rosemount 183 Sensor and Thermowell have designs that provide flexible and reliable temperature measurements in process environments.

Features include:

- Industry-standard sensor types, including J, K, E, and T thermocouple varieties
- Variety of enclosure and connection head options
- Global hazardous-location approvals (Option Codes E5, E6, E7)
- Assemble to Transmitter option (Option Code XA)

[VIEW PRODUCT >](#)

### Online Product Configurator

Many products are configurable online using our Product Configurator. Select the **Configure** button or visit our [website](#) to start. With this tool's built-in logic and continuous validation, you can configure your products more quickly and accurately.

### Model codes

Model codes contain the details related to each product. Exact model codes will vary; an example of a typical model code is shown in [Figure 1](#).

**Figure 3: Model Code Example**

<b>3144P D1 A 1 NA</b>	<b>M5 DA1 Q4</b>
<b>1</b>	<b>2</b>

1. Required model components (choices available on most)
2. Additional options (variety of features and functions that may be added to products)

### Specifications and options

See the Specifications and options section for more details on each configuration. Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See the Material selection section for more information.

## Rosemount Series 183 Thermocouple Sensor Assemblies without Thermowell

### Required model components

#### Model

Code	Description	
0183	Thermocouple sensor	★

#### Connection head

Code	Description	
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
D	Rosemount aluminum connection head with ½-in. entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

#### Sensor type and junction for Capsule sensors

Not available with sensor lead wire termination codes R, P, or C or with approval options.

Codes A and C must be used with an extension length. Additional non-standard (E) lengths are available in ½-in. increments from 2.5- to 9-in.

Code	Sensor type	Junction	
01	Single	Grounded	★
02	Dual	Grounded	★
03	Single	Ungrounded	★
04	Dual, unisolated	Ungrounded	★
05	Dual, isolated	Ungrounded	★

#### Sensor type and junction for General purpose sensor

Available only with straight stem flanged thermowells.

Code	Sensor type	Junction	
11	Single	Grounded	★
12	Dual	Grounded	★
13	Single	Ungrounded	★
14	Dual, unisolated	Ungrounded	★
15	Dual, isolated	Ungrounded	★

**Sensor type and junction for Spring-loaded sensor**

Code	Sensor type	Junction	
21	Single	Grounded	★
22	Dual	Grounded	★
23	Single	Ungrounded	★
24	Dual, unisolated	Ungrounded	★
25	Dual, isolated	Ungrounded	★

**Sensor type and junction for Bayonet spring-loaded sensor**

Thermowells with an overall length (“U” + “T” + 1.75-in.) of 36-in. or less are machined from solid barstock. Thermowells with an overall length larger than 42-in. will be constructed using a welded 3-piece design and are available only with a stepped stem style. For lengths between 36 and 42-in. consult factory for construction method.

Code	Sensor type	Junction	
31	Single	Grounded	
32	Dual	Grounded	
33	Single	Ungrounded	
34	Dual, unisolated	Ungrounded	
35	Dual, isolated	Ungrounded	

**Thermocouple type and temperature range**

Code	Description		
J2	J	0 to 760 °C (32 to 1400 °F)	★
K2	K	0 to 1150 °C (32 to 2102 °F)	★
E2	E	0 to 871 °C (32 to 1600 °F)	★
T2	T	-180 to 371 °C (-292 to 700 °F)	★

**Extension type and material**

Code	Extension type	Material	
A <sup>(1)</sup>	Nipple coupling	300 series SST	★
C <sup>(1)</sup>	Nipple union	300 series SST	★
N	None (use with extension length option code 00)	None	

(1) Codes A and C must be used with an Extension Length.

**Extension length (E)**

Code	Description	
00	00-in.	★
30	3.0-in.	★
60	6.0-in.	★

**Thermowell material**

Code	Description	
N	No thermowell required	★

**Sensor immersion length (L)**

Code	Description	
010 <sup>(1)</sup>	1.0-in.	★
015	1.5-in.	★
020	2.0-in.	★
025	2.5-in.	★
030	3.0-in.	★
035	3.5-in.	★
040	4.0-in.	★
045	4.5-in.	★
050	5.0-in.	★
055	5.5-in.	★
060	6.0-in.	★
065	6.5-in.	★
070	7.0-in.	★
075	7.5-in.	★
080	8.0-in.	★
085	8.5-in.	★
090	9.0-in.	★
095	9.5-in.	★
100	10.0-in.	★
105	10.5-in.	★
110	11.0-in.	★
115	11.5-in.	★
120	12.0-in.	★
125	12.5-in.	★
130	13.0-in.	★
135	13.5-in.	★
140	14.0-in.	★
145	14.5-in.	★
150	15.0-in.	★
155	15.5-in.	★
160	16.0-in.	★

Code	Description	
165	16.5-in.	★
170	17.0-in.	★
175	17.5-in.	★
180	18.0-in.	★
185	18.5-in.	★
190	19.0-in.	★
195	19.5-in.	★
200	20.0-in.	★
205	20.5-in.	★
210	21.0-in.	★
215	21.5-in.	★
220	22.0-in.	★
225	22.5-in.	★
230	23.0-in.	★
235	23.5-in.	★
240	24.0-in.	★
245	24.5-in.	★
250	25.0-in.	★
260	26.0-in.	★
270	27.0-in.	★
280	28.0-in.	★
290	29.0-in.	★
300	30.0-in.	★
310	31.0-in.	★
320	32.0-in.	★
330	33.0-in.	★
340	34.0-in.	★
350	35.0-in.	★
360	36.0-in.	★
370	37.0-in.	★
380	38.0-in.	★
390	39.0-in.	★
400	40.0-in.	★
410	41.0-in.	★
420	42.0-in.	★
430	43.0-in.	★

Code	Description	
440	44.0-in.	★
450	45.0-in.	★
460	46.0-in.	★
470	47.0-in.	★
480	48.0-in.	★

(1) 1-in. length without extension is only available in capsule style.

## Additional options

### Approval options

Code	Description	
E1	ATEX Flameproof approval	★
E2	Ex d- CEPEL Flameproof approval- Brazil	★
E5	FM Explosion-proof approval	★
E6	CSA Explosion-proof approval	★
E7	IECEx Flameproof approval	★
EM	Technical Regulations Customs Union (EAC) Flameproof	★
KD	Combination of FM Explosion-proof, CSA Explosion-proof, and ATEX Flameproof approval	★
KF	Combination of ATEX Flameproof and CSA Explosion-proof approval	★

### Mounting adapters

Code	Description	
M5–M7	Mounting adapter: Sensor compression fitting: 1/8–27 NPT, M6 = 1/4–18 NPT, M7 = 1/2–14 NPT	★

### Assemble to options

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount Series 183 Thermocouple Sensor Assemblies with Thermowell

### Required model components

#### Model

Code	Description	
0183	Thermocouple sensor	★

**Connection head**

Code	Description	
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
D	Rosemount aluminum connection head with ½-in. entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

**Sensor type and junction for Capsule sensors**

Not available with sensor lead wire termination codes R, P, or C or with approval options.

Codes A and C must be used with an extension length. Additional non-standard (E) lengths are available in ½-in. increments from 2.5- to 9-in.

Code	Sensor type	Junction	
01	Single	Grounded	★
02	Dual	Grounded	★
03	Single	Ungrounded	★
04	Dual, unisolated	Ungrounded	★
05	Dual, isolated	Ungrounded	★

**Sensor type and junction for General purpose sensor**

Available only with straight stem flanged thermowells.

Code	Sensor type	Junction	
11	Single	Grounded	★
12	Dual	Grounded	★
13	Single	Ungrounded	★
14	Dual, unisolated	Ungrounded	★
15	Dual, isolated	Ungrounded	★

**Sensor type and junction for Spring-loaded sensor**

Code	Sensor type	Junction	
21	Single	Grounded	★
22	Dual	Grounded	★
23	Single	Ungrounded	★
24	Dual, unisolated	Ungrounded	★

Code	Sensor type	Junction	
25	Dual, isolated	Ungrounded	★

#### Sensor type and junction for Bayonet spring-loaded sensor

Thermowells with an overall length (“U” + “T” + 1.75-in.) of 36-in. or less are machined from solid barstock. Thermowells with an overall length larger than 42-in. will be constructed using a welded 3-piece design and are available only with a stepped stem style. For lengths between 36 and 42-in. consult factory for construction method.

Code	Sensor type	Junction	
31	Single	Grounded	
32	Dual	Grounded	
33	Single	Ungrounded	
34	Dual, unisolated	Ungrounded	
35	Dual, isolated	Ungrounded	

#### Extension type and material

Code	Extension type	Material	
A <sup>(1)</sup>	Nipple coupling	300 series SST	★
C <sup>(1)</sup>	Nipple union	300 series SST	★
N	None (use with extension length option code 00)	None	

(1) Codes A and C must be used with an Extension Length.

#### Extension length (E)

Code	Description	
00	00-in.	★
30	3.0-in.	★
60	6.0-in.	★

#### Thermowell material

Code	Description	
A	316 SST	★
B	304 SST	★
C	Carbon steel	★
D	316L SST	★
E	304L SST	★
F	Alloy 20	
G	Alloy 400	
H	Alloy 600	
J	Alloy C-276	

Code	Description	
L	Alloy B	
M	304 SST with PTFE coating	
P	Chrome Molybdenum Grade F22	
R	Nickel 200	
T	Titanium	
U <sup>(1)</sup>	316 SST with tantalum sheath	
V	310 SST	
W	321 SST	
Z	Chrome Molybdenum Grade F11	

(1) Available only with straight stem flanged thermowells.

#### Immersion (U), Thermowell (L), and Lagging (T) Length

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
015 <sup>(3)</sup>	1.5-in.	4.0-in.	1.0-in.	★
020 <sup>(3)</sup>	2.0-in.	4.0-in.	0.5-in.	★
025 <sup>(3)</sup>	2.5-in.	4.0-in.	0.0-in.	★
030	3.0-in.	6.0-in.	1.5-in.	★
035	3.5-in.	6.0-in.	1.0-in.	★
040	4.0-in.	6.0-in.	0.5-in.	★
045	4.5-in.	6.0-in.	0.0-in.	★
050	5.0-in.	9.0-in.	2.5-in.	★
055	5.5-in.	9.0-in.	2.0-in.	★
060	6.0-in.	9.0-in.	1.5-in.	★
065	6.5-in.	9.0-in.	1.0-in.	★
070	7.0-in.	9.0-in.	0.5-in.	★
075	7.5-in.	9.0-in.	0.0-in.	★
080	8.0-in.	12.0-in.	2.5-in.	★
085	8.5-in.	12.0-in.	2.0-in.	★
090	9.0-in.	12.0-in.	1.5-in.	★
095	9.5-in.	12.0-in.	1.0-in.	★
100	10.0-in.	12.0-in.	0.5-in.	★
105	10.5-in.	12.0-in.	0.0-in.	★
110	11.0-in.	15.0-in.	2.5-in.	★
115	11.5-in.	15.0-in.	2.0-in.	★
120	12.0-in.	15.0-in.	1.5-in.	★
125	12.5-in.	15.0-in.	1.0-in.	★

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
130	13.0-in.	15.0-in.	0.5-in.	★
135	13.5-in.	15.0-in.	0.0-in.	★
140	14.0-in.	18.0-in.	2.5-in.	★
145	14.5-in.	18.0-in.	2.0-in.	★
150	15.0-in.	18.0-in.	1.5-in.	★
155	15.5-in.	18.0-in.	1.0-in.	★
160	16.0-in.	18.0-in.	0.5-in.	★
165	16.5-in.	18.0-in.	0.0-in.	★
170	17.0-in.	21.0-in.	2.5-in.	★
175	17.5-in.	21.0-in.	2.0-in.	★
180	18.0-in.	21.0-in.	1.5-in.	★
185	18.5-in.	21.0-in.	1.0-in.	★
190	19.0-in.	21.0-in.	0.5-in.	★
195	19.5-in.	21.0-in.	0.0-in.	★
200	20.0-in.	24.0-in.	2.5-in.	★
205	20.5-in.	24.0-in.	2.0-in.	★
210	21.0-in.	24.0-in.	1.5-in.	★
215	21.5-in.	24.0-in.	1.0-in.	★
220	22.0-in.	24.0-in.	0.5-in.	★
225	22.5-in.	24.0-in.	0.0-in.	★
230	23.0-in.	27.0-in.	2.5-in.	★
240	24.0-in.	27.0-in.	1.5-in.	★
250	25.0-in.	27.0-in.	0.5-in.	★
260	26.0-in.	30.0-in.	2.5-in.	★
270	27.0-in.	30.0-in.	1.5-in.	★
280	28.0-in.	30.0-in.	0.5-in.	★
290	29.0-in.	33.0-in.	2.5-in.	★
300	30.0-in.	33.0-in.	1.5-in.	★
310	31.0-in.	33.0-in.	0.5-in.	★
320	32.0-in.	36.0-in.	2.5-in.	★
330	33.0-in.	36.0-in.	1.5-in.	★
340	34.0-in.	36.0-in.	0.5-in.	★
350	35.0-in.	39.0-in.	2.5-in.	★
360	36.0-in.	39.0-in.	1.5-in.	★
370	37.0-in.	39.0-in.	0.5-in.	★
380	38.0-in.	42.0-in.	2.5-in.	★

Code	Immersion length (U)	Thermowell length (L) <sup>(1)</sup>	Lagging length (T) <sup>(2)</sup>	
390	39.0-in.	42.0-in.	1.5-in.	★
400	40.0-in.	42.0-in.	0.5-in.	★
410	41.0-in.	45.0-in.	2.5-in.	★
420	42.0-in.	45.0-in.	1.5-in.	★
430	43.0-in.	45.0-in.	0.5-in.	★
440	44.0-in.	48.0-in.	2.5-in.	★
450	45.0-in.	48.0-in.	1.5-in.	★
460	46.0-in.	48.0-in.	0.5-in.	★
470	47.0-in.	51.0-in.	2.5-in.	★

(1) Thermowells with an overall length (“U” + “T” + 1.75-in.) of 36-in. or less are machined from solid barstock. Thermowells with an overall length larger than 42-in. will be constructed using a welded 3-piece design and are available only with a stepped stem style. For lengths between 36-in. and 42-in. consult factory for construction method.

(2) For additional Lagging (T) lengths, see [Thermowell lagging length \(T\)](#) section.

(3) Available only with straight or tapered stem thermowells.

#### Thermowell style, mounting, and stem

Code	Thermowell style	Mounting	Stem	
T20	Threaded	½–14 ANPT	Stepped	★
T22	Threaded	¾–14 ANPT	Stepped	★
T24	Threaded	1–11.5 ANPT	Stepped	★
T26	Threaded	¾–14 ANPT	Tapered	★
T28	Threaded	1–11.5 ANPT	Tapered	★
T30	Threaded	1½–11 ANPT	Tapered	★
T32	Threaded	½–14 ANPT	Straight	★
T34	Threaded	¾–14 ANPT	Straight	★
T36	Threaded	1–11.5 ANPT	Straight	★
T38	Threaded	¾–14 ANPT	Straight	★
T44	Threaded	½–14 ANPT	Tapered	★
W38	Welded	¾-in. pipe	Stepped	★
W40	Welded	1-in. pipe	Stepped	★
W42	Welded	¾-in. pipe	Tapered	★
W44	Welded	1-in. pipe	Tapered	★
W46	Welded	1¼-in. pipe	Tapered	★
W48	Welded	¾-in. pipe	Straight	★
W50	Welded	1-in. pipe	Straight	★
F10	Flanged	2-in., Class 150	Straight	★
F12	Flanged	3-in., Class 150	Straight	★
F52 <sup>(1)</sup>	Flanged	1-in., Class 150	Stepped	★

Code	Thermowell style	Mounting	Stem	
F54	Flanged	1½-in., Class 150	Stepped	★
F56	Flanged	2-in., Class 150	Stepped	★
F58 <sup>(2)</sup>	Flanged	1-in., Class 150	Tapered	★
F60	Flanged	1½-in., Class 150	Tapered	★
F62	Flanged	2-in. Class 150	Tapered	★
F64 <sup>(1)</sup>	Flanged	1-in., Class 150	Straight	★
F66	Flanged	1½-in., Class 150	Straight	★
F70 <sup>(1)</sup>	Flanged	1-in., Class 300	Stepped	★
F72	Flanged	1½-in., Class 300	Stepped	★
F74	Flanged	2-in., Class 300	Stepped	★
F76 <sup>(2)</sup>	Flanged	1-in., Class 300	Tapered	★
F78	Flanged	1½-in., Class 300	Tapered	★
F80	Flanged	2-in., Class 300	Tapered	★
F82 <sup>(1)</sup>	Flanged	1-in., Class 300	Straight	★
F84	Flanged	1½-in., Class 300	Straight	★
F86	Flanged	2-in., Class 300	Straight	★
F88 <sup>(1)</sup>	Flanged	1-in., Class 600	Stepped	★
F90 <sup>(3)</sup>	Flanged	1½-in., Class 600	Stepped	★
F92 <sup>(3)</sup>	Flanged	2-in., Class 600	Stepped	★
F94 <sup>(2)(3)</sup>	Flanged	1-in., Class 600	Tapered	★
F96 <sup>(3)</sup>	Flanged	1½-in., Class 600	Tapered	★
F98 <sup>(3)</sup>	Flanged	2-in., Class 600	Tapered	★
F02 <sup>(1)(3)</sup>	Flanged	1-in., Class 600	Straight	★
F04 <sup>(3)</sup>	Flanged	1½-in., Class 600	Straight	★
F06 <sup>(3)</sup>	Flanged	2-in., Class 600	Straight	★
F16 <sup>(3)</sup>	Flanged	1½-in., Class 900	Tapered	★
F34 <sup>(3)</sup>	Flanged	1½-in., Class 1500	Tapered	★
F24 <sup>(3)</sup>	Flanged	2-in., Class 1500	Tapered	★
F08 <sup>(4)</sup>	Flanged	1½-in., Class 2500	Tapered	★
Q02 <sup>(5)</sup>	Sanitary, Tri Clamp	1-in., Tri Clamp	Stepped	★
Q04 <sup>(5)</sup>	Sanitary, Tri Clamp	1½-in., Tri Clamp	Stepped	★
Q06 <sup>(5)</sup>	Sanitary, Tri Clamp	2-in., Tri Clamp	Stepped	★
Q08 <sup>(5)</sup>	Sanitary, Tri Clamp	3-in., Tri Clamp	Stepped	★
Q20 <sup>(5)</sup>	Sanitary, Tri Clamp	¾-in., Tri Clamp	Straight	★
Q22 <sup>(5)</sup>	Sanitary, Tri Clamp	1-in., Tri Clamp	Straight	★
Q24 <sup>(5)</sup>	Sanitary, Tri Clamp	1½-in., Tri Clamp	Straight	★

Code	Thermowell style	Mounting	Stem	
Q26 <sup>(5)</sup>	Sanitary, Tri Clamp	2-in., Tri Clamp	Straight	★
Q28 <sup>(5)</sup>	Sanitary, Tri Clamp	3-in., Tri Clamp	Straight	★

- (1) F52, F64, F70, F88, and F02 are not compatible with 1-in. Sch. XXs pipe.  
 (2) F58, F76, and F94 may not be compatible with 1-in. Sch. pipe and are not compatible with 1-in. Sch. 80, 160 or XXS pipe.  
 (3) These options cannot be used with 0-in. (T) length.  
 (4) F08 cannot be used with 0- or ½-in. (T) length.  
 (5) Limited to 24-in. immersion length and 316 or 304 SST materials only.

## Additional options

### Approval options

Code	Description	
E1	ATEX Flameproof approval	★
E2	Ex d- CEPEL Flameproof approval- Brazil	★
E5	FM Explosion-proof approval	★
E6	CSA Explosion-proof approval	★
E7	IECEX Flameproof approval	★
EM	Technical Regulations Customs Union (EAC) Flameproof	★
KD	Combination of FM Explosion-proof, CSA Explosion-proof, and ATEX Flameproof approval	★
KF	Combination of ATEX Flameproof and CSA Explosion-proof approval	★

### Special external pressure test

Code	Description	
R01	Special external pressure test	★

### Material certification

Code	Description	
Q8	Material certification	★

### Dye penetration test

Code	Description	
R03	Dye penetration test	★

### NACE approval

Code	Description	
R05	NACE approval	★

**SST plug and chain**

Code	Description	
R06	Stainless steel plug and chain	★

**Full penetration weld**

Available on flanged thermowells only.

Code	Description	
R07	Full penetration weld	★

**Vent hole**

Code	Description	
R11	Vent hole	★

**Thermowell X-ray**

Code	Description	
R12	Thermowell X-ray	★

**Special surface finish**

Code	Description	
R14	Special surface finish (12 Ra) (maximum "U" length = 22.5-in.)	★

**Ring joint flange**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R16	Ring joint flange (not available with 0-in. [T] length)	★

**Electropolish**

Not available on flanged thermowells and L lengths longer than 24-in.

Code	Description	
R20	Electropolish	★

**Wake frequency**

Code	Description	
R21	Wake frequency-thermowell strength calculation	★

**Internal pressure test**

Code	Description	
R22	Internal pressure test	★

**Brass plug and chain**

Code	Description	
R23	Brass plug and chain	★

**Canadian registration number**

Code	Description	
R24	CRN Marking for British Columbia	
R25	CRN Marking for Alberta	
R26	CRN Marking for Saskatchewan	
R27	CRN Marking for Manitoba	
R28	CRN Marking for Ontario	
R29	CRN Marking for Quebec	
R30	CRN Marking for New Brunswick	
R31	CRN Marking for Nova Scotia	
R32	CRN Marking for Prince Edward Island	
R33	CRN Marking for Yukon Territory	
R34	CRN Marking for Northwest Territory	
R35	CRN Marking for Nunavut	
R36	CRN Marking for Newfoundland and Labrador	

**Thermowell from hex stock**

Code	Description	
R37	Thermowell from hex stock	★

**Assemble to options**

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount 68Q Sanitary Sensor



The Rosemount 68Q Sanitary Sensor has designs that provide flexible and reliable temperature measurements in hygienic process environments.

Features include:

- Industry-standard RTD sensor design
- Tri Clamp endcap designs for easy installation
- 3-A® standards approval
- Variety of enclosure and connection head options
- Calibration services to give you insight to sensor performance (option codes V1–V7)
- Electropolishing surface finish (option code R20)
- Assemble-to-transmitter option (option Code XA)

[VIEW PRODUCT >](#)

### Online Product Configurator

Many products are configurable online using our Product Configurator. Select the **Configure** button or visit our [website](#) to start. With this tool's built-in logic and continuous validation, you can configure your products more quickly and accurately.

### Model codes

Model codes contain the details related to each product. Exact model codes will vary; an example of a typical model code is shown in [Figure 1](#).

**Figure 4: Model Code Example**

<b>3144P D1 A 1 NA</b>	<b>M5 DA1 Q4</b>
<b>1</b>	<b>2</b>

1. Required model components (choices available on most)
2. Additional options (variety of features and functions that may be added to products)

### Specifications and options

See the Specifications and options section for more details on each configuration. Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See the Material selection section for more information.

## Rosemount Series 68Q Sanitary Platinum RTD Sensor Assemblies

### Required model components

#### Model

Code	Description	
0068Q	Sanitary platinum RTD sensor assembly	★

#### Sensor lead wire configuration

Code	Description	
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only	★
D	Rosemount aluminum connection head with ½-in. Entries	★
C	Polypropylene connection head	
G	Rosemount SST connection head with ½-in. entries	

#### Sensor type

Code	Description	
11	Single stepped stem	★
15	Dual stepped stem	★
21	Single straight stem	★
25	Dual straight stem	★
30 <sup>(1)(2)</sup>	Mini general purpose 6-in. lead with ½-in. NPT threaded adapter	★
31 <sup>(1)(2)(3)</sup>	Mini general purpose 6-in. Lead with ½-in. NPSM threaded adapter	★
32 <sup>(1)(2)(3)</sup>	Mini general purpose 180-in. cable with strain relief	★
33 <sup>(1)(2)(3)</sup>	Mini general purpose 300-in. cable with strain relief	★
41 <sup>(2)(4)</sup>	Mini spring-loaded with thermowell replacement sensor	★

- (1) Only available in sensor immersion lengths between 1-in. and 2-in.  
 (2) Only available with Tri Clamp O.D. tube size ½-in. to ¾-in. (Endcap Type code L050).  
 (3) Only available with sensor lead wire termination code N (sensor only).  
 (4) Only available in U lengths of 2-, 2.5-, or 3-in.

#### Sensor immersion length

Code	Description	
U010	1.00-in.	★
U011	1.10-in.	★
U012	1.20-in.	★

Code	Description	
U013	1.25-in.	★
U014	1.40-in.	★
U015	1.50-in.	★
U016	1.60-in.	★
U017	1.70-in.	★
U018	1.80-in.	★
U019	1.90-in.	★
U020	2.00-in.	★
U025	2.50-in.	★
U030	3.00-in.	★
U035	3.50-in.	★
U040	4.00-in.	★
U045	4.50-in.	★
U050	5.00-in.	★
U055	5.50-in.	★
U060	6.00-in.	★
U065	6.50-in.	★
U070	7.00-in.	★
U075	7.50-in.	★
U080	8.00-in.	★
U085	8.50-in.	★
U090	9.00-in.	★
U095	9.50-in.	★

### Endcap type

Code	Description	
L050 <sup>(1)</sup>	Tri Clamp	½- to ¾-in.
L100	Tri Clamp	1.00-in.
L150	Tri Clamp	1.50-in.
L200	Tri Clamp	2.00-in.
L250	Tri Clamp	2.50-in.
L300	Tri Clamp	3.00-in.

(1) Only available in sensor type code 30, 31, 32, 33, 41.

## Additional options

### Callendar-Van Dusen constant

Code	Description	
V1–V7	Callendar-Van Dusen constant	★

### Calibration schedule

Code	Description	
X8	Customer-specified temperature range calibration	★
X9	Customer-specified single temperature point calibration	★

### Calibration certification

Code	Description	
Q4	Calibration certification, customer-specified temperature	★

### Special surface finish electro polish

If ordering a mini general purpose or mini spring-loaded sensor (sensor type codes 30, 31, 32, 33, or 41) with electropolishing, high mechanical polish (option code HP) is also required.

Code	Description	
R20	Electropolishing of wetted surfaces	★

### Special surface finish high mechanical polish

Code	Description	
HP	High mechanical polish (15 R <sub>a</sub> or better)	★

### Material certification

Code	Description	
Q8	Material certification	★

### Surface finish certification

Code	Description	
Q16	Surface finish certification	★

### Assemble to options

Code	Description	
XA	Assemble connection head or transmitter to a sensor assembly	★

## Rosemount 58C Cut-to-Fit Sensor

The Rosemount 58C Cut-to-Fit Sensor has designs that provide flexible and reliable temperature measurements in process environments.

Features include:

- Industry-standard RTD sensor design
- Cut-to-fit eliminates need to stock large selection of sensors in specific lengths
- 12-, 24-, 36-, and 48-in. lengths available

CONFIGURE >

VIEW PRODUCT >

### Online Product Configurator

Many products are configurable online using our Product Configurator. Select the **Configure** button or visit our [website](#) to start. With this tool's built-in logic and continuous validation, you can configure your products more quickly and accurately.

### Model codes

Model codes contain the details related to each product. Exact model codes will vary; an example of a typical model code is shown in [Figure 1](#).

Figure 5: Model Code Example

**3144P D1 A 1 NA    M5 DA1 Q4**

**1                      2**

1. Required model components (choices available on most)
2. Additional options (variety of features and functions that may be added to products)

### Specifications and options

See the Specifications and options section for more details on each configuration. Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See the Material selection section for more information.

### Required model components

#### Model

Code	Description	
0058C	Platinum resistance temperature sensor	★

## Connection head

Code	Description	
D	Rosemount aluminum connection head with ½-in. Entries	★
R	Aluminum connection head, six terminals, flat cover, unpainted	★
T	Aluminum connection head, six terminals, extended cover, unpainted	★
P	Aluminum connection head, six terminals, flat cover, painted	★
L	Aluminum connection head, six terminals, extended cover, painted	★
N	Sensor only with 6-in. PTFE-insulated, 24-gauge lead wires	★
C	Polypropylene connection head	
G	Rosemount SST Connection with ½-in. Entries	

## Sensor immersion length

Code	Description	
1200	12-in.	★
2400	24-in.	★
3600	36-in.	★
4800	48-in.	★

## Mounting adapter

Code	Description	
NNN	None	★
C01 <sup>(1)</sup>	One-compression fitting ½–14 ANPT	★
C02 <sup>(1)</sup>	Two-compression fittings ½–14 ANPT	★
SNN	Spring-loaded fitting ½–14 ANPT	★

(1) The only difference between C01 and C02 is that the C01 includes one fitting, and the C02 option includes two fittings.

## Additional options

### Callendar-Van Dusen constant

Code	Description	
V1–V7	Callendar-Van Dusen constant	★

### Calibration schedule

Code	Description	
X8	Customer-specified temperature range calibration	★

Code	Description	
X9	Customer-specified single temperature point calibration	★

### Calibration certification

Code	Description	
Q4	Calibration certification, customer-specified temperature	★

### Mounting adapters

Code	Description	
M5-M7	Mounting adapter: Sensor compression fitting: 1/8-27 NPT, M6 = 1/4-18 NPT, M7 = 1/2-14 NPT	★

### A Leadkit

Code	Description	
A1-A8	Twisted lead wire extension: A1 = 1.5 ft., A2 = 3.0 ft., A3 = 6.0 ft., A4 = 12 ft., A5 = 24 ft., A6 = 50 ft., A7 = 75 ft., A8 = 100 ft.	★

## Rosemount Series 58C Spare Parts List

Specify spare part number separately when ordering mounting adapters.

Mounting adapters	Option code	Spare part number
Compression fitting 1/2-14 ANPT	C01 and C02	C07961-0008
Spring loaded fitting 1/2-14 ANPT	SNN	00058-0010-0001



**Thermowell material**

Code	Description	
N	No thermowell required	★

**Immersion length (U)**

Thermowells with an overall lengths (“U” + “T” + 1.75-in.) of 36-in. or less are machined from solid bar stock. Thermowells with an overall length larger than 42-in. will be constructed using a welded 3-piece design and are available only with a stepped stem style. For lengths between 36 and 42 inches, consult factory for construction method.

Code	Description	
005 <sup>(1)(2)</sup>	0.5-in.	★
007 <sup>(1)(2)</sup>	0.75-in.	★
010 <sup>(1)(2)</sup>	1.0-in.	★
015 <sup>(1)</sup>	1.5-in.	★
020 <sup>(1)</sup>	2.0-in.	★
025 <sup>(1)</sup>	2.5-in.	★
030	3.0-in.	★
035	3.5-in.	★
040	4.0-in.	★
045	4.5-in.	★
050	5.0-in.	★
055	5.5-in.	★
060	6.0-in.	★
065	6.5-in.	★
070	7.0-in.	★
075	7.5-in.	★
080	8.0-in.	★
085	8.5-in.	★
090	9.0-in.	★
095	9.5-in.	★
100	10.0-in.	★
105	10.5-in.	★
110	11.0-in.	★
115	11.5-in.	★
120	12.0-in.	★
125	12.5-in.	★
130	13.0-in.	★

Code	Description	
135	13.5-in.	★
140	14.0-in.	★
145	14.5-in.	★
150	15.0-in.	★
155	15.5-in.	★
160	16.0-in.	★
165	16.5-in.	★
170	17.0-in.	★
175	17.5-in.	★
180	18.0-in.	★
185	18.5-in.	★
190	19.0-in.	★
195	19.5-in.	★
200	20.0-in.	★
205	20.5-in.	★
210	21.0-in.	★
215	21.5-in.	★
220	22.0-in.	★
225	22.5-in.	★
230	23.0-in.	★
240	24.0-in.	★
250	25.0-in.	★
260	26.0-in.	★
270	27.0-in.	★
280	28.0-in.	★
290	29.0-in.	★
300	30.0-in.	★
310	31.0-in.	★
320	32.0-in.	★
330	33.0-in.	★
340	34.0-in.	★
350	35.0-in.	★
360	36.0-in.	★
370	37.0-in.	★
380	38.0-in.	★
390	39.0-in.	★

Code	Description	
400	40.0-in.	★
410	41.0-in.	★
420	42.0-in.	★
430	43.0-in.	★
440	44.0-in.	★
450	45.0-in.	★
460	46.0-in.	★
470	47.0-in.	★
480	48.0-in.	★

(1) Available only in straight or tapered stem only.

(2) Only available with thermowell mounting style Q20.

### Thermowell mounting style

Code	Thermowell mounting style	Stem style	Tip diameter (A)	Root diameter (B)	
T20	Thread, ½-14 ANPT	Stepped	0.50-in.	0.63-in.	★
T22	Thread, ¾-14 ANPT	Stepped	0.50-in.	0.75-in.	★
T24	Thread, 1-11.5 ANPT	Stepped	0.50-in.	0.88-in.	★
T26	Thread, ¾-14 ANPT	Tapered	0.63-in.	0.88-in.	★
T28	Thread, 1-11.5 ANPT	Tapered	0.63-in.	1.06-in.	★
T30	Thread, 1½-11.5 ANPT	Tapered	0.75-in.	1.50-in.	★
T32	Thread, ½-14 ANPT	Straight	0.50-in.	0.50-in.	★
T34	Thread, ¾-14 ANPT	Straight	0.75-in.	0.75-in.	★
T36	Thread, 1-11.5 ANPT	Straight	0.75-in.	0.75-in.	★
T38	Thread, ¾-14 ANPT	Straight	0.50-in.	0.50-in.	★
T44	Thread, ½-14 ANPT	Tapered	0.50-in.	0.63-in.	★
W38	Weld, ¾-in. pipe	Stepped	0.50-in.	0.75-in.	★
W40	Weld, 1-in. pipe	Stepped	0.50-in.	0.88-in.	★
W42	Weld, ¾-in. pipe	Tapered	0.63-in.	0.82-in.	★
W44	Weld, 1-in. pipe	Tapered	0.75-in.	1.00-in.	★
W46	Weld, 1¼-in. pipe	Tapered	0.75-in.	1.25-in.	★
W48	Weld, ¾-in. pipe	Straight	0.75-in.	0.75-in.	★
W50	Weld, 1-in. pipe	Straight	0.75-in.	0.75-in.	★
F10	Flange, F = 2-in., Class 150	Straight	0.75-in.	0.75-in.	★
F12	Flange, F = 3-in., Class 150	Straight	0.75-in.	0.75-in.	★
F52 <sup>(1)</sup>	Flange, F = 1-in., Class 150	Stepped	0.50-in.	0.75-in.	★
F54	Flange, F = 1½-in., Class 150	Stepped	0.50-in.	0.75-in.	★

Code	Thermowell mounting style	Stem style	Tip diameter (A)	Root diameter (B)	
F56	Flange, F = 2-in., Class 150	Stepped	0.50-in.	0.75-in.	★
F58 <sup>(2)</sup>	Flange, F = 1-in., Class 150	Tapered	0.75-in.	1.00-in.	★
F60	Flange, F = 1½-in., Class 150	Tapered	0.75-in.	1.00-in.	★
F62	Flange, F = 2-in., Class 150	Tapered	0.75-in.	1.25-in.	★
F64 <sup>(1)</sup>	Flange, F = 1-in., Class 150	Straight	0.75-in.	0.75-in.	★
F66	Flange, F = 1½-in., Class 150	Straight	0.75-in.	0.75-in.	★
F70 <sup>(1)</sup>	Flange, F = 1-in., Class 300	Stepped	0.50-in.	0.75-in.	★
F72	Flange, F = 1½-in., Class 300	Stepped	0.50-in.	0.75-in.	★
F74	Flange, F = 2-in., Class 300	Stepped	0.50-in.	0.75-in.	★
F76 <sup>(2)</sup>	Flange, F = 1-in., Class 300	Tapered	0.75-in.	1.00-in.	★
F78	Flange, F = 1½-in., Class 300	Tapered	0.75-in.	1.00-in.	★
F80	Flange, F = 2-in., Class 300	Tapered	0.75-in.	1.25-in.	★
F82 <sup>(1)</sup>	Flange, F = 1-in., Class 300	Straight	0.75-in.	0.75-in.	★
F84	Flange, F = 1½-in., Class 300	Straight	0.75-in.	0.75-in.	★
F86	Flange, F = 2-in., Class 300	Straight	0.75-in.	0.75-in.	★
F88 <sup>(2)</sup>	Flange, F = 1-in., Class 600	Stepped	0.50-in.	0.75-in.	★
F90 <sup>(3)</sup>	Flange, F = 1½-in., Class 600	Stepped	0.50-in.	0.75-in.	★
F92 <sup>(3)</sup>	Flange, F = 2-in., Class 600	Stepped	0.50-in.	0.75-in.	★
F94 <sup>(1)(3)</sup>	Flange, F = 1-in., Class 600	Tapered	0.75-in.	1.00-in.	★
F96 <sup>(3)</sup>	Flange, F = 1½-in., Class 600	Tapered	0.75-in.	1.00-in.	★
F98 <sup>(3)</sup>	Flange, F = 2-in., Class 600	Tapered	0.75-in.	1.25-in.	★
F02 <sup>(1)(3)</sup>	Flange, F = 1-in., Class 600	Straight	0.75-in.	0.75-in.	★
F04 <sup>(3)</sup>	Flange, F = 1½-in., Class 600	Straight	0.75-in.	0.75-in.	★
F06 <sup>(3)</sup>	Flange, F = 2-in., Class 600	Straight	0.75-in.	0.75-in.	★
F16 <sup>(3)</sup>	Flange, F = 1½-in., Class 900	Tapered	0.75-in.	1.00-in.	★
F34 <sup>(3)</sup>	Flange, F = 1½-in., Class 1500	Tapered	0.75-in.	1.00-in.	★
F24 <sup>(3)</sup>	Flange, F = 2-in., Class 1500	Tapered	0.75-in.	1.25-in.	★
F08 <sup>(4)</sup>	Flange, F = 1½-in., Class 2500	Tapered	0.75-in.	1.00-in.	★
Q02 <sup>(5)</sup>	Sanitary, 1-in., Tri Clamp	Stepped	0.50-in.	0.75-in.	★
Q04 <sup>(5)</sup>	Sanitary, 1½-in., Tri Clamp	Stepped	0.50-in.	0.75-in.	★
Q06 <sup>(5)</sup>	Sanitary, 2-in., Tri Clamp	Stepped	0.50-in.	0.75-in.	★
Q08 <sup>(5)</sup>	Sanitary, 3-in., Tri Clamp	Stepped	0.50-in.	0.75-in.	★
Q20 <sup>(5)</sup>	Sanitary, ¾-in., Tri Clamp	Straight	0.44-in.	0.44-in.	★
Q22 <sup>(5)</sup>	Sanitary, 1-in., Tri Clamp	Straight	0.50-in.	0.50-in.	★
Q24 <sup>(5)</sup>	Sanitary, 1½-in., Tri Clamp	Straight	0.50-in.	0.50-in.	★
Q26 <sup>(5)</sup>	Sanitary, 2-in., Tri Clamp	Straight	0.50-in.	0.50-in.	★

Code	Thermowell mounting style	Stem style	Tip diameter (A)	Root diameter (B)	
Q28 <sup>(5)</sup>	Sanitary, 3-in., Tri Clamp	Straight	0.50-in.	0.50-in.	★

(1) F52, F64, F70, F82, F88 and F02 are not compatible with 1-in. Sch. XXS pipe.

(2) F58, F76 and F94 may not be compatible with 1-in. Sch. pipe and are not compatible with 1-in. Sch. 80, 160 or XXS pipe.

(3) These options cannot be used with 0-in. (T) length.

(4) F08 cannot be used with 0- or ½-in. (T) length.

(5) Limited to 24-in. immersion length and 316 or 304 SST materials only.

### Thermowell lagging length (T)

Code	Description	
T000	0.0-in.	★
T005	0.5-in.	★
T010	1.0-in.	★
T015	1.5-in.	★
T020	2.0-in.	★
T025	2.5-in.	★
T030	3.0-in.	★
T035	3.5-in.	★
T040	4.0-in.	★
T045	4.5-in.	★
T050	5.0-in.	★
T055	5.5-in.	★
T060	6.0-in.	★
T065	6.5-in.	★
T070	7.0-in.	★
T075	7.5-in.	★
T080	8.0-in.	★
T085	8.5-in.	★
T090	9.0-in.	★
T095	9.5-in.	★

### Instrument connection thread

Code	Description	
P	½-14 NPSM	★
D	½-14 ANPT	★

## Additional options

### External pressure test

Maximum (U) length = 42.0-in.

Code	Description	
R01	External pressure test	★

### Material certification

Code	Description	
Q8	Material certification	★

### Dye penetration test

Code	Description	
R03	Dye penetration test	★

### NACE approval

Code	Description	
R05	NACE approval	★

### SST plug and chain

Code	Description	
R06	Stainless steel plug and chain	★

### Full penetration weld

Available on flanged thermowells only.

Code	Description	
R07	Full penetration weld	★

### Flange face options

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R09	Concentric serrations of thermowell flange face	★

### Flat-faced flange

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R10	Flat-faced flange	★

**Vent hole**

Code	Description	
R11	Vent hole	★

**Special surface finish**

Code	Description	
R14	Special surface finish (12 Ra) (maximum "U" length = 22.5-in.)	★

**Ring joint flange**

Available on flanged thermowells only. Only one flange face option allowed.

Code	Description	
R16	Ring joint flange (not available with 0-in. [T] length)	★

**Electropolish**

Not available on flanged thermowells and L lengths longer than 24-in.

Code	Description	
R20	Electropolish	★

**Wake frequency**

Code	Description	
R21	Wake frequency-thermowell strength calculation	★

**Internal pressure test**

Code	Description	
R22	Internal pressure test	★

**Brass plug and chain**

Code	Description	
R23	Brass plug and chain	★

**Canadian registration number**

Code	Description	
R24	CRN Marking for British Columbia	
R25	CRN Marking for Alberta	
R26	CRN Marking for Saskatchewan	
R27	CRN Marking for Manitoba	

Code	Description	
R28	CRN Marking for Ontario	
R29	CRN Marking for Quebec	
R30	CRN Marking for New Brunswick	
R31	CRN Marking for Nova Scotia	
R32	CRN Marking for Prince Edward Island	
R33	CRN Marking for Yukon Territory	
R34	CRN Marking for Northwest Territory	
R35	CRN Marking for Nunavut	
R36	CRN Marking for Newfoundland and Labrador	

### Thermowell from hex stock


Code	Description	
R37	Thermowell from hex stock	★

### Sensor series and dimensions

Seires	Housing diameter	Number of lead wires	Lead wire length
68	0.350 (8)	4	6.0 (152.4)
78 single	0.350 (8)	4	6.0 (152.4)
78 dual	0.350 (8)	6	6.0 (152.4)
183 single	0.375 (9.53)	2	6.0 (152.4)
183 dual	0.375 (9.53)	4	12.0 (304.8)

Dimensions are in inches (mm).

## How to decide what to order

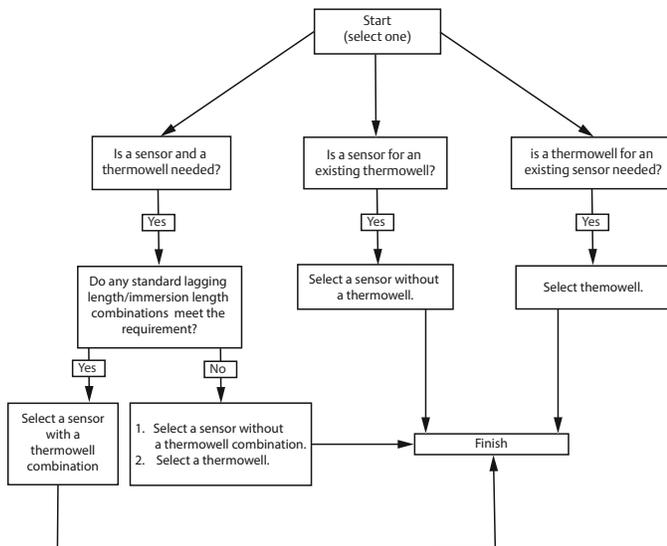

### Model code visible

If Rosemount sensor and model code is visible on the sensor:

#### Procedure

1. If the thermowell is ordered separately (0078P21C30N060) 11<sup>th</sup> digit = 'N'
  - a) Start with immersion length - digits 12–14; 060 = 6.0-in.
  - b) Add extension length - digits 9 and 10; 30 = 3.0-in. (3 + 6 = 9)
  - c) Order the replacement sensor for the total length without connection heads (5<sup>th</sup> digit N) and extension (8<sup>th</sup> digit N) 0078N21N00N090.
2. If the thermowell is ordered integral to sensor (0078P21C30A060W40) 11<sup>th</sup> digit = not 'N'
  - a) Immersion length 'U' is defined by the 12–14<sup>th</sup> digits; 060 = 6.0-in.
  - b) Look up 'L' length from the correct order chart for given 'U' length. This will be 4-in for short sensors, or a whole number divisible by three for sensors longer than 4-in. (4, 6, 9, 12, 15, 18... inches); 'U' 060 = 9-in. 'L'.
  - c) Add extension length as defined by 9<sup>th</sup> and 10<sup>th</sup> digits; 30 = 3.0-in. to the 'L' length found in table. (9-in. + 3-in. = 12-in., Length code 120).
  - d) This will be the replacement sensor length 'X'.
  - e) Order sensor without connection head (5<sup>th</sup> digit N) or extension (8<sup>th</sup> digit N) 0078N21N00N120.

### Model code not visible

If model code is NOT visible on the sensor, follow one of three steps below.

#### Procedure

1. Measure the inside depth of the thermowell.

- a) Measure down the inside of the thermowell hole to the top-most face of the extension used, or the thermowell if no extension.
  - b) This will be the replacement sensor length if depth = 12.0-in., sensor length will be 12-in.
  - c) Order sensor without connection heads (5<sup>th</sup> digit N) or extension (8<sup>th</sup> digit N) 0078N21N00N120.
2. Measure the overall outside length of the thermowell from end to end.
- a) Measure down the outside of the thermowell from the tip to the end face of the extension if used, or the thermowell if no extension.
  - b) Subtract ¼-in. to account for thickness of the thermowell at the tip.
  - c) This will be the replacement sensor length. Overall length = 12.2-in., the replacement will be 12-in.
  - d) Order sensor without connection heads (5<sup>th</sup> digit N) or extension (8<sup>th</sup> digit N) 0078N21N00N120.
3. Measure the old sensor length from tip to the flat face of the threaded process connection.
- a) Determine if the sensor is spring loaded or general purpose (welded) where the sensor sheath meets the threaded adapter.
  - b) For spring loaded sensors, the measurement of the exposed sheath from tip of the start of the threaded portion will be the same as the replacement sensor length.
    - Normal spring compression for a Rosemount sensor is assumed to be ½-in. and the normal thread engagement is also assumed to be ½-in.
    - Round to the nearest whole ¼-in. increment as the spring will make up any small differences.
    - Replacement sensor for a spring loaded sensor measuring 6.5-in. will be 6.5-in. length.
  - c) Order sensor without connection heads (5<sup>th</sup> digit N) or extension (8<sup>th</sup> digit N) 0078N15N00N065.
  - d) For general purpose sensors with the distance from tip to threaded adapter:
    - Add ¼-in. to allow clearance, preventing bottoming sensor during installation.
    - Add ½-in. for the thread engagement of the sensor in the thermowell.
    - The replacement sensor for a general purpose sensor measuring 5.75-in. from the tip to the threaded adapter is 6.5-in. ( $5\frac{3}{4} + \frac{1}{4} + \frac{1}{2} = 6\frac{1}{2}$ -in).
  - e) Order sensor without connection heads (5<sup>th</sup> digit N) or extension (8<sup>th</sup> digit N) 0078N15N00N065.

## Model code on thermowell

If model code is visible on the thermowell (0091A060W40T015P), follow the instructions below to determine sensor model number.

### Procedure

Start with immersion length digits 6–8, 060 = 6.0-in.


- Add additional lagging length digits 13–15, 015 = 1.5-in.
- To those lengths add 1.5-in. (this is the additional standard lagging length on all Rosemount thermowells) 1.75-in. minus (0.25-in. thermowell tip thickness) = 1.50-in.
- $6.0 + 1.5 + 1.5 = 9$ -in.
- Order replacement sensor 0078N21N00N090.

## Spring-loaded sensor dimensions


When a spring-loaded sensor is used properly, the spring should be compressed approximately  $\frac{1}{2}$ -in. Therefore, all measurements of spring-loaded sensors are made with the spring compressed. If you measure an existing spring-loaded sensor while it is in a relaxed state, you must subtract  $\frac{1}{2}$ -in. to arrive at the installed length (X) that must be ordered. See [Figure 7](#).

**Figure 7: Spring-loaded Sensor Dimensions**

Compressed spring-loaded sensor<sup>(1)</sup>

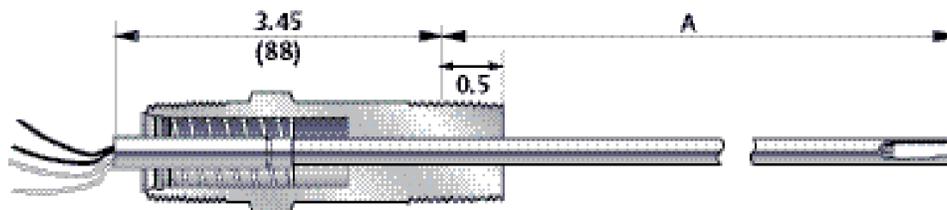

Relaxed spring-loaded sensor<sup>(2)</sup>

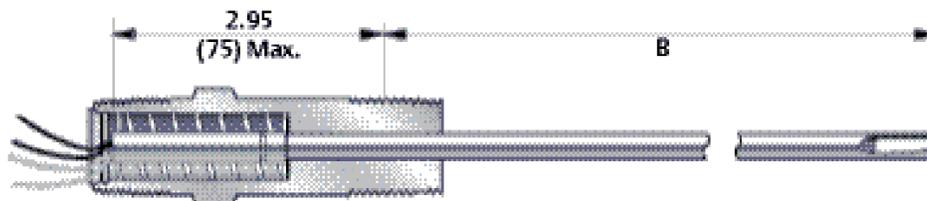

- Spring-loaded sensor in a compressed state: The actual sensor length is measured when the spring is compressed approximately  $\frac{1}{2}$ -in. shorter than the relaxed sensor.*
- Spring-loaded sensor in a relaxed state: Normally, when a spring-loaded sensor is measured, it is in a relaxed state. You must subtract  $\frac{1}{2}$ -in. from your measurement to order a replacement sensor. Emerson assumes that the sensor length you specify is that of a compressed sensor.*

A. Installed (X) length [spring compressed 0.5 (13) nominal]

B. Installed (X) length + 0.5-in.

Dimensions are in inches (millimeters).

## Determining the length (L) of a spring-loaded sensor to be used with an existing non-Rosemount thermowell

(See [Figure 7](#), [Figure 9](#), and [Figure 13](#)).

### Procedure

1. Remove the existing sensor from the installed thermowell.
2. Measure the sensor length with the spring in the relaxed state (as shown in [Figure 7](#)). Measure from the tip of the sensor to the maximum thread engagement point (0.53-in. into the threads).
3. Subtract 0.5-in. from your measurement. The resulting length is (X).
4. If the sensor is installed with an extension, measure the extension length (E), as shown in [Figure 13](#). If the sensor is not installed with an extension, let (E) = 0.
5. Since (X) = (E) + (L), subtract (E) from (X) to find (L).
6. Use the resulting length (L) in the Section 2 ordering tables to choose the correct length of sensor.

**Table 1: Length Code Key**

Code	Length
L	Thermowell length minus tip thickness
U	Thermowell Immersion length into process
T	Thermowell lagging length
E	Extension fitting length
X	Sensor length


Use the following equations to determine all lengths:

$$L = U + T + 1.5$$

$$X = E + L$$

$$X = E + U + T + 1.5$$

**Figure 8: Thermowell Dimensions (Use with Sensor Ordering Tables)**

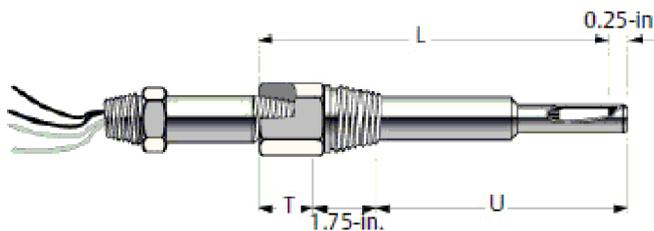

For L, T, and U, refer to [Table 1](#).

### Procedure

1. Determine the (U), (T), and (E) lengths necessary for your installation. If you do not need an extension, (E) = 0 (zero).

**Note**

If your existing sensor/thermowell combination is different than [Figure 8](#), refer to the drawings on the following pages.

2. Find your immersion length (U) on [Table 3](#) and compare the corresponding lagging length (T) to the lagging length that you previously determined.

3. If your lengths match the values on the line that corresponds to your required immersion length, order your sensor and thermowell together.
4. If your lengths do not match the values on the line that corresponds to your measured immersion length, order your sensor and thermowell separately. Solve for (L) using the equation  $(L) = (U) + (T) + 1.5$  (since (L) is required when ordering the sensor separately from the thermowell).

**Table 2: Length Code Key**

Code	Length
L	Thermowell length minus tip thickness
U	Immersion length into process
T	Lagging length
E	Extension fitting length
X	Sensor length

Use the following equations to determine all lengths:

$$L = U + T + 1.5$$


$$X = E + L$$

$$X = E + U + T + 1.5$$

# Dimensional drawings

## Rosemount Series 68, 78, and 183 Sensor Assembly


Figure 9: Capsule Sensor Only

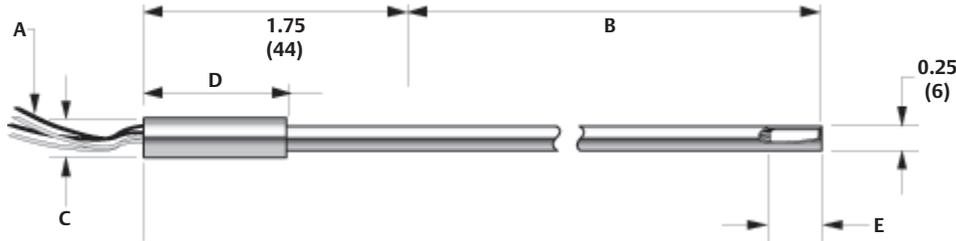

- A. Lead wires (see Table 3)
- B. Nominal (X) length
- C. Rear housing diameter (see Table 3)
- D. Rear housing length (see Table 3)
- E. Max. sensing element length (see Table 3)

Dimensions are in inches (millimeters).


Figure 10: General-Purpose Sensor Assembly

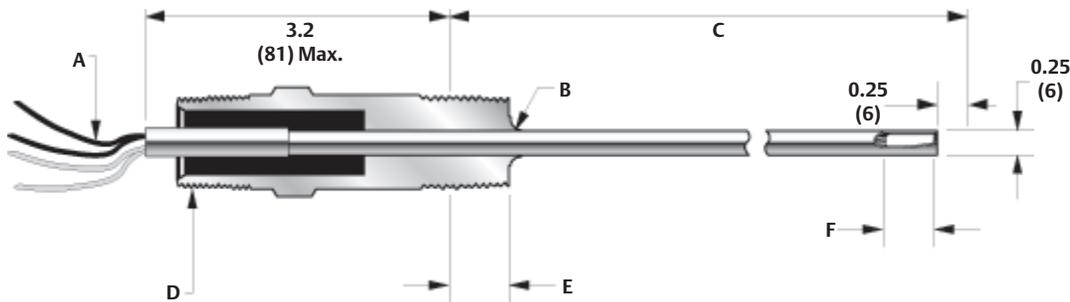

- A. Lead wires (see Table 3)
- B. Weld
- C. Nominal (X) length (actual length is 0.25 (6) less to avoid bottoming in thermowell)
- D. Fixed-position process mounting connection (1/2-14 ANPT, both sides)
- E. 0.53 (13) max. thread engagement
- F. Max. sensing element length (see Table 3)

Dimensions are in inches (millimeters).


**Figure 11: Spring-Loaded Sensor Assembly**

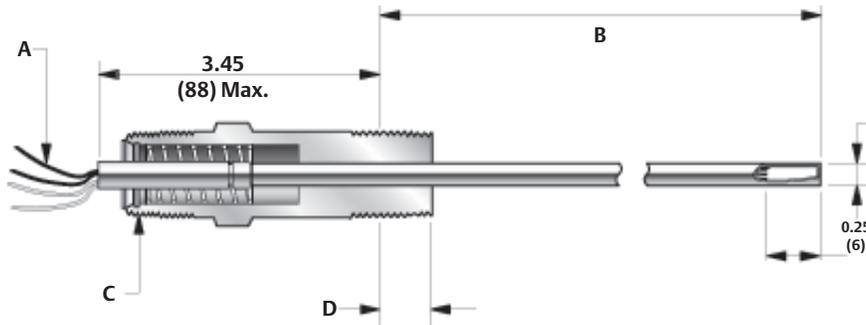

- A. Lead wires (see [Table 9](#))
- B. Installed (X) length [spring compressed 0.5 (13)]
- C. Spring-positioned process mounting connection (1/2-14 ANPT, both sides)
- D. 0.53 (13) Max. thread engagement

Dimensions are in inches (millimeters).

**Figure 12: Bayonet Spring-Loaded Sensor Assembly**

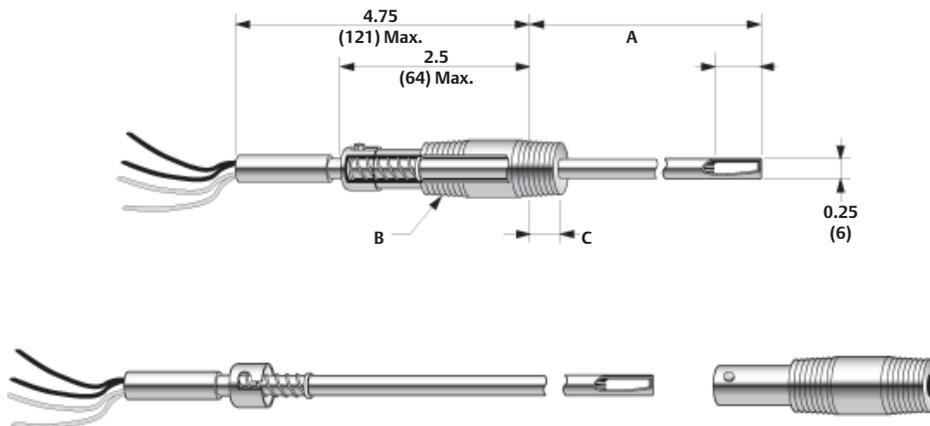

- A. Installed (X) length [spring is shown compressed 0.5 (13)]
- B. Bayonet adapter mounting connection (1/2-14 ANPT, both sides)
- C. 0.53 (13) max. thread engagement


Dimensions are in inches (millimeters).

**Table 3: Sensor Series and Dimensions**

Series	Rear housing diameter	Rear housing length	Max. sensing element length	Number of lead wires	Lead wire length
68	0.25 (6)	0.5 (13)	0.9 (23)	4	6.0 (152)
78 Single	0.34 (9)	1.32 (34)	0.6 (15)	4	6.0 (152)
78 Dual	0.34 (9)	1.32 (34)	1.0 (25)	6	6.0 (152)
183 Single	0.375 (9.5)	1.25 (32)	0.25 (6)	2	6.5 (165)
183 Dual	0.375 (9.5)	1.25 (32)	0.5 (13)	4	6.5 (165)

## Rosemount Series 68, 78, and 183 Sensor Assembly length code

**Figure 13: Sensor with Thermowell (No Extension)**

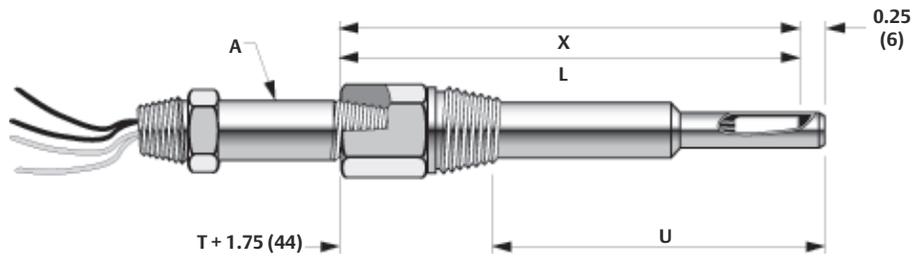


A. Sensor mounting connection

For X, L, and U, refer to [Table 1](#).

Dimensions are in inches (millimeters).

**Figure 14: Sensor with Extension (No Thermowell)**

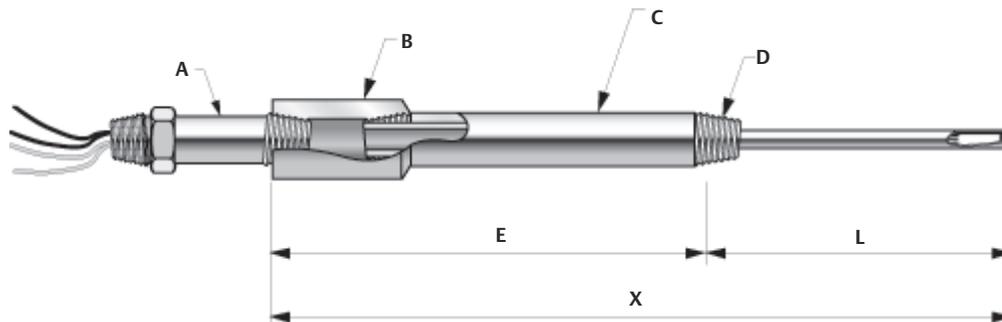

A. Sensor mounting connection


B. Coupling

C. Nipple

D. 1/2-14 ANPT thread

For E, L, and X, see [Table 1](#).

Dimensions are in inches (millimeters).

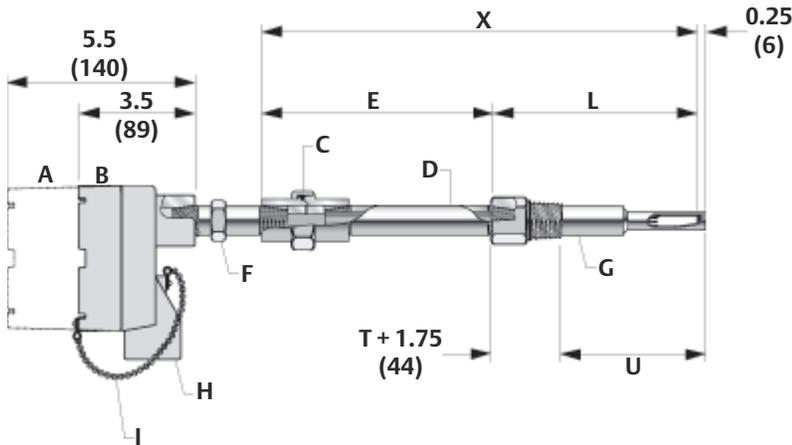**Figure 15: Sensor Installed with Union and Nipple Extension and Thermowell**

- A. Extended cover
- B. Flat cover
- C. Union
- D. Nipple
- E. Sensor mounting connection
- F. Thermowell
- G. Chain
- H.  $\frac{3}{4}$ -14 ANPT

For E, L, U, and X, refer to [Table 1](#).


Dimensions are in inches (millimeters).

## Temperature sensor assemblies

Rosemount Series 68, 68Q, and 78 RTD and Series 183 Thermocouple Sensors may be ordered as complete assemblies. These assemblies provide a complete, yet simple means of specifying the proper industrial hardware for most temperature measurements.

One assembly model number, derived from one ordering table, completely defines the type of sensing element, as well as the material, length, and style of both the extension fittings and thermowells. All sensor assemblies are sized and inspected by Emerson Process Management to ensure complete component compatibility and performance.

Figure 16: Individual Components of a Complete Temperature Assembly

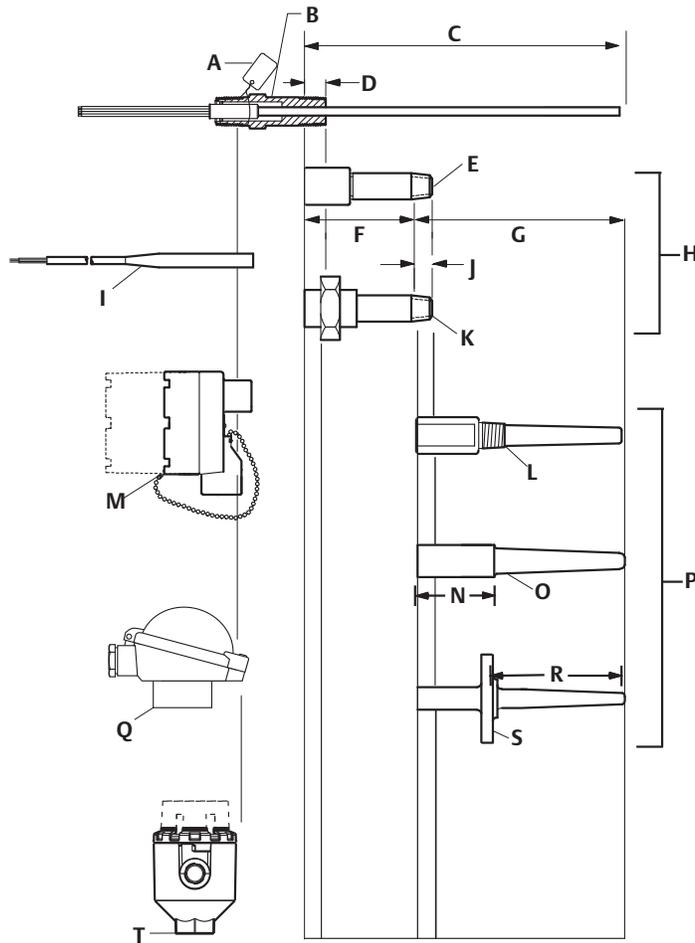

- |   |  |
|---|--|
| <b>A</b> Optional identification tag      | <b>K</b> Union-nipple  |
| <b>B</b> Standard adapter sensor assembly | <b>L</b> Threaded  |
| <b>C</b> Length "X"                       | <b>M</b> Aluminum connection heads (with flat or extended cover)                       |
| <b>D</b> 0.5 (13) nominal engagement      | <b>N</b> T + 1.75  |
| <b>E</b> Coupling-nipple                  | <b>O</b> Welded  |
| <b>F</b> Length "E"                       | <b>P</b> Thermowells   |
| <b>G</b> Length "L"                       | <b>Q</b> Polypropylene connection head   |
| <b>H</b> Extensions                       | <b>R</b> Length "U"  |
| <b>I</b> Lead wire extensions and seals   | <b>S</b> Flanged   |
| <b>J</b> 0.5 (13) Nominal Engagement      | <b>T</b> Rosemount aluminum connection head (with standard or LCD display meter cover) |

Dimensions are in inches (millimeters).

## Mounting configurations

### Capsule

Capsules are designed for direct immersion without mounting fittings. Accessory compression fittings are available for adjustable mounting into a thermowell. See [Mounting adapters for Rosemount Series 58, 68, 78, and 183](#).

### General-purpose sensor assemblies

Designed with a welded, fixed-position, ½–14 ANPT process connection fitting for direct immersion or thermowell applications. This sensor design provides a moisture-proof and vapor-tight seal. The maximum static working pressure at 20 °C (68 °F) with no vibration or flow condition is 24.13 MPa (3,500 psig). The use of a thermowell is recommended for process pressure containment. Note that standard lengths are ¼-in. less than nominal dimension to prevent bottoming of the sensor in a thermowell.

### Spring-loaded sensor assemblies

Spring-loaded sensors have a spring-positioned, ½–14 ANPT process connection fitting that ensures good surface contact in thermowells for faster time response and vibration resistance. Spring-loaded sensors are not intended to provide a process seal. They must be used in conjunction with a thermowell for this purpose.


#### Note

When a spring-loaded sensor is used properly, the spring should be compressed approximately ½-in.

### Bayonet spring-loaded sensor assemblies

Bayonet assemblies have the same advantages as the spring-loaded sensor. However, the bayonet connector permits the sensor to be easily removed from the process without tools.

**Figure 17: Rosemount Series 68, 68Q, 78, and 58C Lead Wire Configurations**

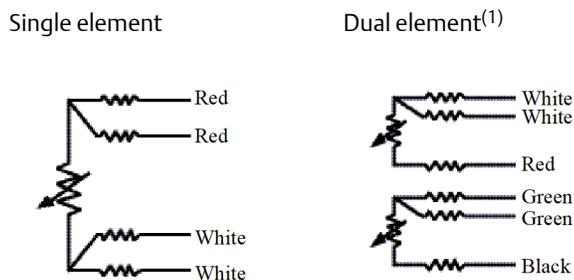

(1) Dual element sensors are only available on Rosemount Series 68Q and 78 Sensors.

## Rosemount Series 68 Platinum RTD

Rosemount Series 68 Platinum Resistance Temperature Sensors measure from  $-50$  to  $400$  °C ( $-58$  to  $752$  °F). Series 68 Class B, Pt100-385 sensors are available in capsule, general purpose, and spring-loaded designs in sensor lengths from one to 48-in.


Table 4 shows the interchangeability of the Series 68 RTD. As an option, for maximum system accuracy, Emerson Process Management can provide sensor calibration. See [Sensor characterization \(calibration\) schedules— option code V](#). In addition, Emerson Process Management offers optional sensor-to-transmitter matching capability obtainable through the use of Callendar-Van Dusen Constants.

**Table 4: Rosemount Series 68 Interchangeability**

$\pm 0.55$ °C ( $\pm 0.99$ °F) at $-50$ °C ( $-58$ °F)
$\pm 0.30$ °C ( $\pm 0.54$ °F) at $0$ °C ( $32$ °F)
$\pm 0.80$ °C ( $\pm 1.44$ °F) at $100$ °C ( $212$ °F)
$\pm 1.30$ °C ( $\pm 2.34$ °F) at $200$ °C ( $392$ °F)
$\pm 1.80$ °C ( $\pm 3.24$ °F) at $300$ °C ( $572$ °F)
$\pm 2.30$ °C ( $\pm 4.14$ °F) at $400$ °C ( $752$ °F)

## Construction

**Figure 18: Construction of a Platinum Thin Film RTD**

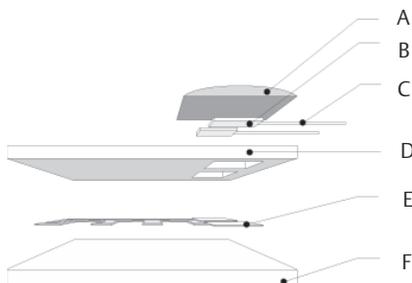

- A. Connection seal
- B. Connection pads
- C. Connection leads
- D. Passivation with glass layers
- E. Photolithography structured platinum thin film
- F. Ceramic substrate

Design and construction of the Rosemount Series 68 Platinum Sensors provides the optimum combination of accuracy and durability available for temperature measurements. The construction of the sensor allows for direct immersion in non-corrosive fluids at reasonable static pressures. For corrosive environments or many industrial applications, these sensors are widely used with standard thermowell assemblies.

## Platinum element and lead wire configurations

Single-element temperature sensors have four lead wires and may be used in 2-, 3-, and 4-wire signal conditioning systems.

## Specifications

### Performance specifications

#### Temperature range

-50 to 400 °C (-58 to 752 °F)

#### Effect of temperature cycling

±0.05 percent (0.13 °C or 0.23 °F) maximum ice-point resistance shift following 10 cycles over the specified temperature range

#### Stability

±0.11 percent 0.28 °C or 0.51 °F maximum ice-point resistance shift following 1,000 hours at maximum specified temperature (400 °C)

#### Maximum hysteresis

±0.1 percent of operating temperature range

#### Time constant

12 seconds maximum required to reach 63.2 percent sensor response in water flowing at 3 ft/s (0.91 m/s)

#### Nominal R0 100 Ohm

Nominal alpha 0.00385  $\Omega/\Omega^{\circ}\text{C}$

### Physical specifications

#### Material selection

Emerson provides a variety of Rosemount product with various product options and configurations including materials of construction that can be expected to perform well in a wide range of applications. The Rosemount product information presented is intended as a guide for the purchaser to make an appropriate selection for the application. It is the purchaser's sole responsibility to make a careful analysis of all process parameters (such as all chemical components, temperature, pressure, flow rate, abrasives, contaminants, etc.), when specifying product, materials, options and components for the particular application. Emerson is not in a position to evaluate or guarantee the compatibility of the process fluid or other process parameters with the product, options, configuration or materials of construction selected.

#### Sheath material

316 SST and 321 SST

#### Lead wire

PTFE-insulated, silver plated, 24-gauge stranded copper wire

#### Identification data

The model, serial numbers, and up to six lines of permanent tagging information are etched on each sensor adapter. Stainless steel tags are available upon request.

### Environmental specifications

#### Humidity limits

Lead seal can withstand 100 percent relative humidity

**Vibration limits**

±0.05 percent maximum ice-point resistance shift due to 30 minutes of 14 g peak vibration from 5 to 350 Hz at 20 °C (68 °F) for unsupported stem length of less than 6-in.

**Quality assurance**

Each sensor is subjected to a resistance accuracy test at 0 °C and an insulation resistance test

**Enclosure ratings**

When installed properly, Rosemount Series 68 sensors are suitable for indoor and outdoor NEMA® 4X and CSA Enclosure Type 4X installations. See [Hazardous area approvals](#) for complete installation information

**Insulation resistance**

1000 × 10<sup>6</sup> ohms minimum insulation resistance when measured at 500 Vdc at room temperature

## Rosemount Series 78 Platinum RTD

Rosemount Series 78 Sensors are intended for applications that require high accuracy, dual-elements, and/or are subjected to high temperatures. Rosemount Series 78 Platinum Resistance Temperature Sensors measure from –200 to 500 °C (–328 to 932 °F). These sensors are available in capsule, general-purpose, and spring-loaded in sensor (X) lengths from 1- to 68-in. They are also available bayonet spring-loaded style in sensor (X) lengths from 1- to 45-in.

Table 5 shows the interchangeability of the Rosemount Series 78 Pt100-385 Sensors. The performance of the standard Series 78 Sensor conforms to the standard set by IEC 751 Class B. Additionally, IEC-751 Class A accuracy is available as an option. For maximum system accuracy, Emerson can provide sensor calibration. See [Sensor characterization \(calibration\) schedules– option code V](#). Emerson also offers optional sensor-to-transmitter matching capability obtainable through the use of Callendar-Van Dusen Constants. See [Figure 30](#).


The wire-wound design and construction of the general-purpose Rosemount Series 78 Sensor allows direct immersion in non-corrosive fluids at reasonable static pressures. For corrosive environments and in many industrial applications, these sensors are commonly used with standard thermowell assemblies.

### Platinum element and lead wire configurations


Single-element high-temperature sensors have four lead wires and may be used in 2-, 3-, and 4-wire signal conditioning systems.

Dual-element sensors have redundant elements to provide separate readout and control signals from a single measurement point. Dual-element sensors have three lead wires for each element and may be used with 2- or 3-wire systems.

**Figure 19: Lead Wire Configuration**

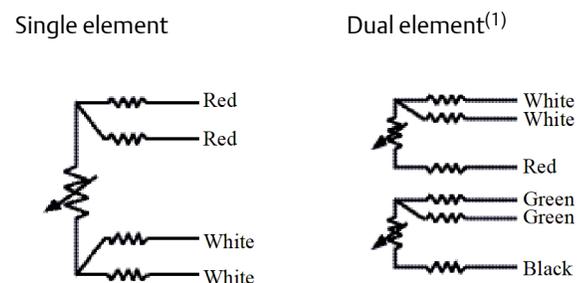

(1) Dual element sensors are only available on Rosemount Series 68Q and 78 Sensors.

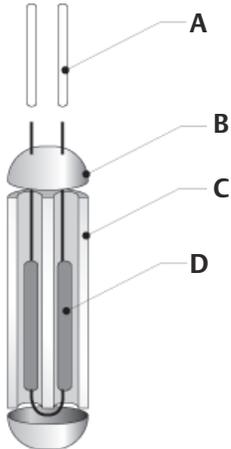**Figure 20: Construction of a Platinum Wire-Wound RTD**

- A. Lead wires
- B. Seal
- C. High purity insulator
- D. Platinum resistance element

## Specifications

### Performance specifications

#### Temperature range

Rosemount Series 78 single- and dual-element sensors may be used in temperatures from  $-200$  to  $500$  °C ( $-328$  to  $932$  °F).

#### Effect of temperature cycling

$\pm 0.04$  percent ( $0.10$  °C or  $0.18$  °F) maximum ice-point resistance shift following 10 cycles between  $-200$  and  $500$  °C ( $-328$  to  $932$  °F).

#### Stability

$\pm 0.05$  percent maximum ice-point resistance shift following 1,000 hours at  $400$  °C ( $752$  °F).

**Table 5: Rosemount Series 78 Interchangeability**

Both tolerances valid from  $-200$  to  $500$  °C.

Standard series 78 IEC-751 Class B	Temperature
$\pm 0.80$ °C ( $\pm 1.44$ °F)	$-100$ °C ( $-148$ °F)
$\pm 0.30$ °C ( $\pm 0.54$ °F)	$0$ °C ( $32$ °F)
$\pm 0.80$ °C ( $\pm 1.44$ °F)	$100$ °C ( $212$ °F)
$\pm 1.80$ °C ( $\pm 3.24$ °F)	$300$ °C ( $572$ °F)
$\pm 2.30$ °C ( $\pm 4.14$ °F)	$400$ °C ( $752$ °F)
Series 78 with IEC-751 Class A option	Temperature
$\pm 0.35$ °C ( $\pm 0.63$ °F)	$-100$ °C ( $-148$ °F)
$\pm 0.15$ °C ( $\pm 0.27$ °F)	$0$ °C ( $32$ °F)

**Table 5: Rosemount Series 78 Interchangeability**  
(continued)

±0.35 °C (±0.63 °F)	100 °C (212 °F)
±0.75 °C (±1.35 °F)	300 °C (572 °F)
±0.95 °C (±1.71 °F)	400 °C (752 °F)

### Maximum hysteresis

Single- and dual-element, Nominal R0 100 Ohm Nominal alpha 0.00385 Ω/Ω °C: ±0.04 percent of range

### Time constant

4 seconds maximum required to reach 63.2 percent sensor response in water flowing at 3 ft/s (0.91 m/s).

### Self heating

18 mW minimum power dissipation required to cause a 1 °C (1.8 °F) temperature measurement error in water flowing at 3 ft/s.

### Insulation resistance

500 × 10<sup>6</sup> ohms minimum insulation resistance when measured at 500 Vdc at room temperature (20 °C [68 °F]).

## Environmental specifications

### Humidity limits

Lead seal is capable of withstanding 100 percent relative humidity.

### Vibration limits

Standard single- and dual-element sensors

±0.03 percent maximum ice-point resistance shift due to 30 minutes of 21 g peak vibration from 5 to 350 Hz continuous sweep at 20 °C (68 °F) for unsupported stem length of less than 5.5-in. (140 mm).

### Quality assurance

Each sensor is subjected to a resistance accuracy test at 0 °C and an insulation resistance test.

### Enclosure ratings

When installed properly, Rosemount Series 78 Sensors are suitable for indoor and outdoor NEMA 4X and CSA Enclosure Type 4X installations. See [Hazardous area approvals](#) for complete installation information.

## Physical specifications

### Sheath material

Single and dual-element, 316 SST

### Lead wires

Single and dual-element, PTFE-insulated, nickel-coated, 22-gauge stranded copper wire.

### Identification data

The model and serial numbers and up to six lines of permanent tagging information are etched on each sensor adapter. Stainless steel tags are available upon request.

# Rosemount Series 183 Thermocouple


Rosemount Series 183 Thermocouple Sensors measure from  $-180$  to  $1150$  °C ( $-292$  to  $2102$  °F).

## Construction


The Rosemount Series 183 Thermocouples are manufactured using Type J, K, E, or T wire with “special limits of error” accuracy. The junction of these wires is fusion-welded to form a pure joint, to maintain the integrity of the circuit, and to ensure the highest accuracy. Grounded junctions are available for improved response time and good thermal contact with protection from the environment. The ungrounded and isolated junctions provide electrical isolation from the sensor sheath (see [Figure 21](#)).

Rosemount thermocouples are encased in a protective metal sheath. The sheath material is 304 SST for types J, E, and T, used at temperatures up to  $871$  °C ( $1600$  °F) and Inconel for type K, used at temperatures up to  $1150$  °C ( $2102$  °F). Metallic oxide insulation is compacted into the sheath to mechanically support and electrically insulate the thermocouple wire. See [Table 6](#) for more information on the different types of thermocouples.

**Figure 21: Rosemount Series 183 Junction Configurations**

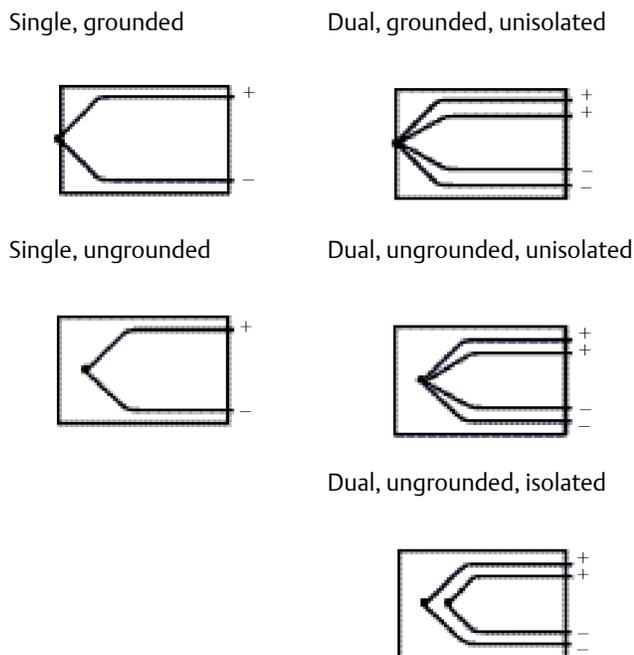

**Figure 22: Rosemount Series 183 Lead Wire Configurations**

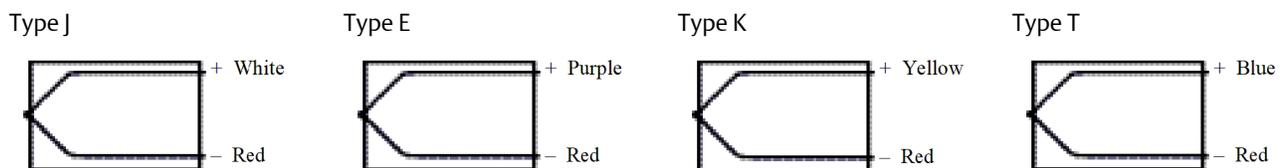

## Specifications

### Performance Specifications

The thermoelectric current relationship in a thermocouple is standardized and defined by ASTM E-230. All Rosemount Series 183 Thermocouples conform to these standards with “special limits of error” accuracy. The particular characteristics of each ISA type thermocouple are outlined in [Table 6](#).

### Physical specifications

#### Sheath material

304 SST for types J, E, and T (used at temperatures up to 871 °C). Inconel for type K (used at temperatures up to 1150 °C).

#### Lead wires

Thermocouple, external lead wires—20 AWG wire, PTFE-insulated. Color coded per lead wire configuration schematic shown in [Figure 22](#).

#### Identification data

The model and serial numbers and up to six lines of permanent tagging information are etched on each sensor adapter. Stainless steel tags are available upon request.


#### Insulation resistance

100 × 10<sup>6</sup> ohms minimum insulation resistance when measured at 100 Vdc at room temperature.

#### Enclosure ratings

When installed properly, Rosemount Series 183 Sensors are suitable for indoor and outdoor NEMA 4X and installations. See [Hazardous area approvals](#) for complete installation information.

**Figure 23: Comparison of Thermocouples**

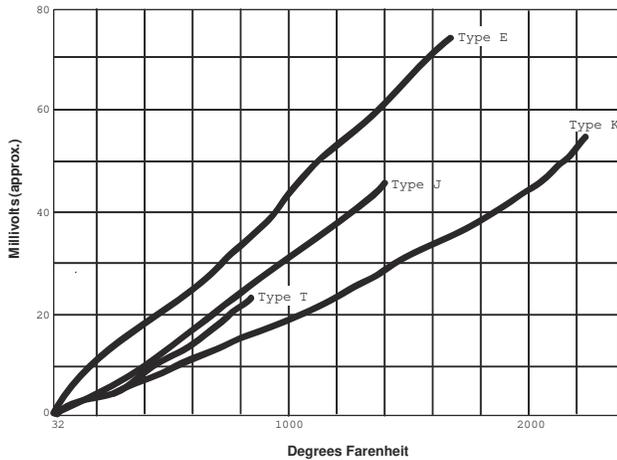

Thermocouple	Conditions for use
Type J Iron/Constantan	Maximum operating temperature of 760 °C (1400 °F). Used with or without protective tubing where deficiency of free oxygen exists. Protective tube not essential, but desirable for cleanliness and longer service.
Type K Chromel/Alumel	Suitable for extended use in temperatures reaching 1150 °C (2102 °F). Use of metal or ceramic protective tube desirable, especially in reducing atmospheres. In oxidizing atmospheres, protective tubing necessary only to promote cleanliness and longer service.
Type E Chromel/Constantan	Suitable for use at temperature up to 871 °C (1600 °F) in vacuum or inert, mildly oxidizing, or reducing atmosphere. Not subject to corrosion at cryogenic temperatures. Has highest EMF output per degree of all commonly used thermocouples.
Type T Copper/Constantan	Operating temperature range of -180 to 371 °C (-292 to 700 °F). Use in either oxidizing or reducing atmospheres. Protective tubing necessary only to promote cleanliness and longer service. Stable at lower temperature. Superior for a wide variety of uses in cryogenic temperatures.

Table 6: Characteristics of Series 183 Thermocouple Types

ISA thermocouple types	Thermocouple wire alloys	Temperature range		Limits of error (interchangeability)
		°C	°F	
J	Iron/Constantan	0 to 760	32 to 1400	±1.1 °C (2.0 °F) or ±0.4% of measured temperature, whichever is greater
K	Chromel/Alumel	0 to 1150	32 to 2102	±1.1 °C (2.0 °F) or ±0.4% of measured temperature, whichever is greater
E	Chromel/Constantan	0 to 871	32 to 1600	±1.0 °C (1.8 °F) or ±0.4% of measured temperature, whichever is greater
T	Copper/Constantan	-180 to 0	-292 to 32	±1.0 °C (1.8 °F) or ±1.5% of measured temperature, whichever is greater
		0 to 371	32 to 700	±0.5 °C (1.0 °F) or ±0.4% of measured temperature, whichever is greater

## Rosemount Series 68Q Sanitary Platinum RTD

Rosemount Series 68Q Sanitary RTD Temperature Sensors measure from  $-50$  to  $200$  °C ( $-58$  to  $392$  °F). These sensors are available in Tri Clamp endcap designs in immersion lengths from 1.0 to 9.5-in. [Table 7](#) shows the interchangeability of the Rosemount Series 68Q Sensor.

### Accuracy

**Table 7: Rosemount Series 68Q Interchangeability (IEC 751 Class B)**

$\pm 0.55$ °C ( $\pm 0.99$ °F) at $-50$ °C ( $-58$ °F)
$\pm 0.30$ °C ( $\pm 0.54$ °F) at $0$ °C ( $32$ °F)
$\pm 0.80$ °C ( $\pm 1.44$ °F) at $100$ °C ( $212$ °F)
$\pm 1.30$ °C ( $\pm 2.34$ °F) at $200$ °C ( $392$ °F)

### Construction

Rosemount Series 68Q Sensors conform to 3A<sup>®</sup> Sanitary Standards and feature product contact surfaces designed for CIP cleaning. The response times of Series 68Q Sensors meet the Grade A Pasteurized Milk Ordinance (PMO) specification for thermometric response of an indicating thermometer on a pipeline.

Rosemount Series 68Q Sensors are offered in a Tri Clamp sanitary endcap configuration. The sensor capsule is welded into the 316 SST sanitary endcap/stem assembly. The product contact of this assembly is polished to a finish that exceeds number 4 minimum finish as required by the 3A Sanitary Council Standard #74-02.

### Platinum element and lead wire configurations

Single-element temperature sensors have four lead wires and may be used in 2-, 3-, and 4-wire signal conditioning systems. Dual-element sensors have six lead wires and may be used in 2- and 3-wire signal conditioning systems.

### Specifications

#### Performance specifications

##### Temperature range

$-50$  to  $200$  °C ( $-58$  to  $392$  °F)

##### Maximum hysteresis

$\pm 0.09$  percent of operating temperature range

##### Stability

Tri Clamp O.D. tube size 1-in. and greater

$\pm 0.04$  percent maximum ice-point resistance shift following 1,000 hours at maximum specified temperature  $392$  °F ( $200$  °C)

Tri Clamp O.D. tube size  $\frac{1}{2}$ - to  $\frac{3}{4}$ -in.

$\pm 0.08$  percent maximum ice-point resistance shift following 1,000 hours at maximum specified temperature  $392$  °F ( $200$  °C)

**Response time**

Tri Clamp O.D. tube size 1-in. and greater

Less than 3.5 seconds required to reach 63.2 percent sensor response in water flowing at 3 ft/s (0.91 m/s). Meets PMO specification.

Tri Clamp O.D. tube size ½- to ¾-in.

Less than 1.5 seconds required to reach 63.2 percent sensor response in water flowing at 3 ft/s (0.91 m/s).

**Insulation Resistance**

500 × 10<sup>6</sup> ohms minimum insulation resistance when measured at 100 Vdc at room temperature

**Surface Finish**

32R<sub>A</sub> standard finish on product contact surfaces. Meets 3A requirements.

15R<sub>A</sub> high mechanical polish available with option code HP.

**Environmental specifications****Humidity limits**

Lead seal is capable of withstanding 100 percent relative humidity.

**Quality assurance**

Each sensor is subjected to a resistance accuracy test at 0 °C.

**Physical specifications****Sheath material**

316L SST

**Lead wire**

PTFE-insulated, nickel-coated, 24-gauge stranded copper wire


**Identification data**

The model and serial numbers and up to six lines of permanent tagging information are etched on each sensor adapter. Stainless steel tags are available upon request.


### Dimensional drawings

**Figure 24: Rosemount 68Q Sanitary Sensor with Tri Clamp Endcap**

Stepped stem

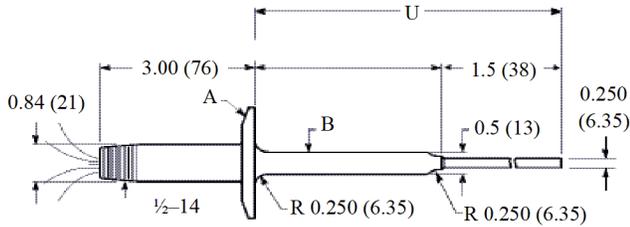


Straight stem

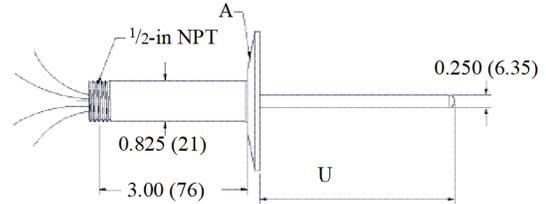

- A. Tri clamp endcap
- B. Stem
- C. Tri Clamp process connection 1- to 3-in. O.D. tube size

Dimensions are in inches (millimeters).


**Figure 25: Rosemount 68Q Mini General Purpose Sensor with Cable and Strain Relief**

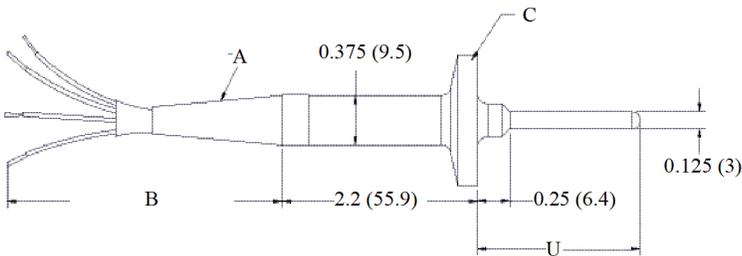

- A. Vinyl strain relief
- B. Lead wire length
- C. Tri Clamp process connection 1/2- to 3/4-in O.D. tube size

Dimensions are in inches (millimeters).


**Figure 26: Rosemount 68Q Mini General Purpose Sensor with 1/2-in. NPT Threaded Adapter**

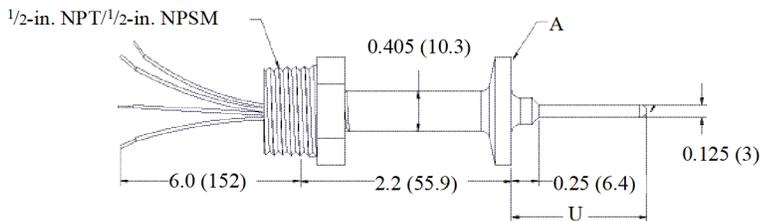

- A. Tri Clamp process connection 1/2- to 3/4-in. O.D. tube size

Dimensions are in inches (millimeters).

**Figure 27: Rosemount 68Q Mini Spring-loaded Sensor with Thermowell and Replaceable Sensor**

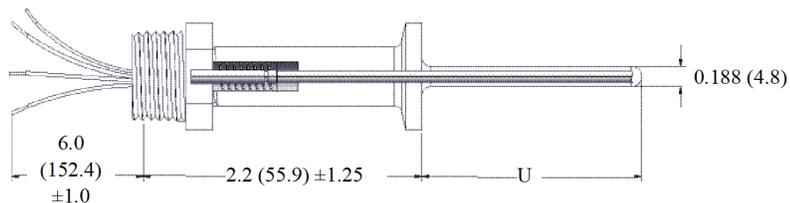

Dimensions are in inches (millimeters).

**Table 8: Rosemount Series 68Q Spare Parts List**

Mini spring-loaded sanitary replacement sensors and thermowells		
Immersion length (U)	Replacement sensor part number	Replacement thermowell part number
2.0	00068-4035-0020	00068-4035-1020
2.5	00068-4035-0025	00068-4035-1025
3.0	00068-4035-0030	00068-4035-1030

## Rosemount Series 58C Platinum RTD

Rosemount Series 58C Sensors are available in 12-, 24-, 36-, and 48-in. (X) lengths and may be shortened to any desired length with an ordinary tube cutter. This cut-to-fit feature eliminates the need to stock a large selection of sensors in many specific lengths.

[Table 9](#) shows the interchangeability of the Series 58C Sensor.

**Table 9: Series 58C Interchangeability (IEC 751 Class B)**

$\pm 0.55$ °C ( $\pm 0.99$ °F) at $-50$ °C ( $-58$ °F)
$\pm 0.30$ °C ( $\pm 0.54$ °F) at $0$ °C ( $32$ °F)
$\pm 0.80$ °C ( $\pm 1.44$ °F) at $100$ °C ( $212$ °F)
$\pm 1.30$ °C ( $\pm 2.34$ °F) at $200$ °C ( $392$ °F)

### Specifications

#### Performance specifications

##### Temperature range

$-50$  to  $200$  °C ( $-58$  to  $392$  °F)

##### Maximum hysteresis

$\pm 0.09$  percent of operating temperature range

##### Stability

$\pm 0.035$  percent maximum ice-point resistance shift following 1,000 hours at maximum specified temperature  $200$  °C ( $392$  °F)

##### Insulation resistance

$500 \times 10^6$  ohms minimum insulation resistance when measured at 50 Vdc at room temperature

#### Environmental specifications

##### Humidity limits

No permanent rear seal is installed.

##### Quality assurance

Each sensor is subjected to a resistance accuracy test at  $0$  °C ( $32$  °F) and an insulation resistance test.

#### Physical specifications

##### Sheath material


316 SST

##### Lead wires

PTFE-insulated, nickel-coated, 24-gauge stranded copper wire

## Dimensional drawings



Figure 28: Rosemount Series 58C Sensor

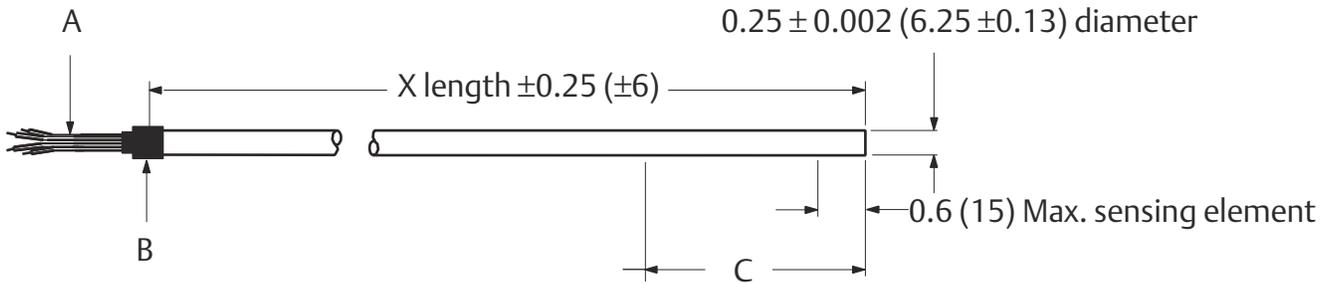

- A. Four lead wires 6-in. (152 mm) long
- B. Nylon sleeve
- C. Do not cut or bend sheath within 2 (51)<sup>(2)</sup>

Option code SNN spring-loaded Fitting 303 SST. 1/2-14 ANPT

Option codes C01, C02, Swagelok® compression fitting 316 SST. 1/4-14 ANPT

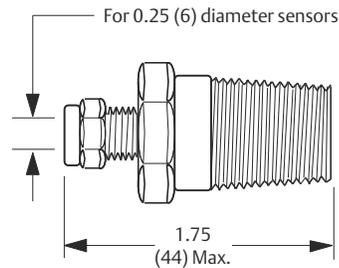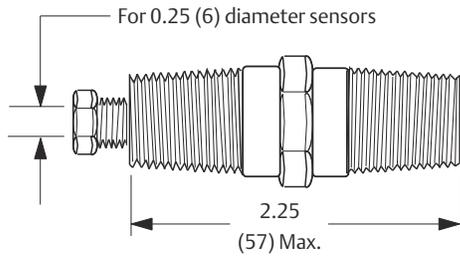

Dimensions are in inches (millimeters).

(2) Do not cut all the way through the sensor sheath when cutting the sensor to length. Damage to the sensor wires could result. To prevent damage to the sensor wires, score the sheath considerably with a tube cutter and gently break off the excess.

# Calibration

## Calibration options

Sensor calibration may be required for input to quality systems, or for control system enhancement. More frequently, it is used to improve the overall temperature measurement performance by matching the sensor to a temperature transmitter.

Transmitter-sensor matching is available for RTD sensors used with Rosemount Temperature Transmitters where the inherent stability and repeatability of the RTD technology is well established.

### Transmitter-sensor matching using Callendar-Van Dusen constants

Significant temperature measurement accuracy improvement can be attained using a temperature sensor that is matched to a temperature transmitter. This matching process entails teaching the temperature transmitter the relationship between resistance and temperature for a specific RTD sensor. This relationship, approximated by the Callendar-Van Dusen equation, is described as:

$$R_t = R_0 + R_0\alpha[t - \delta(0.01t - 1)(0.01t) - \beta(0.01t - 1)(0.01t)^3],$$

where:

$R_t$  = Resistance (ohms) at Temperature  $t$  (°C)

$R_0$  = Sensor-Specific Constant (Resistance at  $t = 0$  °C)

$\alpha$  = Sensor-Specific Constant

$\delta$  = Sensor-Specific Constant

$\beta$  = Sensor-Specific Constant (0 at  $t > 0$  °C, 0.11 at  $t < 0$  °C)

The exact values for  $R_0$ ,  $\alpha$ ,  $\delta$ ,  $\beta$ , – known as Callendar-Van Dusen (CVD) constants – are specific to each RTD sensor, and are established by testing each individual sensor at various temperatures.

The calibration temperature values using the CVD equation are divided into two major temperature areas: above 0 °C and below 0 °C. The calibration for the temperature range between 0 and 660 °C is obtained from the following formula:

$$R_t = R_0 \left\{ 1 + a \left[ t - d \left( \frac{t}{100} \right) \left( \frac{t}{100} - 1 \right) \right] \right\}$$

---

#### Note

This is a modification of the fourth-order CVD equation where  $b = 0$  for temperatures greater than 0 °C. Since this modified equation is a second-order degree equation, at least three distinct temperature values are needed in order to curve fit the behavior of the RTD. For the temperature range from 0 to 100 °C, only these two end points are used, and an approximation is made to render the constants.

---

Once the sensor-specific constants are entered, the transmitter uses them to generate a custom curve to best describe the relationship between resistance and temperature for the particular sensor and transmitter system. Matching a Rosemount Series 68 or 78 RTD Sensor to a Rosemount Transmitter typically results in a 3- or 4-fold improvement in temperature measurement accuracy for the total system. This substantial system accuracy improvement is realized as a result of the transmitter's ability to use the sensor's actual resistance-vs.-temperature curve instead of an ideal curve.

An example of the benefits of using the sensor matching capability of a Rosemount 3144P Temperature Transmitter along with a matched Rosemount Series 68 RTD Sensor are shown in [Typical transmitter-sensor matching uncertainty improvements](#).

### Calibration uncertainty

Calibration uncertainties of the lab are equal to or better than 1/10 IEC 751 Class B interchangeability:

$$\text{Uncertainty} = 0.03 + 0.0005x|t|$$

$$|t| = \text{absolute value of temperature in } ^\circ\text{C}$$

## Typical transmitter-sensor matching uncertainty improvements

Transmitter: Rosemount 3144 (has built-in sensor matching capabilities), span of one to 200 °C, accuracy = 0.1 °C)

Sensor: Rosemount Series 68 RTD


Callendar van Dusen Option: V2

Process Temperature: 150 °C

Temperature		Sensor interchangeability error		Total calibrated sensor uncertainty <sup>(1)</sup>	
°C	°F	°C	°F	°C	°F
0	32	±0.30	±0.54	±0.10	±0.18
50	122	±0.55	±0.99	±0.17	±0.31
100	212	±0.80	±1.44	±0.22	±0.40
150	302	±1.05	±1.89	±0.18	±0.32
200	392	±1.30	±2.34	±0.16	±0.29

(1) Includes calibration uncertainties of the lab, hysteresis, and repeatability.

System Uncertainty Comparison at 150 °C:

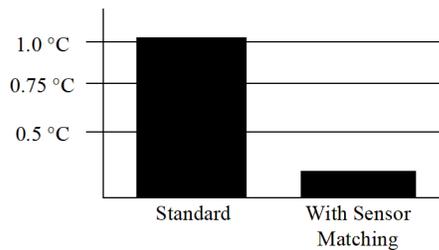

### Rosemount Standard 68 Sensor

Rosemount 3144: ± 0.10 °C

Rosemount Standard Series 68 RTD: ± 1.05 °C

Total system<sup>(1)</sup>: ± 1.05 °C

### Rosemount 68 Sensor with V2 option

Rosemount 3144: ± 0.10 °C

Rosemount Standard Series 68 RTD: ± 0.18 °C

Total system<sup>(1)</sup>: ± 0.21 °C

(1) Calculated using RSS statistical method:

$$\text{SystemAccuracy} = \sqrt{(\text{TransmitterAccuracy})^2 + (\text{SensorAccuracy})^2}$$

## Ordering information

### Sensor characterization (calibration) schedules– option code V

Rosemount Series 68, 68Q, and 78 RTD sensors can be ordered with an option (V1, V2,...V7, see [Table 10](#)), that provides Callendar-Van Dusen constants that are shipped with the sensor. When you order this option, the values of all four sensor-specific constants are physically attached to each sensor with a wire-on tag. Rosemount Transmitters have a unique, built-in sensor matching capability. To use this capability, the four sensor-specific constants are programmed into the transmitter at the factory by ordering a C2 option on the transmitter, or easily entered and changed in the field using a Field Communicator or AMS Device Manager. When these values are entered into a Rosemount Transmitter, the sensor and transmitter become matched.

Each “V” option is specific to a particular temperature range for a given sensor type (see [Table 10](#)).

For applications requiring the increased accuracy obtainable through a matched sensor and transmitter, order the appropriate “V” option (see [Table 10](#)). To ensure optimal performance, select a “V” option such that the sensor’s range of actual operation is between the minimum and maximum calibration points.

**Note**


An RTD ordered with the V option is shipped with CVD constants only; it does not include calibration tables.

**Table 10: Option Code “V” Callendar-van Dusen Constants**

Option code	Temperature range		Calibration points	
	Min	Max	Min	Max
V1	0 to 100	32 to 212	0	32
			100	212
V2	0 to 200	32 to 392	0	32
			100	212
V3	0 to 400	32 to 752	200	392
			0	32
			200	392
			400	752
V5	-50 to 100	-58 to 212	0	32
			100	212
V6	-50 to 200	-58 to 392	-50	-58
			0	32
			100	212
			200	392
V7	-50 to 400	-58 to 752	-50	-58
			0	32
			200	392
			400	752


**Table 11: Ordering Information**

Specify sensor model number with “V” option example								
Sensor model	0068	N	11	N	00	N	120	V2

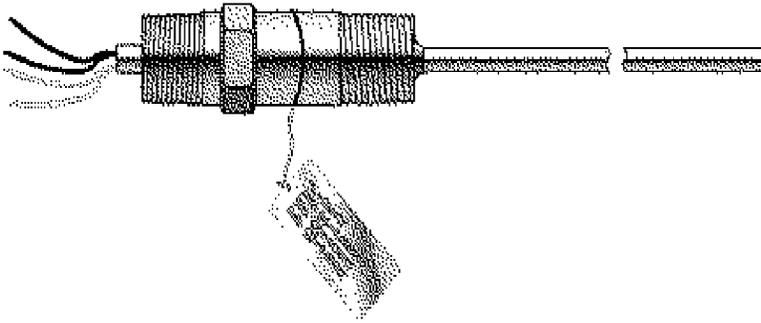**Figure 29: Typical Sensor Ordered with Option Code V**

### Option code X8Q4

The X8Q4 option calibrates the sensor to a customer-specified temperature range. The exact range that the sensor is calibrated to is based on the calibration schedules available. At a minimum, the sensor calibration will encompass the requested calibration range. The X8Q4 report includes the Callendar-Van Dusen (CVD) constants ( $R_0$ ,  $a$ ,  $d$ ,  $b$ ), a resistance-versus-temperature table in one-degree increments, and a graph which includes the maximum errors due to the uncertainty of the calibration equipment, hysteresis, and repeatability. The values in the tables are calculated using Callendar-Van Dusen methodology. Two of the values on this table could be used to perform a two-point trim. The X8Q4 option also provides the CVD constants on a stainless steel tag attached to the sensor.

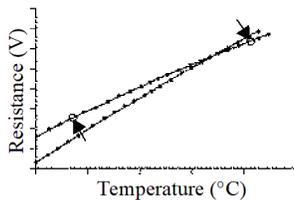**Figure 30: Typical Two-Point Trim**

A two-point trim shifts the ideal curve up or down, and changes the slope based on the two characterized points.

### Option X8Q4: Sensor Calibrated to a Customer-Specified Temperature Range

When you order an RTD with the X8Q4 option, you must specify a temperature range over which the sensor is to be calibrated. Before specifying the range, take careful note of the sensor temperature limits.

**Table 12: Ordering Example**

Typical model number	Model	Lead wire termination	Sensor type	Extension type	Extension length	Thermowell material	Immersion length	Additional options
	0068	N	11	N	00	N	045	X8Q4 X8X9Q4

If X8Q4 and X9Q4 are both required, do not repeat the “Q4” code in the model string. Include the following instead:

Calibrate from –10 to 120 °C


### Option code X9Q4

The X9Q4 option calibrates the sensor at a single customer-specified point. A calibration certificate with the resistance value at this point is supplied. This value could be used to perform a one-point trim on the transmitter. All characterizations are traceable to the National Institute of Standards and Technology (NIST). The calibration table is dated and marked with the sensor series and serial number.

**Note**

The X9Q4 option can be ordered and used in conjunction with the X8Q4 option.

**Figure 31: Graph of a Typical One-Point Trim**

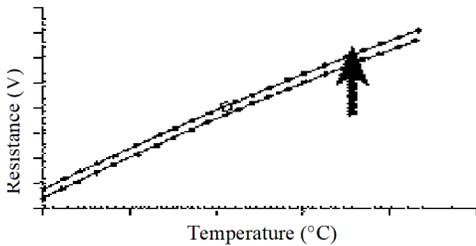

A one-point trim shifts the ideal curve up or down based on the single characterized point.

**Option X9Q4: Sensor calibrated to a customer-specified single point**

When you order an RTD with the X9Q4 option, you must specify a single temperature point at which the sensor is to be calibrated. Before specifying the point, take careful note of the sensor temperature limits.

**Table 13: Ordering Example**

Typical model number	Model	Lead wire termination	Sensor type	Extension type	Extension length	Thermowell material	Immersion length	Additional options
	0068	N	11	N	00	N	045	X9Q4

If X8Q4 and X9Q4 are both required, do not repeat the “Q4” code in the model string. Include the following instead:

X8X9Q4 Calibrate at 50 °C

**Table 14: Resistance vs. Temperature**

IEC 751 Platinum 100, $\alpha = 0.00385$ RTD											
°F	Ohms	°F	Ohms	°F	Ohms	°C	Ohms	°C	Ohms	°C	Ohms
-330	18.04	210	138.08	690	235.15	-200	18.52	90	134.71	380	240.18
-320	20.44	220	140.19	700	237.09	-190	22.83	100	138.51	390	243.64
-310	22.83	230	142.29	710	239.02	-180	27.10	110	142.29	400	247.09
-300	25.20	240	144.39	720	240.95	-170	31.34	120	146.07	410	250.53
-290	27.57	250	146.49	730	242.87	-160	35.54	130	149.83	420	253.96
-280	29.93	260	148.58	740	244.79	-150	39.72	140	153.58	430	257.38
-270	32.27	270	150.67	750	246.71	-140	43.88	150	157.33	440	260.78
-260	34.61	280	152.75	760	248.62	-130	48.00	160	161.05	450	264.18
-250	36.94	290	154.83	770	250.53	-120	52.11	170	164.77	460	267.56
-240	39.26	300	156.91	780	252.44	-110	56.19	180	168.48	470	270.93
-230	41.57	310	158.98	790	254.34	-100	60.26	190	172.17	480	274.29
-220	43.88	320	161.05	800	256.24	-90	64.30	200	175.86	490	277.64
-210	46.17	330	163.12	810	258.14	-80	68.33	210	179.53	500	280.98
-200	48.46	340	165.18	820	260.03	-70	72.33	220	183.17	510	284.30
-190	50.74	350	167.24	840	263.80	-60	76.33	230	186.84	520	287.62

Table 14: Resistance vs. Temperature (continued)

IEC 751 Platinum 100, $\alpha = 0.00385$ RTD											
°F	Ohms	°F	Ohms	°F	Ohms	°C	Ohms	°C	Ohms	°C	Ohms
-180	53.02	360	169.30	850	265.68	-50	80.31	240	190.47	530	290.92
-170	55.29	370	171.35	860	267.56	-40	84.27	250	194.10	540	294.21
-160	57.55	380	173.40	870	269.44	-30	88.22	260	197.71	550	297.49
-150	59.81	390	175.45	880	271.31	-20	92.16	270	201.31	560	300.74
-140	62.06	400	177.49	890	273.17	-10	96.09	280	204.90	570	304.01
-130	64.30	410	179.53	900	275.04	0	100.00	290	208.48	580	307.25
-120	66.54	420	181.56	910	276.90	10	103.90	300	212.05	590	310.49
-110	68.77	430	183.59	920	278.75	20	107.79	310	215.61	600	313.71
-100	71.00	380	173.40	930	280.61	30	111.67	320	219.15	N/A	N/A
-90	73.22	390	175.45	940	282.46	40	115.54	330	222.68	N/A	N/A
-80	75.44	400	177.49	950	284.30	50	119.40	340	226.21	N/A	N/A
-70	77.66	410	179.53	960	286.14	60	123.24	350	229.72	N/A	N/A
-60	79.86	420	181.56	970	287.98	70	127.08	360	233.21	N/A	N/A
-50	82.07	430	183.59	980	289.82	80	130.90	370	236.70	N/A	N/A
-40	84.27	450	187.65	990	291.65	<p><b>Note</b></p> <p>To convert from °C to °F: <math>[1.8 \times (°C)] + 32 = °F</math>            Example: <math>(1.8 \times 100) + 32 = 212 °F</math></p> <p>To convert from °F to °C: <math>0.556 [(°F) - 32] = 100 °F</math>            Example: <math>0.556 (212 - 32) = 100 °C</math></p>					
-30	86.47	460	189.67	1000	293.48						
-20	88.66	470	191.68	1010	295.30						
-10	90.85	480	193.70	1020	297.12						
0	93.03	490	195.71	1030	298.94						
10	95.21	500	197.71	1040	300.75						
20	97.39	510	199.71	1050	302.56						
30	99.57	520	201.71	1060	304.37						
40	101.74	530	203.71	1070	306.17						
50	103.90	540	205.70	1080	307.97						
60	106.07	550	207.69	1090	309.77						
70	108.23	560	209.67	1100	311.56						
80	110.38	570	211.66	1110	313.35						
90	112.53	580	213.63	1120	315.14						
100	114.68	590	215.61	N/A	N/A						
110	116.83	600	217.58	N/A	N/A						
120	118.97	610	219.55	N/A	N/A						
130	121.11	620	221.51	N/A	N/A						
140	123.24	630	223.47	N/A	N/A						
150	125.37	640	225.42	N/A	N/A						

**Table 14: Resistance vs. Temperature (continued)**

<b>IEC 751 Platinum 100, <math>\alpha = 0.00385</math> RTD</b>											
<b>°F</b>	<b>Ohms</b>	<b>°F</b>	<b>Ohms</b>	<b>°F</b>	<b>Ohms</b>	<b>°C</b>	<b>Ohms</b>	<b>°C</b>	<b>Ohms</b>	<b>°C</b>	<b>Ohms</b>
160	127.50	650	227.38	N/A	N/A						
170	129.62	660	229.33	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
180	131.74	670	231.27	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
190	133.86	680	233.21	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
200	135.97	N/A	N/A								

## Mounting accessories

### Rosemount Connection Head

The Rosemount Connection Head is for general-purpose and spring-loaded sensors. The terminal block has six terminals for either single or dual element sensors. If the sensor assembly is ordered assembled to a Rosemount 248 or 644H Head Mount Transmitter, then the terminal block is replaced by the transmitters.

#### Specifications

##### Sensor connection

½–14 ANPT mounting thread. Screw terminals for lead wire connections.

##### Electrical connection

½–14 ANPT conduit

##### Materials of construction

<b>Housing</b>	Low copper aluminum or stainless steel
<b>Paint</b>	Polyurethane (stainless steel not painted)
<b>Cover O-ring</b>	Buna-N

##### Enclosure rating

NEMA 4X, IP66, and IP68

### Polypropylene connection head

The polypropylene connection head is designed for use with sanitary sensors. It is FDA-compliant, and is resistant to attack by acids, alkalis, and organic solvents.

#### Specifications

##### Sensor connection

½–14 NPT mounting thread. Screw terminals for lead wire connections

##### Electrical connection

½–14 NPT conduit

##### Materials of construction

<b>Housing</b>	White polypropylene polymer
<b>O-ring seal</b>	Silicone rubber
<b>Terminals</b>	Nickel-plated brass

##### Temperature limits

–10 to 92 °C (14 to 198 °F)

## Connection head

The extended cover connection head provides the additional space required by sensors that have bayonet connectors. This model can also be used with general-purpose and spring-loaded sensors. The terminal block has six terminals for either single- or dual-element sensors.

The flat cover connection head is for general-purpose and spring-loaded sensors. The terminal block has six terminals for either single- or dual-element sensors.

## Specifications

### Sensor connection

½–14 ANPT mounting thread. Screw terminals for lead wire connections.

### Electrical connection

¾–14 ANPT conduit

### Materials of construction

<b>Housing</b>	Low-copper aluminum alloy
<b>O-ring seal</b>	Silicone rubber
<b>Terminals</b>	Nickel-plated brass

## Temperature limits

Head type	Unapproved	E5 option	E6 option	E1 option
Painted	–100 to 100 °C –148 to 212 °F	–50 to 85 °C –58 to 185 °F	–50 to 85 °C –58 to 185 °F	–40 to 65 °C –40 to 149 °F
Unpainted	–100 to 200 °C –148 to 392 °F	–50 to 85 °C –58 to 185 °F	–50 to 200 °C –58 to 392 °F	–40 to 65 °C –40 to 149 °F

### Enclosure ratings

When installed properly, painted connection heads are suitable for indoor and outdoor NEMA 4X installations. When installed properly, unpainted connection heads are suitable for NEMA 4 installations. See [Hazardous area approvals](#) for complete installation information.


### Connection head model numbers

Part Number	Description
00644-4410-0011	Rosemount connection head, painted aluminum
00644-4411-0011	Stainless steel, Rosemount connection head, standard cover, 1/2 ANPT × 1/2 ANPT
007903252003	Six terminals with flat cover, unapproved, unpainted
007903242003	Six terminals with extended cover, unapproved, unpainted
007903250002	Six terminals with flat cover, FM approved, unpainted
007903240002	Six terminals with extended cover, FM approved, unpainted
007903250003	Six terminals with flat cover, CSA approved, unpainted
007903240003	Six terminals with extended cover, CSA Approved, unpainted


Part Number	Description
007903252005	Six terminals with flat cover, unapproved, painted
007903242005	Six terminals with extended cover, unapproved, painted
007903250004	Six terminals with flat cover, FM approved, painted
007903240004	Six terminals with extended cover, FM approved, painted
007903250005	Six terminals with flat cover, CSA approved, painted
007903240005	Six terminals with extended cover, csa approved, painted
00644-4198-0011	No approval options, white polypropylene
00075-0003-3001	Round Terminal Block for Rosemount and Polypropylene heads
00644-4431-0001	External ground screw assembly for rosemount connection head
00644-4435-0011	Polypropylene connection head with terminal block ½-in. NPT entries
00079-0329-0001	Kit of 12 silicone rubber O-rings for flat/extended heads

Figure 32: Connection Head


Rosemount Connection Head

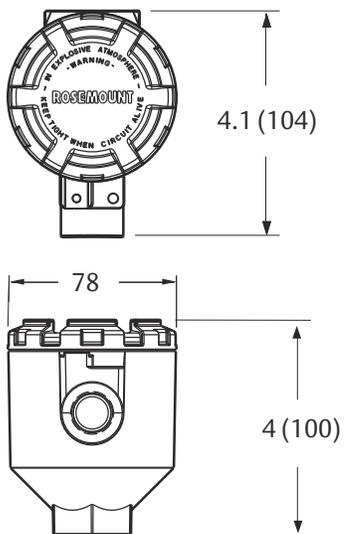

Polypropylene

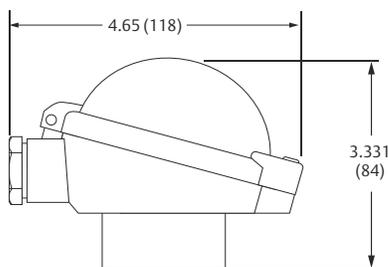

Flat cover      Extended cover      Terminal view

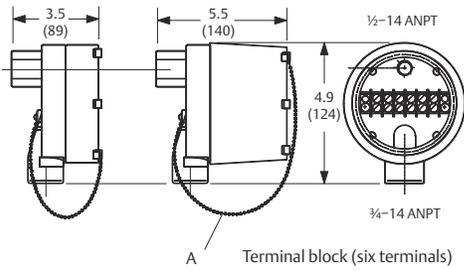

A. Chain


Dimensions are in inches (millimeters).

### Extension fitting assemblies

Extension fitting assemblies are available in:

- Coupling and nipple assembly
- Union and nipple assembly

Figure 33: Extension Fitting

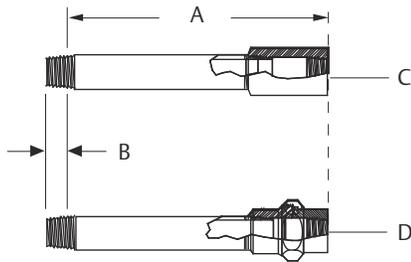

- A. Length (E) (nominal)
- B. 0.53 (13) Max. thread engagement (1/2-14 ANPT ref.)
- C. Coupling and nipple assembly
- D. Union and nipple assembly

Dimensions are in inches (millimeters).

Table 15: Extension

Coupling and nipple, SST		Union and nipple, SST	
Model number	Length (E)	Model number	Length (E)
007903540250	2.5-in.	007903550250	2.5-in.
007903540300	3.0-in. <sup>(1)</sup>	007903550300	3.0-in. <sup>(1)</sup>
007903540350	3.5-in.	007903550350	3.5-in.
007903540400	4.0-in.	007903550400	4.0-in.
007903540450	4.5-in.	007903550450	4.5-in.
007903540500	5.0-in.	007903550500	5.0-in.

Table 15: Extension (continued)


Coupling and nipple, SST		Union and nipple, SST	
Model number	Length (E)	Model number	Length (E)
007903540550	5.5-in.	007903550550	5.5-in.
007903540600	6.0-in. <sup>(1)</sup>	007903550600	6.0-in. <sup>(1)</sup>
007903540650	6.5-in.	007903550650	6.5-in.
007903540700	7.0-in.	007903550700	7.0-in.
007903540750	7.5-in.	007903550750	7.5-in.
007903540800	8.0-in.	007903550800	8.0-in.
007903540850	8.5-in.	007903550850	8.5-in.
007903540900	9.0-in.	007903550900	9.0-in.

(1) Standard configuration with best delivery. Also available for emergency requirements. Consult factory for information.

### Selecting an extension

Aside from ambient temperature variations, the heat from the process is transferred from the thermowell to the transmitter housing. If the process temperature is near or beyond specification limits, consider the use of additional thermowell lagging, an extension nipple, or a remote mounting configuration to isolate the transmitter from the excessive temperatures. Use Figure 34 and the corresponding example to determine an adequate extension length.

Figure 34: Rosemount 3144P Transmitter Housing Temperature Rise versus Extension Length for a Test Installation

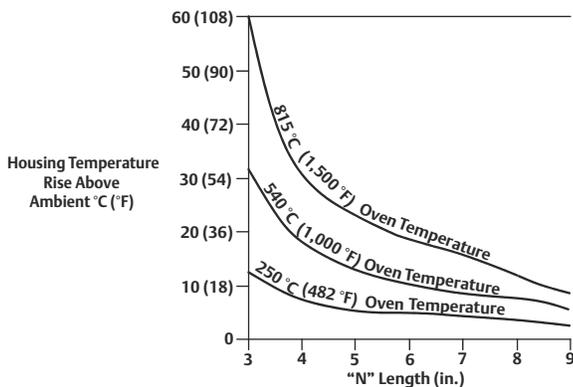

### Example


The rated ambient temperature specification is 85 °C. If the maximum ambient temperature is 40 °C and the process temperature to be measured is 540 °C, the maximum allowable housing temperature rise is the rated temperature specification limit minus the existing ambient temperature (85 – 40), or 45 °C.

As shown in Figure 34, an extension (E) dimension of 3.0-in. (76 mm) will result in a housing temperature rise of 30 °C. An “E” dimension of 3-in. would therefore be the minimum recommended length, and would provide a safety factor of about 15 °C. A longer “E” dimension, such as 6-in. (152 mm), would be desirable in order to reduce errors caused by transmitter temperature effect, although in that case the transmitter would probably require extra support. If a thermowell with lagging is used, the “E” dimension may be reduced by the length of the lagging.

## Mounting adapters for Rosemount Series 58, 68, 78, and 183

### M5–M7, sensor compression fittings, 316 SST

- For adjustable sensor length
- For low pressure applications (100 psig maximum)
- Fits ¼-in. diameter sensors
- Available with ⅛–27 (M5), ¼–18 (M6), and ½–14 (M7) ANPT process threads
- Not available on spring-loaded sensors

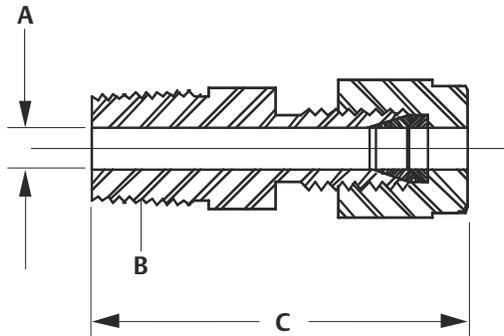

- A. Fitting diameter
- B. Sensor process thread
- C. Length


**Table 16: Compression Fittings, 316 SST (for Attachment to Capsule Stem)**

Model number	Option code	Sensor process thread	Fitting diameter		Length	
			in.	mm	in.	mm
C07961-0005	M5	⅛–27 ANPT	0.25	6.35	1.31	33.27
C07961-0006	M6	¼–18 ANPT	0.25	6.35	1.5	38.1
C07961-0008	M7	½–14 ANPT	0.25	6.35	1.75	44.45

## Lead wire extensions, connectors, and seals

The following options are available on most Rosemount Series 68 and 78 sensors. They are not available for use on Rosemount Series 58C, 68Q, and 183 sensors or with IECEx or ATEX Flameproof approval (option codes E7 or E1).

**Figure 35: Lead Wire Extension Options**

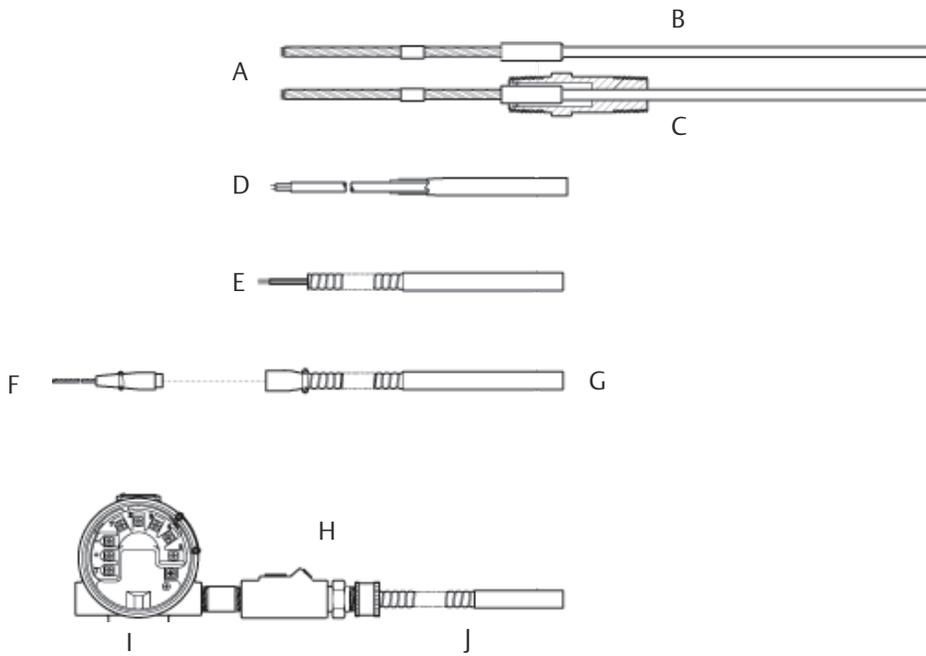


- A. Twisted lead wire extension (option codes A1–A8)
- B. Capsule sensor only
- C. Capsule sensor with standard adapter
- D. Shielded cable lead wire extension (option codes B1–B8)
- E. Armored cable lead wire extension (option codes C1–C8)
- F. Armored cable mating plug with lead wire extension (option codes L1–L8)
- G. Armored cable lead wire extension with electrical plug (option codes D1–D8)
- H. Moisture-proof seal assembly for armored cable (option J1)
- I. Rosemount 3144 Transmitter
- J. Armored cable lead wire extension (option codes C1–C8)

### A1–A8, twisted lead wire extension

- Lead wire connections are silver brazed and individually insulated by shrinkable PTFE tubes
- Withstands 95 percent relative humidity
- 200 °C (392 °F) maximum temperature
- Available with single or dual-element sensors

Option code	Y length (ft)	Option code	Y length (ft)
A1	1½	A5	24
A2	3	A6	50
A3	6	A7	75
A4	12	A8	100

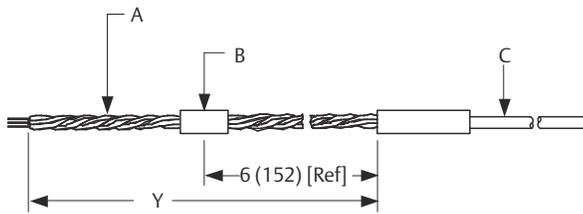


- A. 22-gauge PTFE lead wire
- B. PTFE
- C. Sensor

Dimensions are in inches (millimeters).

**B1–B8, shielded cable lead wire extension**

- Copper shielded cable prevents electrical noise distortions to sensor signal output
- Withstands 95 percent relative humidity
- 200 °C (392 °F) maximum temperature

Option code	Y length (ft)	Option code	Y length (ft)
B1	1½	B5	24
B2	3	B6	50
B3	6	B7	75
B4	12	B8	100

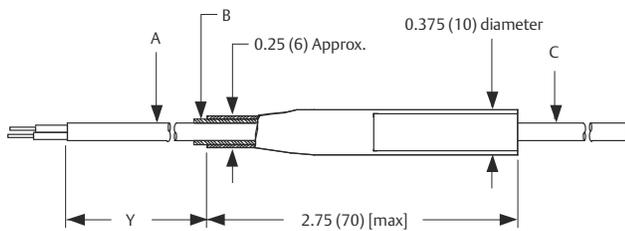


- A. Shielded cable PTFE jacket 22-Gauge PTFE-Insulated wires
- B. Rubber seal
- C. Sensor

Dimensions are in inches (millimeters).

**C1–C8, armored cable lead wire Extension**

- Provides lead wire protection in heavy duty environments
- Withstands 95 percent relative humidity
- 200 °C (392 °F) maximum temperature
- Available with single or dual-element sensors

Option code	Y length (ft)	Option code	Y length (ft)
C1	1½	C5	24
C2	3	C6	50
C3	6	C7	75
C4	12	C8	100

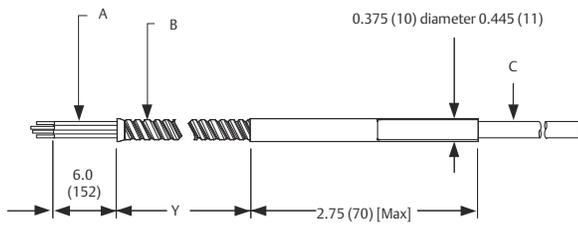


- A. 22-gauge PTFE-insulated wire
- B. Armor cable 0.34 (8.64) O.D.
- C. Sensor

Dimensions are in inches (millimeters).

**D1–D8, Armored cable lead wire extension with electrical plug**

- Provides lead wire protection in heavy-duty environments
- Provides quick-disconnect capability
- Withstands 95 percent relative humidity

Option code	Y length (ft)	Option code	Y length (ft)
D1	1½	D5	24
D2	3	D6	50
D3	6	D7	75
D4	12	D8	100

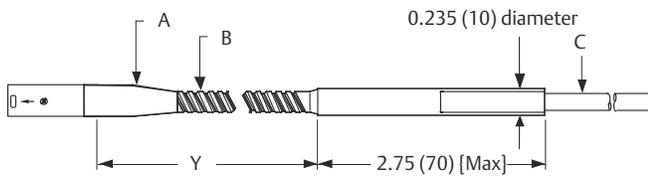


- A. Mates with option codes L1–L8
- B. Armor cable 0.34 (8.64) O.D.)
- C. Sensor

Dimensions are in inches (millimeters).

**L1–L8, armored cable mating plug with lead wire extension**

- Completes quick-disconnect capability for armored cable
- Withstands 95 percent relative humidity
- Twisted lead wire extension for lowest cost installation

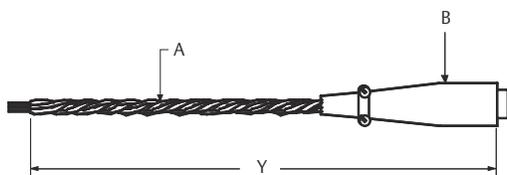


- A. 22-Gauge PTFE lead wire
- B. Mates with option codes D1–D8

Option code	Y length (ft)	Option code	Y length (ft)
L1	1½	L5	24
L2	3	L6	50
L3	6	L7	75
L4	12	L8	100

### J1, moisture-proof seal assembly for armored cable

- Prevents moisture migration through armored cable
- For use in humid environments but not for direct liquid immersion
- Non-disconnectable type assembly with armored cable and sensor

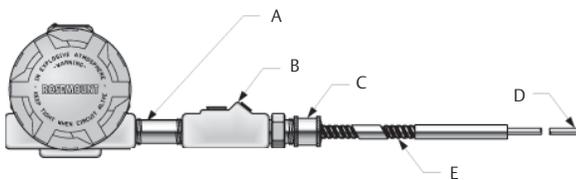

1. Nipple, 304 SST, ½–14 ANPT 1.12 (28.45)
2. Nipple, 304 SST, ½–14 ANPT 1.12 (28.45)
3. Compression fitting
4. Sensor
5. Armored cable lead wire (specify option codes C1–C8)

Dimensions are in inches (millimeters).

#### Note

Not available with FM or CSA explosion proof (options E5 or E6). Moisture-proof seal assembly must be ordered with armored cable lead wire extension (option codes C1–C8).

## Thermowells

### Materials

Rosemount Thermowells are supplied in most materials required for industrial applications. Standard materials are 316 SST, 304 SST, and C1018 carbon steel. For corrosive environments, special materials such as alloy and Inconel 600 are available. Consult factory for other material availability.

### Strength (pressure and flow vibration)

The strength of a thermowell depends on several parameters that relate thermowell construction to the installation environment. For most industrial applications, standard Rosemount thermowells provide the necessary strength if the material, style, and length are correct for the application. The proper selection of a thermowell depends on fluid type, temperature, pressure, and fluid velocity. It is important to note that most thermowell failures are caused by vibration that is induced by fluid flow. If static pressure strength is a major consideration, refer to [Table 16](#) for standard material ratings for a ½-in. tip. Tapered thermowells are offered for additional strength.

## Strength calculation

Emerson has the ability to perform thermowell frequency calculations to verify that the thermowell dimensions you provide are appropriate for your specific application. To take advantage of this calculation, fill out and return the Thermowell Calculation Configuration Data Sheet.

## Construction

All thermowell bodies with an overall length less than 42-in. are machined from solid bar stock to ensure water-tightness. Flange mounts are welded to the thermowell body. Standard construction provides immersion lengths (U) from 2½- to 48-in. with overall lengths (L) from 4- to 59-in. respectively. Thermowells with overall lengths larger than 36-in. may be a 3-piece welded construction. Consult the factory for more information on welded 3-piece construction thermowells.


## Identification data

The part number is etched on each thermowell. Additional tagging for specific customer requirements is available.

## Installation

For dimensional drawings of thread mounted, weld mounted, and flange mounted thermowells, refer to [Figure 37](#), [Figure 40](#), and [Figure 44](#).

**Figure 36: Thread Mounted Thermowells – Straight**

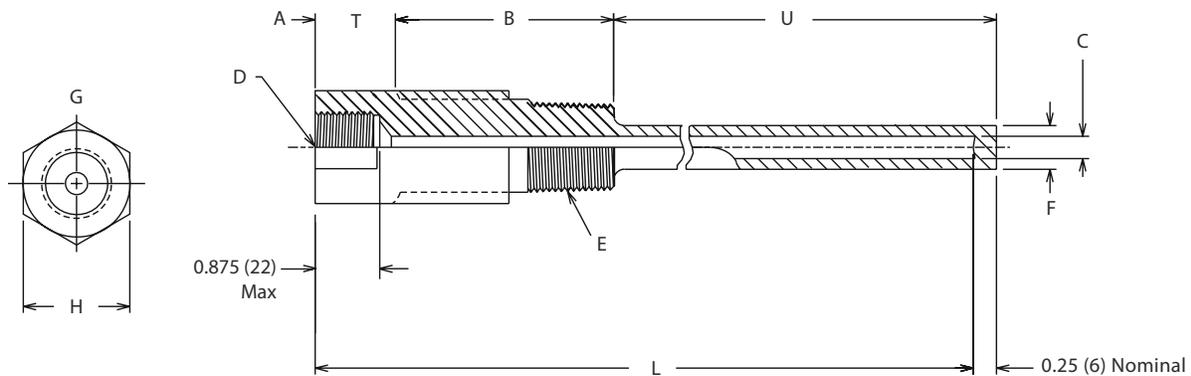


- A. Lagging extension, nominal
- B. Wrench and thread allowance 1.75 (44)
- C. Inside diameter 0.26 (7)
- D. ¼-14 NPSM
- E. Process mounting thread P
- F. Tip diameter A
- G. R37 option hex stock

Dimensions are in inches (millimeters).

### Note

½-14 ANPT threads are available.

**Figure 37: Thread Mounted Thermowells – Tapered**

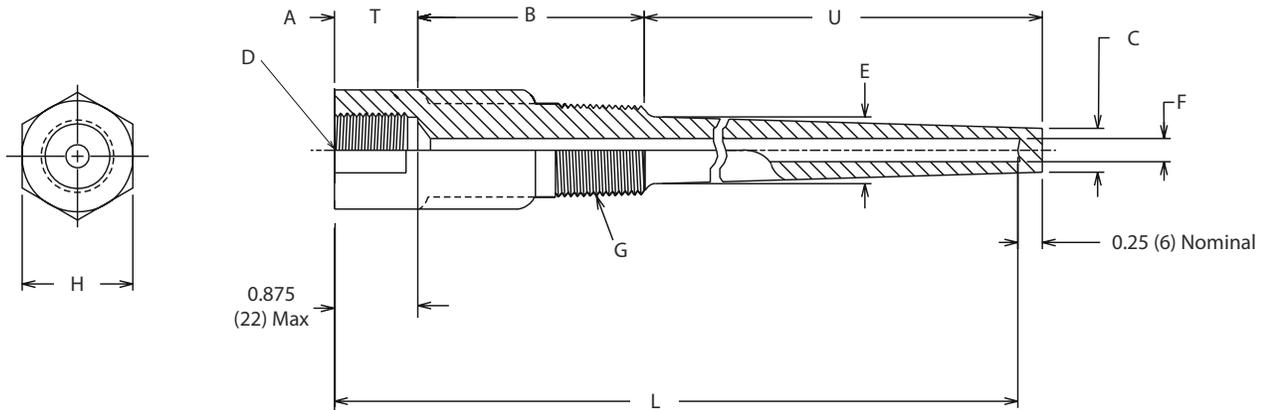

- A. Lagging extension, nominal
- B. Wrench and thread allowance 1.75 (44)
- C. Tip diameter A
- D. 1/2-14 NPSM
- E. Root diameter B
- F. Inside diameter 0.26 (7)
- G. Process mounting thread P


Dimensions are in inches (millimeters).

**Note**

1/2-14 ANPT threads are available.

Thread (P)	Hex size inches (H)
0.5-0.75 ANPT	1.125
1-11.5 ANPT	1.375

**Figure 38: Thread Mounted Thermowells - Stepped**

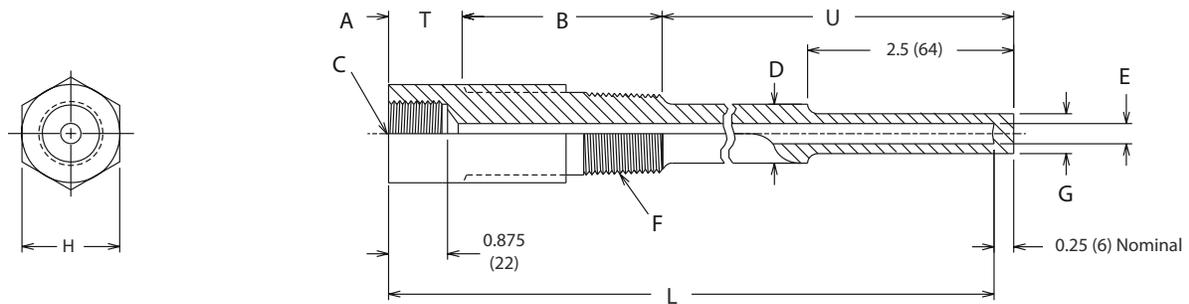


- A. Lagging extension, nominal
- B. Wrench and thread allowance 1.75 (44)
- C. 1/2-14 NPSM
- D. Root diameter B
- E. Inside diameter 0.26 (7)
- F. Process mounting thread P
- G. Tip diameter A

Dimensions are in inches (millimeters).

**Note**

½-14 ANPT threads are available.

**Figure 39: Thread Mounted Thermowells - Stepped, for Thermowells with Overall Length greater than 42-in. (3-Piece Construction)**

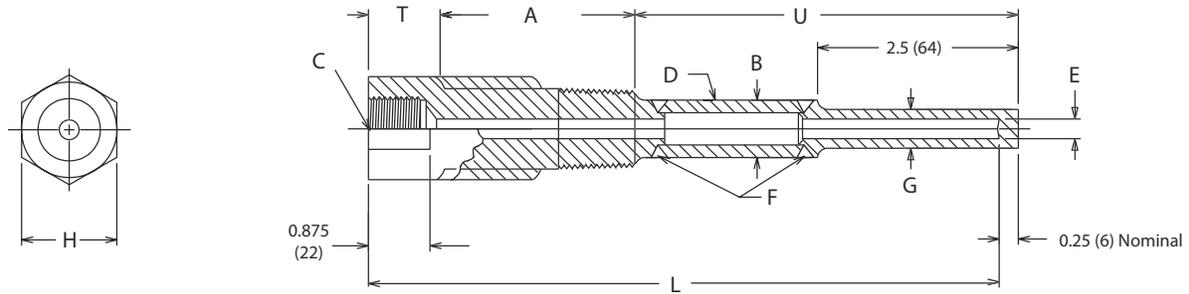

- A. Wrench and thread allowance 1.75 (44)
- B. Root diameter B
- C. ½-14 NPSM
- D. Pipe
- E. Inside diameter 0.26 (7)
- F. Welds
- G. Tip diameter A


Dimensions are in inches (millimeters).

**Note**

½-14 ANPT threads are available.

Thread (P)	Hex size Inches (H)
0.5-0.75 ANPT	1.125
1-11.5 ANPT	1.375

**Figure 40: Weld Mounted Thermowells - Straight**

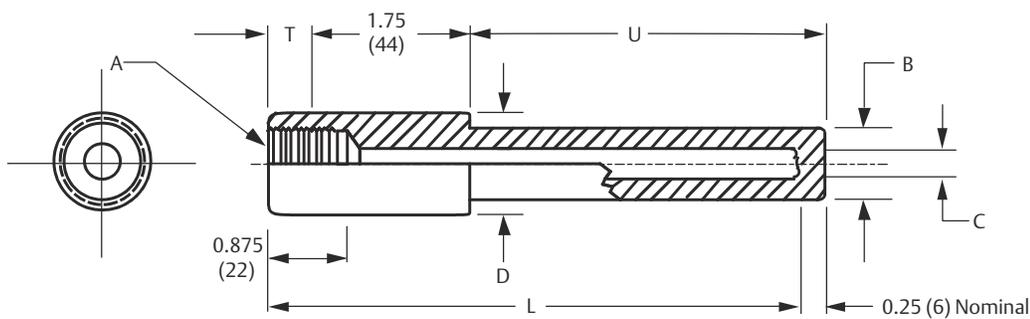


- A. ½-14 NPSM
- B. Tip diameter A
- C. Inside diameter 0.26 (7)
- D. Socket weld diameter S

Dimensions are in inches (millimeters).

**Note**

½-14 ANPT threads are available.

**Figure 41: Weld Mounted Thermowells - Tapered**

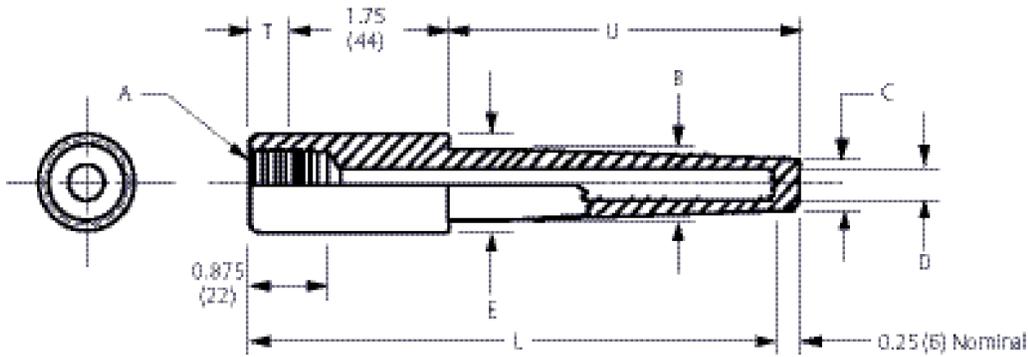

- A. 1/2-14 NPSM
- B. Root diameter B
- C. Tip diameter A
- D. Inside diameter 0.26 (7)
- E. Socket weld diameter


Dimensions are in inches (millimeters).

**Note**

1/2-14 ANPT threads are available.

Pipe size	Socket size (S) diameter
0.75-in.	1.050 ±0.010
1-in.	1.315 ±0.010

**Figure 42: Weld Mounted Thermowells-Stepped**

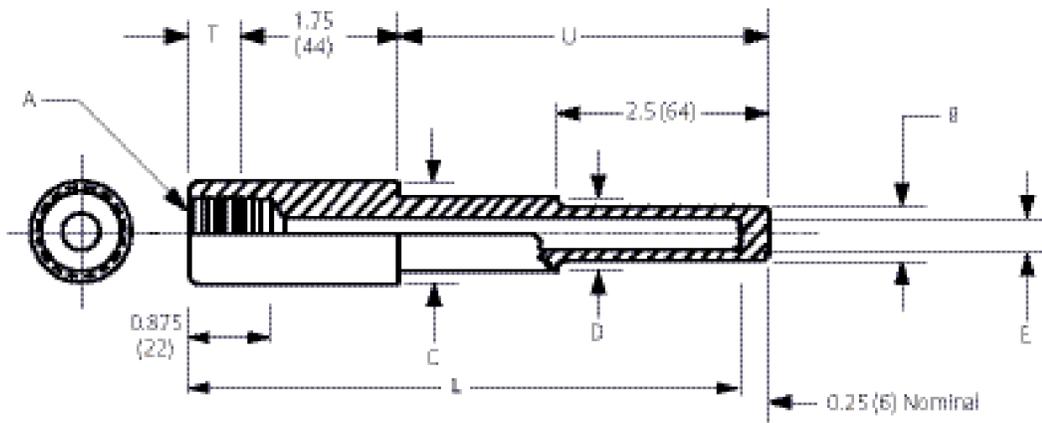


- A. 1/2-14 NPSM
- B. Tip diameter A
- C. Socket weld diameter S
- D. Root diameter B
- E. Inside diameter 0.26 (7)

Dimensions are in inches (millimeters).

**Note**

½-14 ANPT threads are available.

**Figure 43: Weld Mounted Thermowells - Stepped, for Thermowells with Overall Length greater than 42-in. (3-Piece Construction)**

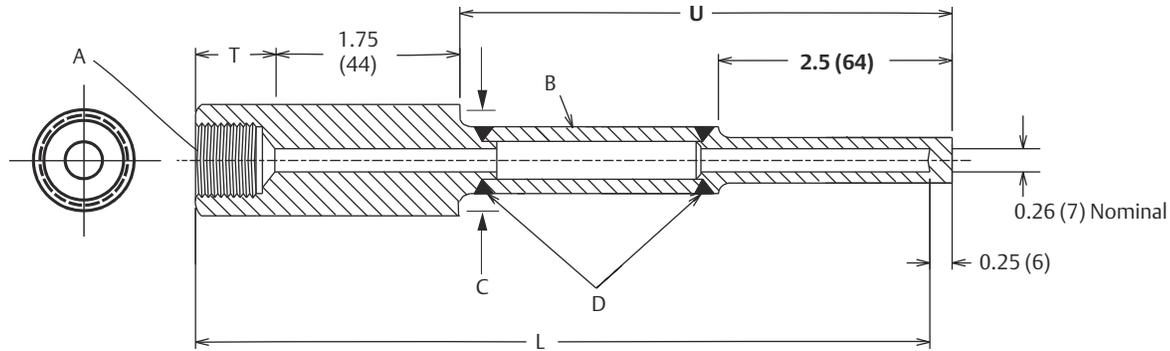

- A. ½-14 NPSM
- B. Pipe
- C. Socket weld diameter S
- D. Welds


Dimensions are in inches (millimeters).

**Note**

½-14 ANPT threads are available.

Pipe size	Socket size (S) diameter
0.75-in.	1.050 ±0.010
1-in.	1.315 ±0.010

**Figure 44: Flange Mounted Thermowells - Straight**

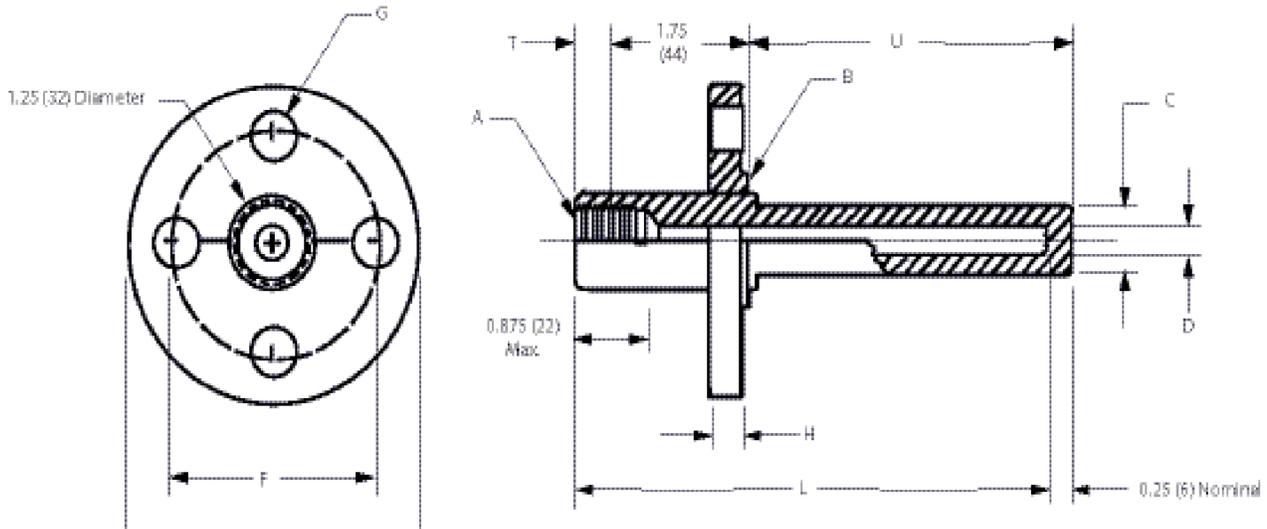


- A. 1/2-14 NPSM
- B. Flange mount
- C. Tip diameter A
- D. Inside diameter 0.26 (7)

Dimensions are in inches (millimeters).

**Note**

1/2-14 ANPT threads are available.

**Figure 45: Flange Mounted Thermowells - Tapered**

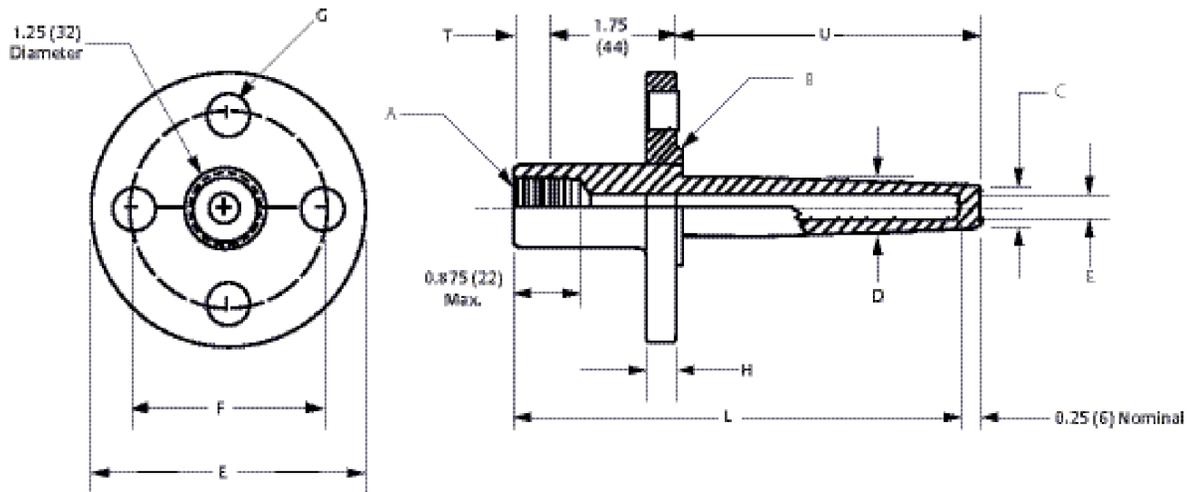

- A. 1/2-14 NPSM
- B. Flange mount
- C. Tip diameter A
- D. Root diameter B
- E. Inside diameter 0.26 (7)


Dimensions are in inches (millimeters).

**Note**

½–14 ANPT threads are available.

Size (in.)	O.D. (E)	Circle (F)	Number of holes and diameter (G)	Thickness (in.) (H)
<b>Class 150</b>				
1.0	4.25	3.12	four-0.625	0.5625
1.5	5.0	3.88	four-0.625	0.6875
2.0	6.0	4.75	four-0.75	0.75
3.0	7.5	6.00	four-0.75	0.94
<b>Class 300</b>				
1.0	4.88	3.5	four-0.75	0.69
1.5	6.12	4.5	four-0.88	0.81
2.0	6.5	5.0	eight-0.75	0.88
<b>Class 600</b>				
1.0	4.88	3.5	four-0.75	0.94
1.5	6.12	4.5	four-0.88	1.13
2.0	6.5	5.0	eight-0.75	1.25
<b>Class 900 and 1500</b>				
1.5	7.0	4.88	four-1.12	1.5
<b>Class 2500</b>				
1.5	8.0	5.75	four-1.25	2.0

**Figure 46: Flange Mounted Thermowells-Stepped**

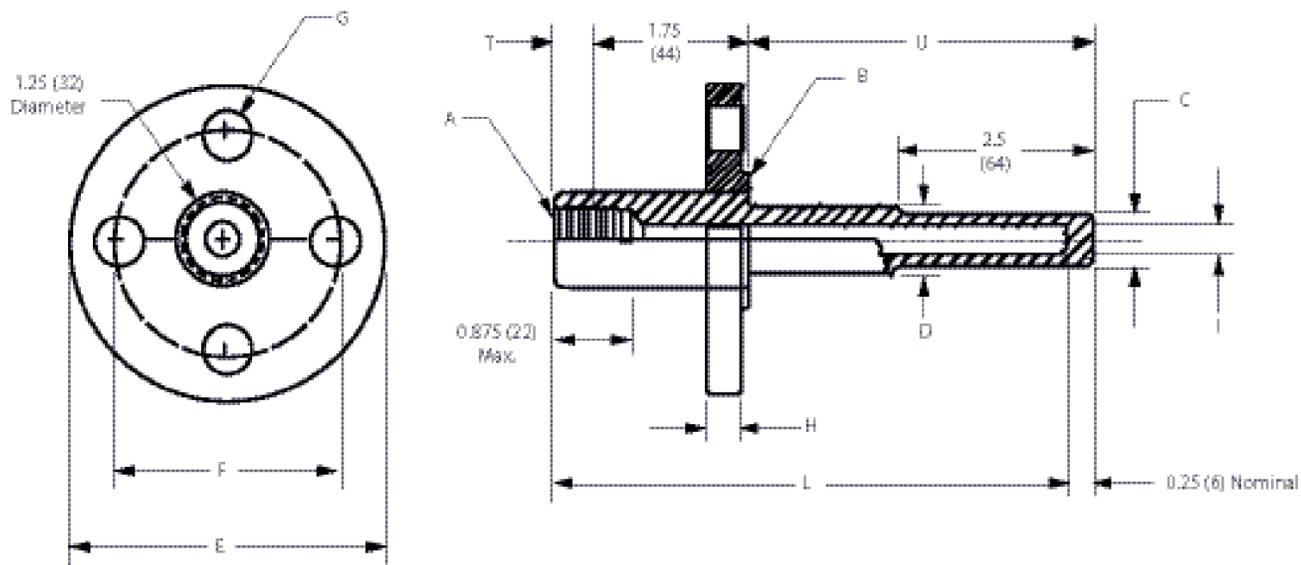

- A. 1/2-14 NPSM
- B. Flange mount
- C. Tip diameter A
- D. Root diameter B
- E. Inside diameter 0.26 (7)

Dimensions are in inches (millimeters).

**Note**

1/2-14 ANPT threads are available.



Size (in.)	O.D. (E)	Circle (F)	Number of holes and diameter (G)	Thickness (in.) (H)
<b>Class 150</b>				
1.0	4.25	3.12	four-0.625	0.5625
1.5	5.0	3.88	four-0.625	0.6875
2.0	6.0	4.75	four-0.75	0.75
3.0	7.5	6.00	four-0.75	0.94
<b>Class 300</b>				
1.0	4.88	3.5	four-0.75	0.69
1.5	6.12	4.5	four-0.88	0.81
2.0	6.5	5.0	eight-0.75	0.88
<b>Class 600</b>				
1.0	4.88	3.5	four-0.75	0.94
1.5	6.12	4.5	four-0.88	1.13
2.0	6.5	5.0	eight-0.75	1.25
<b>Class 900 and 1500</b>				
1.5	7.0	4.88	four-1.12	1.5
<b>Class 2500</b>				
1.5	8.0	5.75	four-1.25	2.0

# Product Certifications

Rev 2.14

## European Directive Information

A copy of the EC Declaration of Conformity can be found at the end of the Quick Start Guide. The most recent revision of the EC Declaration of Conformity can be found at [Emerson.com/Rosemount](https://www.emerson.com/Rosemount).

## Ordinary Location Certification

As standard, the transmitter has been examined and tested to determine that the design meets the basic electrical, mechanical, and fire protection requirements by a nationally recognized test laboratory (NRTL) as accredited by the Federal Occupational Safety and Health Administration (OSHA).

## North America

The US National Electrical Code (NEC) and the Canadian Electrical Code (CEC) permit the use of Division marked equipment in Zones and Zone marked equipment in Divisions. The markings must be suitable for the area classification, gas, and temperature class. This information is clearly defined in the respective codes.

## USA

### E5 FM Explosion proof, Dust-Ignition proof

**Certificate** FM17US0170X

**Standards** FM Class 3600: 2011; FM Class 3611: 2004; FM Class 3615: 2006; FM Class 3810: 2005; ANSI/NEMA - 250: 1991

**Markings** XP CL I, Div 1, GP B, C, D; DIP CL II/III, Div 1, GP E, F, G; T5(-50 °C ≤ T<sub>a</sub> ≤ 85 °C); when installed per Rosemount drawing 00068-0013; Type 4X

## Canada

### E6 CSA Explosion proof and Dust-Ignition proof

**Certificate** 1063635

**Standards** CSA C22.2 No. 0-M91; CSA C22.2 No. 25-1966; CSA C22.2 No. 30-M1986; CSA C22.2 No. 94-M91; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987

**Markings** XP CL I, Div 1, GP B, C, D; DIP CL II/III, Div 1, GP E, F, G; CL I, Div 2, GP A, B, C, D; (-50 °C ≤ T<sub>a</sub> ≤ 85 °C); when installed per Rosemount drawing 00068-0033; Type 4X (Spring loaded sensors must be installed in a thermowell to maintain Type 4X and Cl. II/III rating)

## Europe

### E1 ATEX Flameproof

<b>Certificate</b>	FM12ATEX0065X
<b>Standards</b>	EN 60079-0: 2012+A11:2013, EN 60079-1: 2014, EN 60529:1991 +A1:2000 + A2:2013
<b>Markings</b>	 II 2 G Ex db IIC T6...T1 Gb, T6(-50 °C ≤ T <sub>a</sub> ≤ +40 °C), T5...T1(-50 °C ≤ T <sub>a</sub> ≤ +60 °C) See <a href="#">Process temperature limits</a> for process temperatures.

### Special Conditions for Safe Use(X)

1. See certificate for ambient temperature range.
2. The non-metallic label may store an electrostatic charge and become a source of ignition in Group III environments.
3. Guard the LCD display cover against impact energies greater than 4 joules.
4. Flameproof joints are not intended for repair.
5. A suitable certified Ex d or Ex tb enclosure is required to be connected to temperature probes with Enclosure option “N”.
6. Care shall be taken by the end user to ensure that the external surface temperature on the equipment and the neck of DIN Style Sensor probe does not exceed 130 °C.
7. Non-Standard Paint options may cause risk from electrostatic discharge. Avoid installations that cause electrostatic build-up on painted surfaces, and only clean the painted surfaces with a damp cloth. If paint is ordered through a special option code, contact the manufacturer for more information.

## International

### E7 IECEx Flameproof

<b>Certificate</b>	IECEx FMG 12.0022X
<b>Standards</b>	IEC 60079-0:2011, IEC 60079-1:2014-06
<b>Markings</b>	Ex db IIC T6...T1 Gb, T6(-50 °C ≤ T <sub>a</sub> ≤ +40 °C), T5...T1(-50 °C ≤ T <sub>a</sub> ≤ +60 °C) See <a href="#">Process temperature limits</a> for process temperatures.

### Special Conditions for Safe Use(X)

1. See certificate for ambient temperature range.
2. The non-metallic label may store an electrostatic charge and become a source of ignition in Group III environments.
3. Guard the LCD display cover against impact energies greater than 4 joules.
4. Flameproof joints are not intended for repair.
5. A suitable certified Ex d or Ex tb enclosure is required to be connected to temperature probes with Enclosure option “N”.
6. Care shall be taken by the end user to ensure that the external surface temperature on the equipment and the neck of DIN Style Sensor probe does not exceed 130 °C.
7. Non-Standard Paint options may cause risk from electrostatic discharge.

## Brazil

### E2 INMETRO Flameproof

<b>Certificate</b>	UL-BR 13.0535X
<b>Standards</b>	ABNT NBR IEC 60079-0:2013; ABNT NBR IEC 60079-1:2016; ABNT NBR IEC 60079-31:2014
<b>Markings</b>	Ex db IIC T6...T1 Gb T6...T1(-50 °C ≤ T <sub>a</sub> ≤ +40 °C), T5...T1(-50 °C ≤ T <sub>a</sub> ≤ +60 °C) Ex tb IIIC T130 °C Db (-40 °C ≤ T <sub>a</sub> ≤ +70 °C)

#### Special Conditions for Safe Use (X):

1. See certificate for ambient temperature range.
2. The non-metallic label may store an electrostatic charge and become a source of ignition in Group III environments.
3. Guard the LCD display cover against impact energies greater than 4 joules.
4. A suitable certified Ex d or Ex tb enclosure is required to be connected to temperature probes with Enclosure option "N".
5. Care shall be taken by the end user to ensure that the external surface temperature on the equipment and the neck of DIN Style Sensor probe does not exceed 130 °C.
6. Consult the manufacturer if dimensional information on the flameproof joints is necessary.

## EAC

### EM Technical Regulations Customs Union (EAC) Flameproof

**Markings** 1Ex db IIC T6...T1 Gb X; T6 (-55 to 40 °C); T5..T1 (-55 to 60 °C); IP66, IP68

#### Special Condition for Safe Use (X)

1. See certificate.

### IM Technical Regulations Customs Union (EAC) Flameproof

**Markings:** 0Ex ia IIC T5/T6 Ga X; T5, P<sub>i</sub> = 0.29 W, (-60 to +70 °C); T6, P<sub>i</sub> = 0.29 W, (-60 to +60 °C); T6, P<sub>i</sub> = 0.192 W, (-60 to +70 °C)

#### Special Condition for Safe Use (X)

1. See certificate.

### KM Technical Regulations Customs Union (EAC) Flameproof

**Markings:** Ex tb IIIC T130 °C Db X (-60 to +70 °C); Markings for both EM and IM above are included with this option.

#### Special Condition for Safe Use (X)

1. See certificate.

## Korea

### EP Korea Explosionproof/Flameproof

<b>Certificate</b>	13-KB4BO-0560X
<b>Markings</b>	Ex d IIC T6...T1; T6(-50 °C ≤ T <sub>a</sub> ≤ +40 °C), T5...T1(-50 °C ≤ T <sub>a</sub> ≤ +60 °C)

**Special Condition for Safe Use(X)**

1. See certificate.

**Combinations**

- KF**                      Combination of E1 and E6
- KD**                      Combination of E5, E6, and 1
- KM**                      Combination of EM and IM

**Table 17: Available Safety Approvals with Connection Heads**

Refer to this table to determine which approvals are available with each connection head.

Code	Connection head	Approval code				
		E1	E2	E5	E6	E7
R	Aluminum connection head, six terminals, flat cover, unpainted	Y	N	Y	Y	N
T	Aluminum connection head, six terminals, extended cover, unpainted	N	N	Y	Y	N
P	Aluminum connection head, six terminals, flat cover, painted	Y	N	Y	Y	N
L	Aluminum connection head, six terminals, extended cover, painted	N	N	Y	Y	N
N	Sensor only with 6-in. PTFE-insulated, 24-gauge leadwires	Y	Y	Y	Y	Y
D	Rosemount Aluminum Connection Head with 1/2-in. entries	Y	Y	Y	Y	Y
C	Polypropylene connection head	N	N	N	N	N
G	Rosemount SST Connection Head with 1/2-in. entries	Y	Y	Y	Y	Y

**Process temperature limits**

**Table 18: Sensor Only (No Transmitter Installed)**

Extension length	Process temperature (°C)						
	Gas						Dust
	T6	T5	T4	T3	T2	T1	T130 °C
Any extension length	85	100	135	200	300	450	130

**Table 19: Transmitter**

Extension length	Process temperature (°C)						
	Gas						Dust
	T6	T5	T4	T3	T2	T1	T130 °C
No extension	55	70	100	170	280	440	100
3-in. extension	55	70	110	190	300	450	110
6-in. extension	60	70	120	200	300	450	110

Table 19: Transmitter (continued)

Extension length	Process temperature (°C)						
	Gas						Dust
	T6	T5	T4	T3	T2	T1	T130 °C
9-in extension	65	75	130	200	300	450	120

Adhering to the process temperature limitations of Table 20 will ensure that the service temperature limitations of the LCD cover are not exceeded. Process temperatures may exceed the limits defined in Table 20 if the temperature of the LCD cover is verified to not exceed the service temperatures in Table 21 and the process temperatures do not exceed the values specified in Table 19.

Table 20: Transmitter with LCD Cover - Process Temperature (°C)

Extension length	Gas			Dust
	T6	T5	T4...T1	T130 °C
No extension	55	70	95	95
3-in. extension	55	70	100	100
6-in. extension	60	70	100	100
9-in. extension	65	75	110	110

Table 21: Transmitter with LCD Cover - Service Temperature (°C)

Extension length	Gas			Dust
	T6	T5	T4...T1	T130 °C
No extension	65	75	95	95



#### Emerson Automation Solutions

6021 Innovation Blvd.  
Shakopee, MN 55379, USA  
📞 +1 800 999 9307 or +1 952 906 8888  
📠 +1 952 204 8889  
✉️ RFQ.RMD-RCC@Emerson.com

#### North America Regional Office

Emerson Automation Solutions  
8200 Market Blvd.  
Chanhassen, MN 55317, USA  
📞 +1 800 999 9307 or +1 952 906 8888  
📠 +1 952 204 8889  
✉️ RMT-NA.RCCRFQ@Emerson.com

#### Latin America Regional Office

Emerson Automation Solutions  
1300 Concord Terrace, Suite 400  
Sunrise, FL 33323, USA  
📞 +1 954 846 5030  
📠 +1 954 846 5121  
✉️ RFQ.RMD-RCC@Emerson.com

#### Europe Regional Office

Emerson Automation Solutions Europe  
GmbH  
Neuhofstrasse 19a P.O. Box 1046  
CH 6340 Baar  
Switzerland  
📞 +41 (0) 41 768 6111  
📠 +41 (0) 41 768 6300  
✉️ RFQ.RMD-RCC@Emerson.com

#### Asia Pacific Regional Office

Emerson Automation Solutions  
1 Pandan Crescent  
Singapore 128461  
📞 +65 6777 8211  
📠 +65 6777 0947  
✉️ Enquiries@AP.Emerson.com

#### Middle East and Africa Regional Office

Emerson Automation Solutions  
Emerson FZE P.O. Box 17033  
Jebel Ali Free Zone - South 2  
Dubai, United Arab Emirates  
📞 +971 4 8118100  
📠 +971 4 8865465  
✉️ RFQ.RMTMEA@Emerson.com

 [Linkedin.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)

 [Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

©2020 Emerson. All rights reserved.

Emerson Terms and Conditions of Sale are available upon request. The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount is a mark of one of the Emerson family of companies. All other marks are the property of their respective owners.