



## Pressure Accessories - Push-Button Pressure Cock Valves

Used where pressure gauge is intended for controlling purpose and the value not needed to be seen continuously.



### Usage Properties

|                           |  |
|---------------------------|--|
| Operating Pressure (max.) | · 6 bar  |
| Operating Temperature     | · +100°C   |
| Storage Temperature       | · -40 ... +70 °C   |
| Applications              | · Compatible with all gases and liquids which do not attack copper alloys. |

### Constructive Properties

|                    |                         |
|--------------------|-------------------------|
| Mounting Type      | · Vertical / Lateral    |
| Case               | · Brass - Nickel Plated |
| Sealing            | · NBR                   |
| Inlet Connections  | · G 1/2" · G 1/4"       |
| Outlet Connections | · G 1/2" · G 1/4"       |
| Max. Pressure      | · PN 6                  |

**Technical Drawings - Push-Button Pressure Cock Valves**

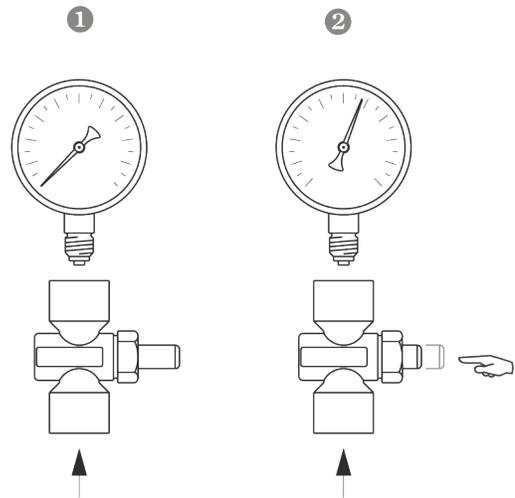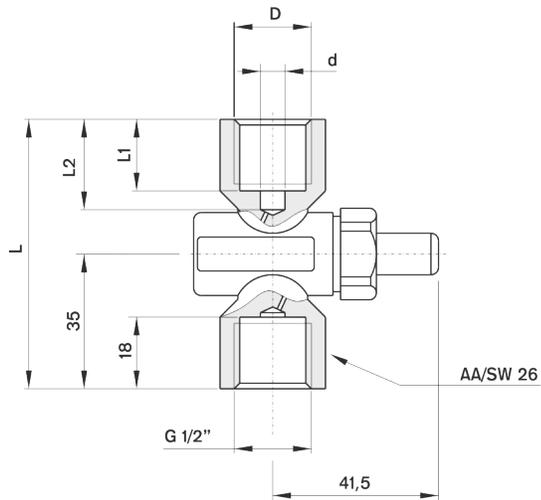

1040 /

PN 4 bar

| D      | L1 | d   | L2   | L  | gr. | Model #    |
|--------|----|-----|------|----|-----|------------|
| G 1/4" | 12 | 5,5 | 16,5 | 70 | 250 | 1040 04 02 |
| G 1/2" | 18 | 7   | 23,5 | 70 | 245 | 1040 04 04 |

1040 /