

# Technical Datasheet



## Industrial Series

### Diaphragm Operated Pressure Switch

Models: S21, S22 & S24

#### Key Features

- Weatherproof and Flameproof models ATEX and NEC 500.
- NACE MR-01-75 compatibility.
- Ranges available up to 700 bar (10,000 psi).  
Maximum working pressure up to 1000 bar (15,000 psi).
- Field set point adjustment against a reference scale.
- Hermetically sealed microswitch options.
- Optional gold alloy contacts.
- Terminal block for easy field wiring.
- Safety vented design as standard.
- PED 2014/68/EU CAT IV option.



#### Series Overview

- The Industrial Series switches were developed in the mid -1990's to offer customers a robust range of switches suitable for applications where requirements were more standard than those for which the highly configurable Performance Series switches were designed.
- Using diaphragm based sensors and a more traditional in-line force balance mechanism to transfer movement from the sensor to the microswitch, these switches are suitable for a wide range of industrial applications. Various international approvals make the Industrial Series suitable for use in both safe and Hazardous Areas in Europe, North America and throughout the world.

Other products in the series include:

- Differential Pressure Switches: Model S30
- Temperature Switches: Model S70



#### Product applications

The S20 Industrial Series is suitable for a wide range of applications in:

- Oil & Gas
- Chemical
- Petrochemical
- Refining
- Power
- OEM

The choice of models available ensures that the S20 Industrial Series is suitable for use in:

- Corrosive atmospheres
- Resistant to chemical attack


#### How can we help you?

Delta Mobrey offers fast, efficient and knowledgeable support when and where you need it. Please visit our web site at [www.delta-mobrey.com](http://www.delta-mobrey.com) to find your local support centre or call us on:

**+44 (0)1252 729140**

## How to order

Switches can be configured by selecting codes representing the desired features from the tables that follow. The chart below, describes how the model code is built up. For assistance in configuring a switch that best suits your needs, please contact your local sales office.

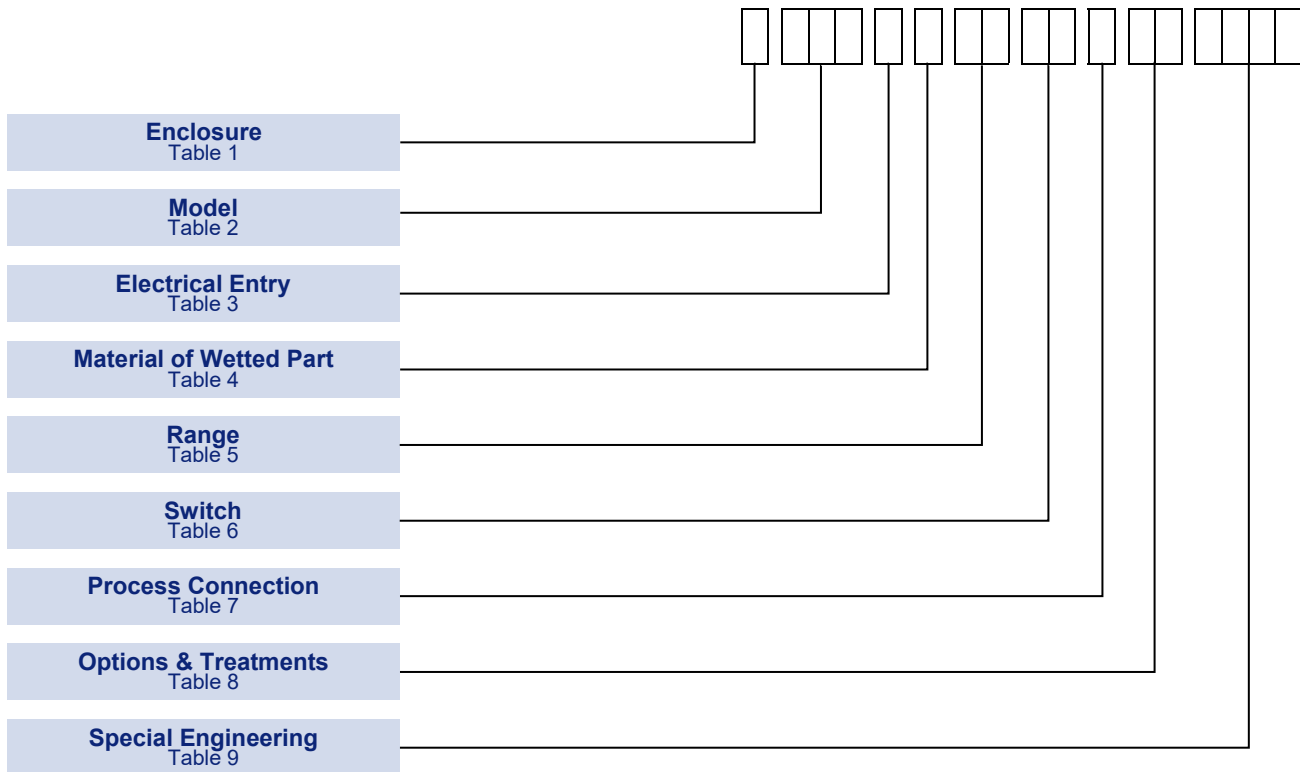

**NOTE:** Options shaded in the following tables are the most common options and are available on the quickest lead-times and at the lowest cost.

**NOTE:** Only the most common options are shown in this data sheet. Should you require a feature that is not shown, please contact your local sales office for further details.

## Technical Specification

<b>Industrial Series</b> Models: S21, S22 & S24	<b>Accuracy:</b>	Set point repeatability ± 1% of span at 20°C / 68°F ambient.
	<b>Storage Temperature:</b>	-25 to +60°C / -13 to +140°F
	<b>Ambient Temperature:</b>	-25 to +60°C / -13 to +140°F For continuous use below -25°C (-13°F) we recommend using only enclosure H, R, T, U & A with special gaskets and limited switching.
	<b>Maximum Process Temperature:</b>	Subject to appropriate installation practice, the component parts withstand up to +60°C (+140°F). For process temperatures up to +120°C (+248°F), order WETTED PARTS Code A (Table 4). For higher temperatures, refer to SPECIAL ENGINEERING.
	<b>Enclosure classification:</b>	IP66 / NEMA 4X / Flameproof Ex d
	<b>Switch output:</b>	SPDT or DPDT snap action microswitch (standard) Hermetically sealed (optional)
	<b>Electrical rating:</b>	See Table 6
	<b>Process Connection:</b>	Rc 1/4 (BSP), 1/4 NPT Internal, 1/2 NPT Internal, 1/2 NPT External
	<b>Approximate Weight:</b>	2.7kg / 5.9lb to 6.6kg / 14.5lb depending on model

# Enclosure

TABLE 1	
---------	--

**FINISH**

All enclosures except Type R, A and U are finished in light grey epoxy resin paint.

Special finishes to order.

**INTRINSIC SAFETY**

Because of the low voltages and current of I.S. circuits, we recommend using gold and/or sealed contacts.

**NOTE: Codes H, 2 & T for 4X**

Aluminium Enclosure protected by quality epoxy paint system.

Performance of enclosure requires careful installation and sealing of cable gland connection in site.

Assembly requires to be built for Marine use, See Table 8, Code 02.

**NOTE: Codes 2 and 3**

To be used on S24 only with S or T wetted parts.

**NOTE: Codes 5 and 4**

To be used only on switch codes 04/05, 0G/0H, H2/H3/H6 - See Table 6. PED Cat IV not available at present.

Temperatures in Table 1 refer to limitations for certified enclosures.

See **TECHNICAL DATA**.

ENCLOSURE TYPES	Code
<b>FLAMEPROOF ENCLOSURES</b>	
<b>ATEX Ex d IIC T6 Gb (-60 to +65°C), T5 Gb (-60 to +80°C) II 2 GD (ZONE 1)</b> Gravity die-cast enclosure in aluminium-silicon alloy, epoxy painted. Suitable for outdoor use, IP66 / NEMA 4X.  II 2GD	<b>H</b>
<b>ATEX Ex d IIC T6 Gb (-60 to +65°C), T5 Gb (-60 to +80°C) II 2 GD (ZONE 1)</b> <b>For Aggressive Atmospheres</b> Investment cast enclosure in austenitic stainless steel. Suitable for outdoor use, IP66 / NEMA 4X.  II 2GD	<b>R</b>
<b>ATEX Ex d IIC T6 Ga/Gb (-60 to +65°C), T5 Ga/Gb (-60 to +80°C) (S24 only) IIC 1/2 GD (ZONE 0/1)</b> <b>For Aggressive Atmospheres</b> Investment cast enclosure in austenitic stainless steel. Suitable for outdoor use, IP66 / NEMA 4X.  II 1/2GD	<b>2</b>
<b>ATEX Ex d IIC T6 Ga/Gb (-60 to +65°C), T5 Ga/Gb (-60 to +80°C) (S24 only) II 1/2 GD (ZONE 0/1)</b> Gravity die-cast enclosure in aluminium LM25. Suitable for outdoor use, IP66 / NEMA 4X.  II 1/2GD	<b>3</b>
<b>NEC 500, NEMA 7, 9</b> Gravity die-cast enclosure in aluminium-silicon alloy, epoxy painted. Class 1, Groups C and D, Class II, Groups E, F and G. Suitable for outdoor use, IP66 / NEMA 4X.	<b>T</b>
<b>NEC 500, NEMA 7, 9</b> <b>For Aggressive Atmospheres</b> Investment cast enclosure in austenitic stainless steel. Class 1, Groups C and D, Class II, Groups E, F and G. Suitable for outdoor use, IP66 / NEMA 4X.	<b>U</b>
<b>WEATHERPROOF ENCLOSURES</b>	
<b>General purpose</b> The basic enclosure is pressure die-cast in zinc alloy, epoxy painted, with weather protection not less than NEMA 4, IP66.	<b>W</b>
<b>For Aggressive Atmospheres</b> Investment cast enclosure in austenitic stainless steel with weather protection not less than NEMA 4X, IP66	<b>A</b>
<b>INTRINSICALLY SAFE ENCLOSURES (ZONE 0)</b>	
<b>ATEX Ex ia IIC T6 Ga (-25°C ≤ Ta ≤ +60°C) or T5 Ga (-60°C ≤ Ta ≤ +80°C) II 1G</b> As code "W" but Ex ia. Weatherproof to IP66 / NEMA 4.  II 1G	<b>5</b>
<b>ATEX Ex ia IIC T6 Ga (-25°C ≤ Ta ≤ +60°C) or T5 Ga (-60°C ≤ Ta ≤ +80°C) II 1G</b> As code "A" but Ex ia. Weatherproof to IP66 / NEMA 4X.  II 1G	<b>4</b>

**Industrial Series**  
Models: S21, S22 & S24


## Models


### S21/2

For applications up to 100 bar (1500 psi). Maximum working pressure 155 bar (2250 psi).

### S24

For applications up to 700 bar (10,000 psi). Maximum working pressure 1000 bar (15,000 psi)


 Applies only to models S21/ S24

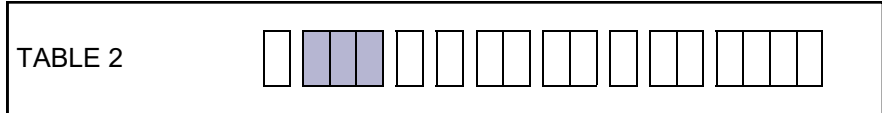


	Code
<b>Fixed Switching Differential</b> SPDT& DPDT options available. See Table 6.	<b>S21</b>
<b>Adjustable Switching Differential (Limited Span)</b> Achieved by special microswitch with built in adjuster, SPDT only. See Table 6.	<b>S22</b>
<b>Fixed Switching Differential</b> SPDT & DPDT options available. See Table 6.	<b>S24</b>

## Electrical Entry

Adaptors are available for other popular thread sizes.

 \* For codes 3 & 6 - see approvals and Table 1 Codes T & U.

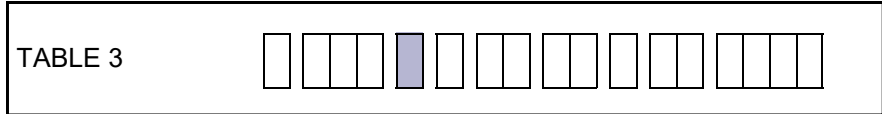

	Code
Enclosures W & 5: 22mm (0.86 ins) Dia clearance hole for 20mm / ¾ inch O/Dia Conduit.	<b>1</b>
Enclosures W & 5: M20 x 1.5 elbow adaptor to suit.	<b>0</b>
Enclosure W, A, 5 & 4: 3/4-NPT INT. elbow adaptor to suit.	<b>3</b>
Enclosures H, R, A & 4: M20 x 1.5 ISO thread.	<b>0</b>
Enclosures H & R: M20 x 1.5 ISO thread, dual entry.	<b>5</b>
Enclosures H & R: 1/2-NPT INT. (direct).	<b>2</b>
Enclosures H, R, T & U: 3/4-NPT INT. (direct).	<b>3*</b>
Enclosures H, R, T & U: 3/4-NPT INT. dual entry.	<b>6*</b>
Enclosures W & 5: 22mm (0.86 ins) Dia clearance hole for 20mm / ¾ inch O/Dia Conduit, dual entry.	<b>7</b>
Enclosures H & R: 1/2-NPT INT. dual entry.	<b>4</b>

## Material of Wetted Parts


Industrial Series


Models: S21, S22 & S24

### WELDED CONSTRUCTION Codes S and T

For reduced risk against leakage under extreme or unusual conditions the diaphragm may be welded directly to the process connection, eliminating the O-ring.


Welded construction not available on ranges CC to CE (CW to CK). (See table 5).

 Applies to all materials.

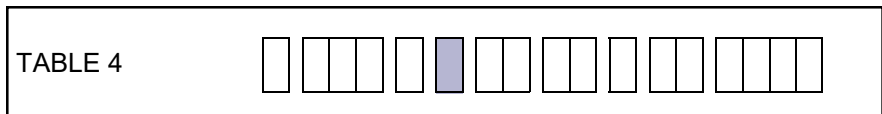


	Code
316 SS diaphragm, process connection and Viton O-ring seal	<b>A</b>
316 SS diaphragm, process connection and Nitrile (Buna-N) O-ring seal	<b>G</b>
Nickel alloy (Monel) diaphragm, 316 SS process connection and Viton O-ring seal for applications as laid down in NACE MR 01-75	<b>K</b>
Nickel alloy (Monel) diaphragm, 316 SS process connection and Nitrile (Buna-N) O-ring seal	<b>P</b>
316 SS diaphragm and process connection. All welded construction	<b>S</b>
Nickel alloy (Monel) diaphragm and process connection. All welded construction (suitable for NACE MR 01-75)	<b>T</b>

# Setting Ranges

TABLE 5 

$P_{max}$  = maximum working pressure

When ordering, please state units required. Range and set point will be in units preference.


 Applies to all ranges


$P_{max}$		Model	Range						Code
bar	psi		Bar	mbar	Code	psi	In.Hg	In.H <sub>2</sub> O	
15	217	S21	-1 to +1.5	12 to 250 -120 to +120 100 to 600 -1000 to 0	<b>CC</b> <b>CD</b> <b>CE</b> <b>A0</b> <b>G3</b>	1.5 to 8.5 -14.5 to 20	-30 to 0	5 to 100 -50 to +50	<b>CW</b> <b>CH</b> <b>CK</b> <b>AB</b> <b>GK</b>
27	400	S21/2	0.25 to 1.6 0.4 to 2.5 1 to 6		<b>DB</b> <b>DC</b> <b>DE</b>	4 to 25 6 to 40 16 to 100			<b>DK</b> <b>DP</b> <b>DZ</b>
70	1000	S21/2	1.6 to 10 2.5 to 16		<b>EA</b> <b>EB</b>	25 to 160 40 to 250			<b>EH</b> <b>EM</b>
110	1600	S21/2	4 to 25 10 to 40 15 to 75		<b>EC</b> <b>ED</b> <b>EF</b>	60 to 400 160 to 600 250 to 1000			<b>ER</b> <b>EW</b> <b>EE</b>
155	2250	S21/2	10 to 100		<b>FA</b>	160 to 1500			<b>F6</b>

$P_{max}$		Model	Range			Code
bar	psi		Bar	Code	psi	
-1 to 600	-30 to 8700	S24	0.4 to 2.5 1 to 6	<b>DC</b> <b>DE</b>	6 to 40 16 to 100	<b>DP</b> <b>DZ</b>
			1.6 to 10 2.5 to 16	<b>EA</b> <b>EB</b>	25 to 160 40 to 250	<b>EH</b> <b>EM</b>
			4 to 25 10 to 40 15 to 75	<b>EC</b> <b>ED</b> <b>EF</b>	60 to 400 160 to 600 250 to 1000	<b>ER</b> <b>EW</b> <b>EE</b>
			10 to 100	<b>FA</b>	160 to 1500	<b>F6</b>
1000	15000		7 to 160	<b>U7</b>	100 to 2300	<b>UK</b>
			25 to 250 50 to 400 100 to 700	<b>V7</b> <b>W7</b> <b>Y4</b>	350 to 3500 800 to 6000 1600 to 10000	<b>VC</b> <b>W9</b> <b>YF</b>

# Switch Options

TABLE 6



Model S21/4										
CSA RATING (RESISTIVE) § See note	IEC947-5-1 / EN 60947-5-1 RATING							Contact	Code	
	Designation & Utilization Category	Rated operational current $I_e$ (A) At rated operational voltage $U_e$	$U_i$	$U_{imp}$	VA Rating					
					AC	Make	Break			
5 Amps @ 110/250V AC Light Duty for AC only	AC14 D300 DC13 R300	0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC	250V	0.8kV	AC DC	432 28	72 28	SPDT DPDT	<b>00</b> <b>01</b>	
5 Amps @ 110/250V AC and 2 Amps @ 30V DC General purpose precision	AC14 D300 DC13 R300	0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC	250V	0.8kV	AC DC	432 28	72 28	SPDT DPDT	<b>02</b> <b>03</b>	
1 Amp @ 125V AC and § 100mA @ 30V DC Gold Alloy contacts for low voltage switching	1A @ 125 VAC RESISTIVE (IEC 1058-1/EN 61058-1)							SPDT DPDT	<b>04</b> <b>05</b>	
§ 5 Amps @ 110/250V AC & 5 Amps @ 30V DC Environmentally sealed	AC14 D300 DC13 R300	0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC	250V	0.5kV	AC DC	432 28	72 28	SPDT* DPDT*	<b>08</b> <b>09</b>	
15 Amps @ 125/250/480V AC General purpose precision	AC14 D300	0.6/0.3A @ 120/240V AC	250V	0.8kV	AC	432	72	SPDT DPDT	<b>10</b> <b>11</b>	
§ 1 Amp @ 30V AC and 30V DC Environmentally sealed with gold contacts	AC14 E150	0.3A @ 120 V AC	125V	0.5kV	AC	216	36	SPDT* DPDT*	<b>0G</b> <b>0H</b>	
5 Amps @ 250V AC & 2 Amps @ 30V DC Hermetically sealed. Gold plated silver contacts	AC14 D300 DC13 R300	0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC	250V	0.5kV	AC DC	432 28	72 28	SPDT DPDT	<b>H2</b> <b>H3†, H6‡</b>	
† 2 Single pole, double throw, simultaneous falling under pressure ‡ 2 Single pole, double throw, simultaneous rising under pressure										
Model S22										
5 Amps @ 110/250V AC Adjustable for AC only	AC14 D300	0.6/0.3A @ 120/240 V AC	250V	0.8kV	AC	432	72	SPDT	<b>0C</b>	
5 Amps @ 110/250V AC & 2 Amps @ 30V DC Adjustable	AC14 D300 DC13 R300	0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC	250V	0.8kV	AC DC	432 28	72 28	SPDT	<b>0D</b>	
<b>NOTE:</b> Enclosure Codes T and U. Microswitch Codes 02 and 03. CSA rating as follows:- 110/250V AC 5A 250V/125V DC 0.25/0.5A										
Enclosure Codes H and R. Microswitch Codes 02 and 03. CSA rating as follows:- 110/250V AC 5A 250V/125/30V DC 0.25/0.5/2A										
 00, 01, 02, 03, 04, 05, H2, H3†, H6‡ microswitches CSA accepted component for use in hazardous areas Class 1, Div 2, Groups A, B, C and D. When used in enclosures T and U.										
The electrical rating is dependent on the microswitch fitted to the instrument. The electrical ratings defined by each approval that the microswitch complies with and is shown on the product nameplate, ie CSA, or IEC. It should be noted that the instrument must be used within the electrical rating specified from the approval you require. This table lists the actual IEC ratings against the Designation & Utilization Category marked on the nameplates. In the absence of any verification by CSA the microswitch § manufacturer's rating is stated in <b>italics and bold</b> . <b>If in doubt seek guidance from the factory.</b>										
<b>NOTE:</b> For low energy circuits e.g. 30V and up to 100mA, we recommend using gold alloy contact switches. $U_i$ = rated insulation voltage $U_{imp}$ = rated impulse to withstand voltage across contacts.										

## Process Connection



 Applies to all connections in this table.

TABLE 7 

	Code
Rc 1/4 (1/4 BSP tr INT) to (ISO 7/1)	<b>A</b>
1/4—18 NPT INT	<b>F</b>
1/2—14 NPT INT	<b>H</b>
1/2—14 NPT EXT	<b>J</b>

## Options & Treatments

Combinations available, apply for details.



 Applies to all options and treatments in this table.

TABLE 8 

	Code
Tropicalisation High humidity atmospheres	<b>01</b>
Marine and Offshore Saline atmosphere or salt spray	<b>02</b>
Ammonia Process (wetted) parts and construction suitable for atmospheric ammonia	<b>03</b>
Oxygen Service 2: Process (wetted) parts are cleaned for oxygen	<b>04</b>
Oxygen Service 3: Process and non-process parts are cleaned for use with oxygen	<b>05</b>
Stainless Steel Pipe Mounting Bracket Permits local 2" pipe work to be utilized for mounting the instrument	<b>10</b>
Category IV Safety Accessory as defined in the Pressure Equipment Directive 2014/68/EU	<b>60</b>
Tagging - Variety of tagging methods are available	<b>APPLY FOR DETAILS</b>
Applies when - no option is required and selection is made from special engineering	<b>00</b>

## Special Engineering

Last 4 digits of model code only used when special engineering is required.



 Refer to engineering

TABLE 9 

	Code
Please consult Delta sales engineering for special requirements	<b>TBA</b>

**Performance Data**

TABLE 10

**TABLES 10A, 10B  
MODEL S21  
FIXED SWITCHING DIFFERENTIAL**

Due to manufacturing tolerances the figures quoted in these tables are for guidance only.

Flameproof models maybe up to 2 times higher depending on the range.

Should the differential be critical for specific applications our engineers should be consulted prior to ordering.

**MODEL S21**

**PSI UNITS**

**TABLE 10A**

Range		P <sub>max</sub> psi	SWITCHING OPTIONS SWITCHING DIFFERENTIAL IN H <sub>2</sub> O / in Hg / psi									
Code	H <sub>2</sub> O / in Hg / psi		00	01	02	03	04	05	08/0G	09/0H	H2	H3/H6
CW	5 to 100	217	2.0	3.2	2.4	3.2	2.0	2.4	3.2	6.0	12.0	12.0
CH	-50 to +50	217	3.2	5.6	3.2	9.2	3.2	3.2	5.6	7.2	8.0	8.0
CK	1.5 to 8.5	217	3.2	5.6	6.0	9.2	3.2	4.8	5.6	7.2	18.0	18.0
AB	-30 to 0	217	0.6	0.8	1.3	1.7	0.5	0.5	0.8	1.0	3.0	3.0
GK	14.5 to +20	218	0.3	0.6	0.7	1.5	0.3	0.4	0.5	0.7	2.2	2.2
DK	4 to 25	400	0.4	0.7	1.0	1.5	1.0	1.5	2.6	3.5	1.2	2.3
DP	6 to 40	400	0.4	0.7	1.0	1.5	1.0	1.5	2.6	3.5	1.2	2.3
DZ	16 to 100	400	0.6	0.9	1.7	2.0	1.5	2.2	3.5	1.6	2.9	5.8
EH	25 to 160	1000	1.5	2.2	3.6	6.5	2.2	3.3	11.6	14.5	6.0	11.6
EM	40 to 250	1000	2.2	4.0	5.1	9.9	3.6	5.8	13.1	17.4	7.5	14.5
ER	60 to 400	1600	4.4	6.5	15.2	19.6	7.3	10.2	26.0	35.0	26.0	52.0
EW	160 to 600	1600	7.3	11.6	20.0	26.0	11.6	17.4	44.0	46.0	31.0	61.0
EE	250 to 1000	1600	9.4	14.5	25.0	33.0	14.5	22.0	44.0	58.0	51.0	102
F6	160 to 1500	2250	14.5	22.0	51.0	65.0	29.0	44.0	87.0	116	73.0	145

**MODEL S21**

**BAR UNITS**

**TABLE 10B**

Range		P <sub>max</sub> bar	SWITCHING OPTIONS SWITCHING DIFFERENTIAL IN mbar									
Code	mbar/bar		00	01	02	03	04	05	08/0G	09/0H	H2	H3/H6
CC	12 to 250	15	5	8	6	8	5	6	8	15	30	30
CD	-120 to +120	15	8	14	8	23	8	8	14	18	20	20
CE	100 to 600	15	8	14	15	23	8	12	14	18	45	45
A0	-1000 to 0	15	21	27	45	60	18	18	30	36	105	105
G3	-1 to +1.5	15	21	40	48	100	24	30	36	45	150	150
DB	0.25 to 1.6	27	30	45	70	100	70	100	180	240	80	160
DC	0.4 to 2.5	27	30	45	70	100	70	100	180	240	80	160
DE	1 to 6	27	40	60	120	140	100	150	240	320	200	400
EA	1.6 to 10	70	100	150	250	450	150	230	800	1000	400	800
EB	2.5 to 16	70	150	275	350	680	250	400	900	1200	500	1000
EC	4 to 25	110	300	450	1050	1350	500	700	1800	2400	1800	3600
ED	10 to 40	110	500	800	1400	1800	800	1200	3000	3200	2100	4200
EF	15 to 75	110	650	1000	1750	2250	1000	1500	3000	4000	3500	7000
FA	10 to 100	155	1000	1500	3500	4500	2000	3000	6000	8000	5000	10000





**Performance Data**

**TABLES 10E, 10F  
MODEL S22  
ADJUSTABLE SWITCHING  
DIFFERENTIAL**

Due to manufacturing tolerances the figures quoted in these tables are for guidance only.

Flameproof models maybe up to 2 times higher depending on the range.

Should the differential be critical for specific applications, our engineers should be consulted prior to ordering.

**TABLE 10**

MODEL S22		PSI UNITS		TABLE 10E				
Range		P <sub>max</sub> psi	SWITCHING OPTIONS SWITCHING DIFFERENTIAL psi					
Code	psi		MIN	OC	MAX	MIN	OD	MAX
DK	4 to 25	400	0.2		1.1	1.0		2.9
DP	6 to 40	400	0.3		1.2	1.3		3.0
DZ	16 to 100	400	0.5		2.8	2.5		7.3
EH	25 to 160	1000	1.9		6.2	6.4		16.0
EM	40 to 250	1000	3.2		9.1	9.6		23.0
ER	60 to 400	1600	9.6		35.0	41.0		88.0
EW	160 to 600	1600	13.0		61.0	57.0		125
EE	250 to 1000	1600	16.0		62.0	80.0		160
F6	160 to 1500	2250	25.0		83.0	96.0		212

MODEL S22		BAR UNITS		TABLE 10F				
Range		P <sub>max</sub> bar	SWITCHING OPTIONS SWITCHING DIFFERENTIAL mbar					
Code	bar		MIN	OC	MAX	MIN	OD	MAX
DB	0.25 to 1.6	27	11		78	66		200
DC	0.4 to 2.5	27	22		82	88		210
DE	1 to 6	27	33		190	170		500
EA	1.6 to 10	70	132		430	440		1100
EB	2.5 to 16	70	220		630	660		1600
EC	4 to 25	110	660		2400	2800		6100
ED	10 to 40	110	880		3300	3900		8600
EF	15 to 75	110	1100		4300	5500		11000
FA	10 to 100	155	1700		5700	6600		14600

**Electrical Connections**

<p><b>Terminal Block</b> Cable entry is to a non-pinching terminal block made of a non-hygroscopic thermo-setting plastic, suitable for cables up to 2.5mm<sup>2</sup>/14AWG.</p>
<p><b>Earthing/Grounding</b> An earthing stud is provided inside all weatherproof enclosures, adjacent to the entry. External earthing is standard on flameproof versions. Safety note see Table 3.</p>
<p><b>Dielectric Strength</b> The electrical assembly is capable of withstanding *2kV between live parts and earth/ground and 500V between open contacts. * 1.2kV for micro switch Codes H2, H3, and H6. Refer to Table 6.</p>
<p><b>Electrical Entry</b> Standard options are listed in Table 3. Other threads can be accommodated by adaptors. Dual entry available, see Table 3.</p>

**Optional Extras**

<p><b>Chemical Seals</b> Chemical seals of our own or proprietary manufacture can be fitted when required.</p>
<p><b>Mounting Position/Location/Installation</b> Vertical as shown, IN DIMENSIONS, taking care to avoid siting in locations that transmit excessive shock or vibration. For further advice contact our engineers.</p>
<p><b>Pollution degree (EN60947-5-1)</b> All products are suitable for use in pollution degree 3. For extreme conditions where condensation may readily form, then sealed contacts should be used. See Table 6 Codes 08/09, 0G/0H, H2/H3/H6.</p>
<p><b>Electrical Isolation</b> These products are not suitable for electrical isolation. Always isolate circuit separately to carry out any electrical work.</p>

## Approvals

### EUROPEAN DIRECTIVES



#### **Low voltage Directive (LVD) 2014/35/EU.**

Compliant to LVD

#### **Pressure Equipment Directive (PED) 2014/68/EU:**

This product has a process connection size  $\leq$ DN25 and is therefore categorised as sound engineering practice under Cat 3.3

#### **ATEX Directive 2014/34/EU**



#### **INTRINSIC SAFETY:**

Certificate No. Baseefa05ATEX0111

EN 60079-0, EN 60079-11

For Zone 0 models (**Enclosure code 4/5, see table 1**)

Because of the low voltages and currents of intrinsically safe circuits, we recommend using gold contacts. Refer to Table 6.



II 1 G Ex ia IIC T6 Ga (Tamb  $-25^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ ) or T5 Ga (Tamb  $-60^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ )

#### **FLAMEPROOF:**

Certificate No. BAS01ATEX2113X

EN 60079-0, EN 60079-1, EN 60079-31, EN 60079-26

For Zone 0/1 models (**Enclosure code 2/3, see table 1**)

#### **Fluorosilicone O-ring**



II 1/2 GD Ex d IIC T6 Ga/Gb (Tamb  $-60^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$ )

Ex ta/tb IIIC T85 $^{\circ}\text{C}$  Da/Db



II 1/2 GD Ex d IIC T5 Ga/Gb (Tamb  $-60^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ )

Ex ta/tb IIIC T100 $^{\circ}\text{C}$  Da/Db

#### **Nitrile O-ring**



II 1/2 GD Ex d IIC T6 Ga/Gb (Tamb  $-30^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$ )

Ex ta/tb IIIC T85 $^{\circ}\text{C}$  Da/Db



II 1/2 GD Ex d IIC T5 Ga/Gb (Tamb  $-30^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ )

Ex ta/tb IIIC T100 $^{\circ}\text{C}$  Da/Db

For Zone 1 models (**Enclosure code H/R, see table 1**)

#### **Fluorosilicone O-ring**



II 2 GD Ex d IIC T6 Gb (Tamb  $-60^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$ )

Ex tb IIIC T85 $^{\circ}\text{C}$  Db



II 2 GD Ex d IIC T5 Gb (Tamb  $-60^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ )

Ex tb IIIC T100 $^{\circ}\text{C}$  Db

#### **Nitrile O-ring**



II 2 GD Ex d IIC T6 Gb (Tamb  $-30^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$ )

Ex tb IIIC T85 $^{\circ}\text{C}$  Db



II 2 GD Ex d IIC T5 Gb (Tamb  $-30^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ )

Ex tb IIIC T100 $^{\circ}\text{C}$  Db

### GLOBAL CERTIFICATION



#### **CANADIAN STANDARDS ASSOCIATION**

Switches - Automatic - Pressure Type - for hazardous locations

Enclosure codes T & U.

Class 1, Groups C & D Class II, Groups E, F, G.

LR94185-2

#### **SAFETY INTEGRITY LEVEL (SIL)**

IEC 61508 Part 1 and 2


Systematic integrity and random integrity SIL2 Capable

Certificate number DC060816C001


# Dimensions

All dimensions mm (inches)


## H, R, T & U ENCLOSURES

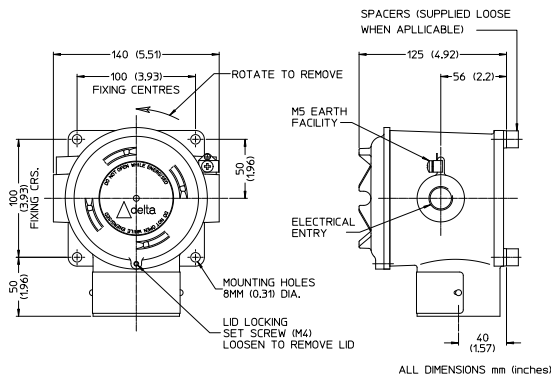


## W/5 ENCLOSURE

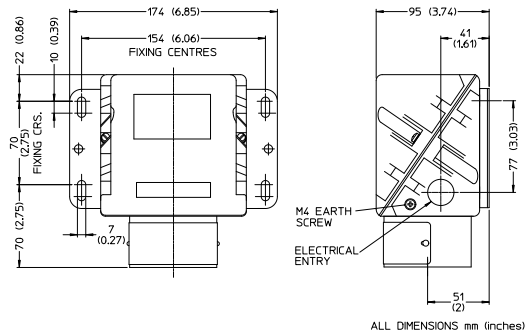

## A/4 ENCLOSURE

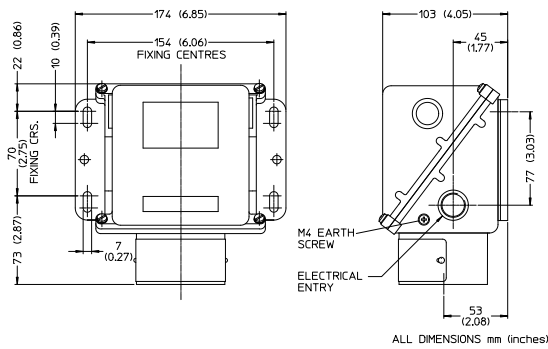


## MODEL S21/2 ALL RANGES EXCEPT CC, CD & CE

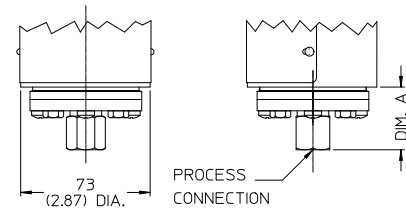

PROCESS CONN.	DIM 'A'
Rc1/4 1/4"NPT INT.	36 (1.41)
1/2"NPT INT. 1/2"NPT EXT.	48 (1.88)

ALL DIMENSIONS mm (inches)


## MODEL S21/2 RANGES CC, CD & CE

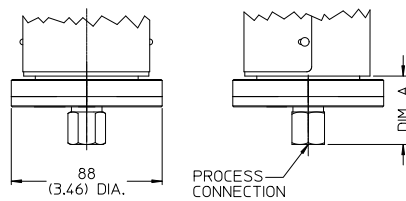

PROCESS CONN.	DIM. A
Rc1/4 1/4"NPT INT.	40 (1.57)
1/2"NPT INT. 1/2"NPT EXT.	52 (2.04)

ALL DIMENSIONS mm (inches)


## MODEL S24 ALL RANGES

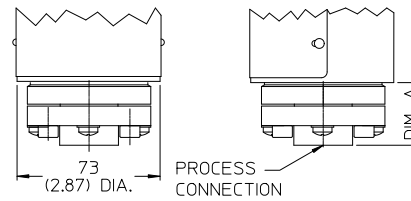

PROCESS CONN.	DIM. A
Rc1/4 1/4"NPT INT.	33 (1.29)
1/2"NPT INT. 1/2"NPT EXT.	45 (1.77)
1/2"NPT EXT.	60 (2.36)

ALL DIMENSIONS mm (inches)

## CABLE GLAND ASSEMBLY

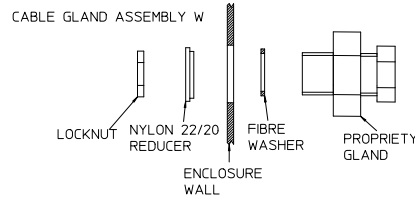

In the interest of development and improvement Delta Mobrey Ltd, reserves the right to amend, without notice, details contained in this publication. No legal liability will be accepted by Delta Mobrey Ltd for any errors, omissions or amendments.

**Delta Mobrey Limited**  
Riverside Business Park, Dogflud Way, Farnham, Surrey GU9 7SS, UK.  
T+44 (0)1252 729140 F+44 (0)1252 729168 E sales@delta-mobrey.com W www.delta-mobrey.com

